


2 TON CAPACITY TRIPOD STAND

MODEL 874A

STRONGARM

Meets or exceeds ANSI standard for performance and safety

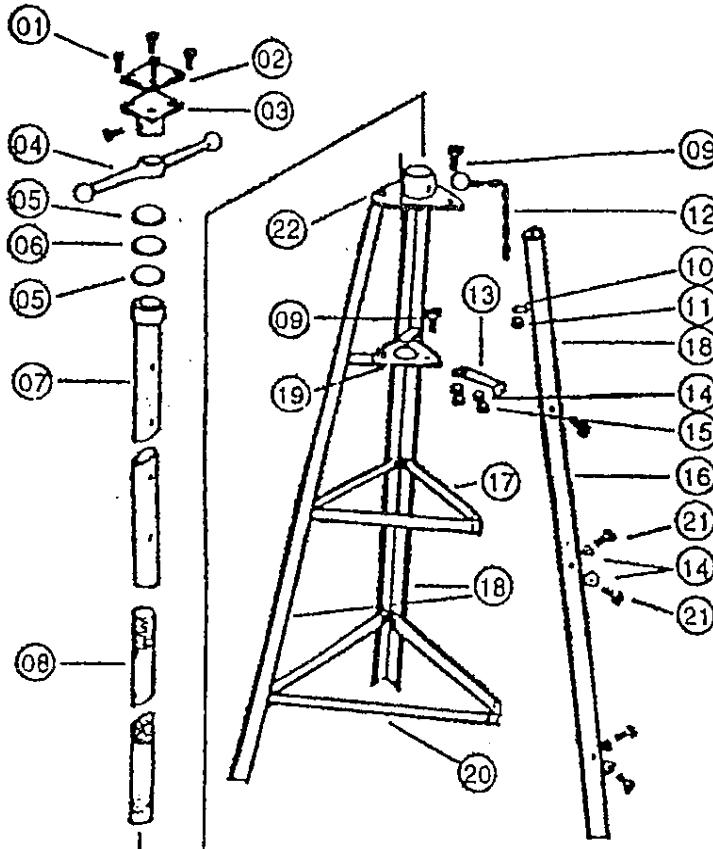

ASSEMBLY:

- 1) Check and sort package contents according to size.
- 2) Bolt Rubber Saddle Pad (02) using Allen Screws (01) on to Saddle Base (03).
- 3) Slide Screw Rod (08) into Upright Tube (07), threads facing up. Install Bearing Washers (05), Bearing (06) and Handle (04) on the Screw Rod (08).
- 4) Install the base of the Saddle (03) into the Screw Rod (08).
- 5) Starting at the bottom, connect Long Brace Support (20) to Legs (18). **DO NOT TIGHTEN BOLTS UNTIL ASSEMBLY IS FINISHED.**
- 6) Bolt Medium Length Support Brace (17) to Legs (18).
- 7) Bolt Lower Support Flange (19) to Short Brace Strap (13) and Legs (18).
- 8) Install and bolt Upper Support Flange (22) to top of stand.
- 9) Slide Upright Tube (07) assembly into Upper Support Flange (22) and Lower Support Flange (19). Using the Detent Pin (12) lock Upright Tube (07) into place.
- 10) **MAKE SURE ALL BOLTS ARE TIGHTENED BEFORE USING.**

WARNING!

FOR YOUR SAFETY & TO PREVENT INJURY

This is NOT a vehicle support stand.
 DO NOT use this stand beyond its rated capacity.
 DO NOT use this stand for lifting the vehicle.
 Use only on a hard, level surface.

PART	DESCRIPTION	QTY	PART	DESCRIPTION	QTY
874AP01	Allen Screw	5	874AP12	Detent Pin & Chain Assy.	1
874AP02	Rubber Saddle Pad	1	874AP13	Short Brace Strap	3
874AP03	Saddle	1	874AP14	Split Lock Washer	15
874AP04	Handle	1	874AP15	Nut	3
874AP05	Bearing Washer	2	874AP16	5/16" 18 x 3/4" Bolt	3
874AP06	Bearing	1	874AP17	Medium Length Brace	3
874AP07	Upright Tube	1	874AP18	Leg	3
874AP08	Screw Rod	1	874AP19	Lower Support Flange	1
874AP09	3/8" 16 x 1" Bolt	6	874AP20	Long Brace Support	3
874AP10	Split Lock Washer	6	874AP21	5/16" 18 x 1/2" Bolt	12
874AP11	Nut	6	874AP22	Upper Support Flange	1