

THE ALL- NEW XS2-500









- ABS shell high strength and lightweight.
- EPP liner protection from side impact, slips, trips and falls.
- 6-point suspension with 370 Speed Dial ratchet and "Quick-Fit" headband.
- Size 6-1/4 to 8-1/2 (52 cm 68 cm)
- 4-point chin strap with synthetic leather band.

- Non-Vented: Meets and exceeds CSA Z94.1-15 (R2024) Type II, Class E, Meets ANSI/ISEA Z89.1-2014 (R2019) Type II, Class E, HT, LT and EN 12492 4.2.4
- Vented: Meets and exceeds CSA Z94.1-15 (R2024) Type II, Class C, Meets ANSI/ISEA Z89.1-2014 (R2019) Type II, Class C, HT, LT and EN 12492 4.2.4

- Vented (Class C) and Non-Vented (Class E) versions
- With and without high-impact (ANSI Z87.1+) polycarbonate visor



















Industrial & Manufacturing





JACKSON®














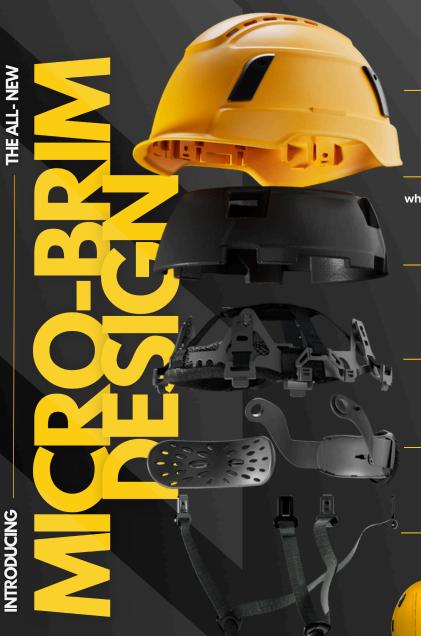

ABS SHELL

Tough and lightweight in both extreme heat and freezing temperatures

MICRO-BRIM DESIGN

Engineered for unobstructed sightlines, while smart rain-channeling keeps water off your face and neck

EPP LINER

Protection from side impact, slips, trips and falls

6-POINT COMFORT PLUS AIR-COOLED SUSPENSION

Designed for enhanced airflow, reducing heat buildup and keeping you cool and comfortable

QUICK-FIT HEADBAND

6-point suspension with 370 Speed Dial ratchet and "Quick-Fit" headband

4-POINT CHIN STRAP

with synthetic leather band




NO DRIPS. NO DISTRACTIONS.

Enhanced rain protection by directing water to the sides, keeping it from dripping into the user's face or down the back of the neck.



FITS EVERY HEAD. PROTECTS EVERY WORKER

Easy Grip-Easy Turn – 370 Speed Dial ratchet adjusts to the widest range of head sizes $6\frac{1}{2}$ – $8\frac{1}{2}$ (52 cm – 68 cm) ensuring a secure and personalized fit.





ORT IN EVERY CURV OW IN EVERY MOVE. E ULTIMATE HEAT STRESS SHIELD.

The 6-Point Comfort Plus Air-Cooled Suspension is engineered for airflow, not just fit. By allowing heat to escape and fresh air to circulate, it fights heat stress better than any helmet in its class—keeping you cool, focused, and ready to work.

























THE ALL- NEW XS2-500







Non-Vented: Meets and exceeds

Class E, Meets ANSI/ISEA Z89.1-

2014 (R2019) Type II, Class E, HT,

Vented: Meets and exceeds CSA

Z94.1-15 (R2024) Type II, Class C,

Meets ANSI/ISEA Z89.1-2014

(R2019) Type II, Class C, HT, LT

CSA Z94.1-15 (R2024) Type II,

LT and EN 12492 4.2.4

and EN 12492 4.2.4



ODELS

 Vented (Class C) and Non-Vented (Class E) versions

 With and without high-impact (ANSI Z87.1+) polycarbonate visor

d de

- ABS shell high strength and lightweight.
- EPP liner protection from side impact, slips, trips and falls.
- 6-point suspension with 370 Speed Dial ratchet and "Quick-Fit" headband.
- Size 6-1/4 to 8-1/2 (52 cm 68 cm)
- 4-point chin strap with synthetic leather band.



Prod. Number	Venting	Colour
22100	Non-Vented	White
22101	Non-Vented	Yellow
22102	Non-Vented	Blue
22103	Non-Vented	HV Orange 🔚
22104	Non-Vented	Black 🗏
22106	Non-Vented	HV Green
22107	Non-Vented	Red 🔚
22108	Non-Vented	Gray
22120	Vented	White
22121	Vented	Yellow 📙
22122	Vented	Blue 📕
22123	Vented	HV Orange 🔚
22124	Vented	Black 🗏
22126	Vented	HV Green
22127	Vented	Red
22128	Vented	Gray