

U.S. SAFETY CATALOG PPE & WELDING















TABLE OF CONTENTS

| WELDING | |
|----------------------------------|-----------------|
| HELMETS & ACCESSORIES | <u>8–47</u> |
| HELMET / HARD HAT | |
| MOUNTING SYSTEMS | 48-49 |
| FILTERS & PLATES | <u>50-57</u> |
| CONNECTORS, CLAMPS, | |
| & ELECTRODES | <u>58–59</u> |
| PIPE & TOOL MARKING ACCESSORIES. | |
| CURTAINS & BLANKETS | <u>64–75</u> |
| | |
| PPE | |
| FACE PROTECTION | . <u>79–111</u> |
| EYE PROTECTION — | |
| SAFETY GLASSES | |
| EYE PROTECTION — GOGGLES | 128–143 |
| EMERGENCY EYEWASH PRODUCTS | |
| HEARING PROTECTION | |
| HEAD PROTECTION | |
| RESPIRATORY PROTECTION | <u>174–175</u> |
| KNEE & ELBOW PROTECTION | <u>177–181</u> |
| SLIP PROTECTION / | |
| ICE & SNOW TRACTION | 182–196 |
| | |

SAFETY APPAREL HI-VIS SAFETY VESTS, SASHES, & GAITERS...

| II-VIO SALLIT VLOTO, | |
|--------------------------------|---------|
| SASHES, & GAITERS | 202-213 |
| II-VIS SAFETY SHIRTS & HOODIES | 214-216 |
| II-VIS TRAFFIC SAFETY WEAR | 217 |
| H-VIS SAFETY | |
| RAINWEAR & JACKETS | 218-225 |
| LAME-RESISTANT SAFETY WEAR | 226-227 |
| SAFETY APPAREL | |
| STANDARDS & SIZING | 228-234 |
| | |

FALL PROTECTION

| HARNESSES & BELTS |
|--|
| SELF-RETRACTING LIFELINES |
| LANYARDS |
| VERTICAL LIFELINES & ROPE GRABS 275–277 |
| ANCHORAGE CONNECTORS278-282 |
| TANK TROLLEYS |
| KITS284-296 |
| HARDWARE & ACCESSORIES 297 |
| LADDER SAFETY SYSTEM298-305 |
| EMERGENCY DESCENT SYSTEMS306-307 |
| ENGINEERED SYSTEMS308 |
| TOOL TETHERING SYSTEMS309-314 |
| STANDARDS & REGULATIONS 315 |



ABOUT SureWerx

BE SMART. BE SAFE. BE SURE.

At SureWerx, our mission is to produce the most innovative and rigorously tested products for our customers' safety, productivity, and comfort. Our head-to-toe product portfolio consists of over a dozen leading brands with a full offering of PPE, safety, and equipment solutions.

No one works harder to keep workers and communities productive and safe. That's the SureWerx promise.



















"We want all of our distributor partners and the end users of our products to experience tangible value for the products and services we offer and we will continue to enhance that proposition vastly over the coming years "

- A message from our CEO, Chris Baby

Industries Served



MANUFACTURING/MRO

INDUSTRIAL

WELDING

INFRASTRUCTURE & CONSTRUCTION **SAFETY**

The Quality You Have Come to Expect

Products Made to Perform — All products are designed to maximize safety, productivity, and comfort to help workers perform at their best. Certified To Be Safe — The SureWerx family of products are tested to meet or exceed the rigorous standards for quality and safety performance by ANSI, CSA, CE, and more, but we don't stop there. We further ensure the safety of our products by managing our own in-house, fully accredited test lab which carefully monitors all products prior to leaving our state-of-the art distribution center.

Confidence In Our Quality — We offer some of the most comprehensive warranties in the industry. Wherever the job takes you,



Digital Solutions





Visit us at surewerx.com/usa jacksonsafety.com sellstrom.com duenorthproducts.com fallprotection.com





TECHNICAL DATA SHEETS



DOWNLOADS



VIDEO LIBRARY





ENERGY/ OIL & GAS **FOOD PRODUCTION**

TRANSPORTATION & AUTOMOTIVE AFTERMARKET

HEALTH CARE

RETAIL



YOUR BEST WORK YET... NEEDS YOUR TOTAL FOCUS

The safety and productivity of every professional worker is our goal. Our mission is to design products that deliver on this goal. We are always finding better ways to help increase worker productivity and safety.



Every day, hundreds of professional workers are injured at work — industrial accidents are avoidable.



Our goal is to ensure that you return home after a safe and productive day at work in the same healthy condition as you went to work.



Legislation and regulation continue to increase safety at work, and all of our products will meet or exceed the necessary levels.




We will also work to ensure that all of our distributors receive product knowledge training to ensure they provide the right product for the right application. We are committed to understanding the needs of the professional end users.



When workers are confident that their PPE is designed with their health and safety in mind, they can concentrate on the job at hand, achieving maximum productivity.







PRODUCTIVITY

Be Smart. Be Safe. Be Sure.





EXCLUSIVE!



The World's Greatest Ratcheting Headgear System — Period!

Our patented Jackson Safety® **370 Speed Dial™** offers the fastest, easiest, and most efficient ratcheting headgear system in the industry today! The 370 Speed Dial™ incorporates two unique designs – an oversized ratcheting adjuster knob, and a patented "quick-fit" rear headband that swivels up and down. Together, these two features combine to achieve a perfect fit every time, increasing safety, productivity and satisfaction. Try any of our industry-leading Jackson Safety® products that incorporate our famous 370 Speed Dial™ and experience the difference yourself!







The 370 Speed Dial[™] ratcheting headgear can be found on these exclusive Jackson Safety[®] industry-leading products. More new products coming soon!




Jackson Safety® — Your First Choice for Premium Safety Products for Over 90 Years!

Please note: Our SC-6 and Blockhead hard hats use a modified version of the face shield/welding helmet version shown. All products feature the exclusive 370 Speed Dial™ for "Easy Grip-Easy Turn" adjustment.





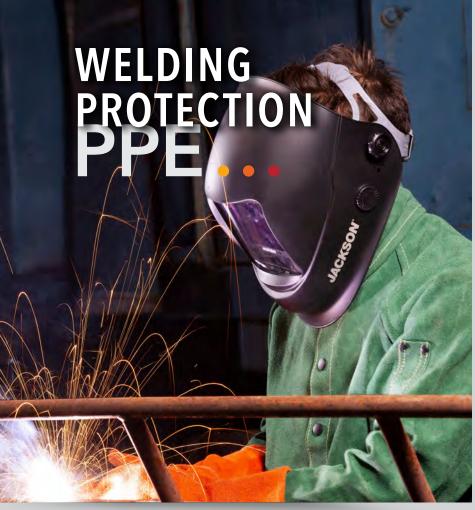









WELDING HELMETS AND WELDING FILTERS

Designed to perform in a wide range of welding applications, Jackson Safety®, Huntsman®, and Sellstrom® welding helmets are available in a variety of styles, shapes and base materials including our latest Translight 455 Flip, Translight+ Extra-Large View ADF helmets, and the new Rebel welding mask.

Choose from a selection of filters – from *passive* to *digital ADF* platforms and numerous graphic designs to reflect personal style.





PASSIVE VS. AUTO-DARKENING FILTER HELMETS

Passive helmets offer great protection.

Auto-Darkening Filters offer protection and productivity.

Both passive and Auto-Darkening Filter (ADF) welding helmets provide excellent eye protection. Research shows that ADF helmets also offer impressive productivity gains, as well as greater user comfort.

ADDED BENEFITS OF AN ADF

Increased accuracy

Because the welder can always see what he's doing, and start in exactly the right spot.

Increased comfort

By eliminating the repetitive "lifting and nodding" that can cause neck strain.

Increased protection

From injuries caused by welding, chipping, or grinding in the proximate area.

Increased peace of mind

Because even if the ADF should not become active during an arc, it still protects eyes from serious damage.

Increased productivity

By eliminating the time it takes to lift and nod the helmet before and after each weld.

Welders at all experience levels know the value and essential protection requirements of the right helmet and filter for the right job. That's why we provide a range of welding helmets and filters with features that are just right for you.



True Color ADF

Jackson Safety and Sellstrom auto-darkening filters with premium 1/1/1/1 optical classification and True Color technology provide:

A clear view from various angles

Which can reduce eye fatigue (the need to move, adjust and refocus).

Superior optical quality

Allows you to do your most creative and productive work.







Be Smart, Be Safe, Be Sure,

WELDING FILTERS

SAFETY FIRST

Meets ANSI, CSA, and CE standards

ADFs are built and tested to meet or exceed ANSI, CSA, and CE standards

Protection against UV and IR light

ADFs are designed so that regardless of dark or clear state welder's eyes are **always protected** against harmful UV and IR light occurring during welding process.

Excellent switching speed

Switching speed and detection of welding arc **prevent light flash** from reaching welder's eyes.

Safe in any weld process

Variable shade level, sensitivity and delay allow for **adjusting protection** parameters to any weld process.





EASE OF WORK

ADFs can be adjusted to any type of welding by selecting shade level, sensitivity to welding arc, and opening time delay.

Selectable operation mode (Weld/ Grind/Cut) allows for permanent eye protection during the whole metal processing operation.

Increased productivity as both hands can be used.

Simple welding tasks

Use passive or single shade ADFs.

Entry level welding tasks

Limited shade range, average speed, and window size – cost effective.


Professional tasks

All required features at moderate cost with added functionality.

Extremely demanding tasks

Highest optical performance, switching speed, sensitivity range and various modes of operation.



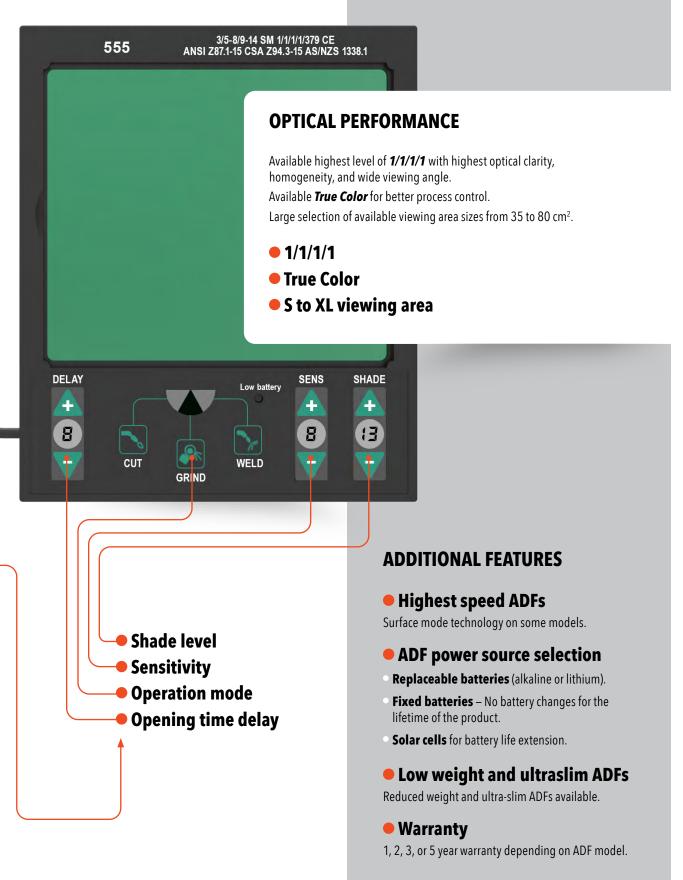

JACKSON°



TrueSight II Digital Variable Auto-Darkening Filter Welding Helmet with Balder Technology





THE BALDER DIFFERENCE

World Class Optics. Advanced Technology. Continuous Improvements in Productivity and Safety.

These are the key features that separate a Jackson Safety welding helmet from the competition, and our patented Balder Technology continues to the set the standard for professional-grade welding helmet ADFs.

With Balder Technologies' crystal clear optics, Jackson Safety has become the world-class leader in auto darkening filters. Balder was first to market achieving the highest 1/1/1/1 standard for optical clarity. Over the years, Balder has helped develop several unique, proprietary technologies that you can only find under the Jackson Safety brand. Today, we offer the widest range of technologies and the most auto-darkening filters achieving top optical clarity on the market.

Surface Mode Technology

In the light state of a surface-mode liquid crystal display, only the liquid crystal molecules at the outside surfaces are at rest with their long axis parallel to the display's outer surfaces. The liquid crystal at the center of the display is aligned perpendicular to the outside display surfaces. When the high voltage pulse is applied, only the molecules near the surface need to rotate the full 90 degrees as the filter switches. Therefore, the switching speed is much faster.

• Surface Mode Series options: NexGen

Twisted Nematics Technology

Twisted nematics liquid crystal display molecules in the light state are parallel to the display's outer surfaces. When the high voltage pulse is applied, the molecules rotate a full 90 degrees.

This technology is commonly used in many of the welding helmets on the market today.

• Twisted ADF Series options: Insight, 555, 455

Super Twisted Nematics Technology

Similar technology to twisted nematics, only the molecules are now rotated a full 180 degrees. This greatly improves on optical clarity consistently, and far surpasses the highest optical clarity standards of 1/1/1/1.

• Super Twisted ADF Series options: TrueSight II

Why Balder & Jackson Safety?

- Most 1/1/1/1 top optical clarity ADFs
- Most types of in-use technology
- The best warranty program at 5 years
- Options available for every type of welder
- Over 85 years of product experience

What is Optical Class?

Optical class is becoming a global standard that originates as a European standard tested by third parties. Welding helmets' auto-darkening filters are rated from 1 (best) to 3 (worst) in the following optical classes: Optical Clarity, Diffusion of Light, Homogeneity, and Angular Dependence. 1/1/1/1 is the best rating an auto-darkening filter can achieve.




Optical Clarity

Measures how clear or distorted objects look through the filter




Diffusion of Light

Looks at impurities of the glass



Homogeneity

Examines the consistency of the shade at different parts of the glass



Angular Dependence

Looks at shade consistency at different angles



NEW! NEW! UPGRADED!

| | | NEW! | NEW! | UPGRADED! | | | | | |
|--|--|--|--|---|---|---------------|-----------------------------------|---------------|--------------|
| ADF SERIES | TRUESIGHT II | 555 | 455 | INSIGHT | S26400 | S26200 | NEXGEN | S26100 | WH30 |
| | :** !!! | 62610 | ••• | (0) | 10 H C | (A A A | • | | - in |
| Quality | *** BEST | *** BEST | *** BEST | *** BEST | → ** BETTER | ** BETTER | ** BETTER | * GOOD | * GOOD |
| Compatible Shells | HLX | Translight+ | Translight Flip | HLX, HSL | WHP | WHM | HLX, HSL | WHB | Advantage |
| Available Designs | Black, graphics | Black | Black, black with hard hat | Black, graphics | Black | Black | Black, graphics | Black | Silver |
| Shade Range | 4, 5-13 | 3, 5-14 | 4, 5-13 | 4, 9-13 | 4, 5-13 | 4, 9-13 | 4, 9-13 | 4, 9-13 | 4, 9-13 |
| Switching Speed | 1/8,700 sec | 1/25,000 sec | 1/40,000 sec | 1/10,000 sec | 1/20,000 sec | 1/15,000 sec | 1/15,000 sec | 1/10,000 sec | 1/2,100 sec |
| Cartridge Size | 4.5" x 5.25" | 4.5" x 5.25" | 90 x 100mm | 4.5" x 5.25" | 4.5" x 5.25" | 4.5" x 5.25" | 4.5" x 5.25" | 3.54" x 4.33" | 3.5" x 4.33" |
| Viewing Area | 3.25" x 4" | 3.23" x 3.86" | 2.5" x 3.86" | 2.35" x 3.8" | 3.28" x 3.94" | 2.36" x 3.94" | 2.35" x 3.8" | 1.57" x 3.54" | 1.65" x3.78" |
| Viewing Area sq. in. | 13 sq. in. | 12.47 sq. in. | 9.65 sq. in. | 8.93 sq. in. | 12.92 sq. in. | 9.30 sq. in. | 8.93 sq. in. | 5.56 sq. in. | 6.24 sq. in. |
| Optical Clarity | 1/1/1/1 | 1/1/1/1 | 1/1/1/1 | 1/1/1/1 | 1/1/1/1 | 1/1/1/2 | 1/2/1/2 | 1/1/1/2 | 1/1/1/2 |
| True Color | • | • | • | • | • | | | | |
| Welding | • | • | • | • | • | • | • | • | • |
| Grinding | • | • | • | • | • | • | • | • | |
| Cutting | • | • | • | | • | | | | |
| TIG < 5 amps or Pulse TIG | • | • | • | • | • | | • | | |
| Torch & Grind | • | • | • | | • | | • | | |
| Submerged Arc | • | • | • | • | • | • | • | • | • |
| Plasma Arc, Stud Arc, Electrogas, Electroslag, Flux Cored ARC, STICK, MIG | • | • | • | • | • | • | • | • | • |
| 370 Speed Dial Headgear | 370 SPEED DIAL | 370 SPEED DIAL | 370 SPEED DIAL | 370 SPEED DIAL | No | No | 370 SPEED DIAL | No | No |
| Special Features | True Color tech, large viewing area | External fine shade tuner and grind button | Industry-leading extra large grinding face shield | Professional grade at market-friendly price, newly improved optical clarity | Saves up to three preset welding configurations | | Unique surface mode technology | Value priced | |
| Warranty | 5 years | 3 years | 3 years | 2 years | 2 years | 2 years | 2 years | 2 years | 2 years |

sellstrom. **SELECTING THE BEST SHADE FOR THE JOB**

According to OSHA, the intensity of visible light and radiant energy produced by operations varies depending on the task, the electrode size, and the arc current. Workers involved in welding, cutting, and brazing operations must use appropriate welding protection depending on specific welding operations.


Only filter lenses with the appropriate shade number will provide protection against optical radiation. Filter lenses must coincide to specific radiant energy exposure. Welding protectors are constructed of heat resistant material such as vulcanized fiber or fiberglass and fitted with a filtered lens to protect workers' eyes from burns caused by infrared or other intense radiant energy. These devices protect the eyes and face from flying sparks, metal spatter, and slag chips produced during welding, brazing, soldering, and cutting.

Welding helmets are secondary protectors intended to shield the eyes and face from optical radiation, heat, and impact. Use welding helmets in addition to primary protection such as safety spectacles or goggles to provide adequate protection.







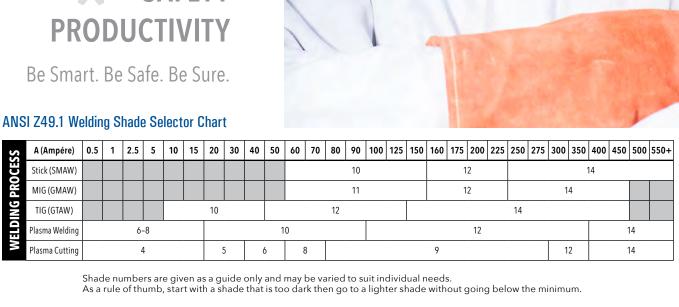



sellstrom_®

WELDING HELMET SHELLS – ADF OPTIONS

| ADF | | | JACKSON SAFETY | | | SELLSTROM | | |
|---------------------------------------|---|---|---|---|---|--|--|--|
| SERIES | TRANSLIGHT+ | TRANSLIGHT FLIP | REBEL | HLX (HALO X) | HSL (SHADOW) | WHP | WHB | |
| | ucasar 15 | | JAG | | | | sallstram. | |
| Key Features | Modern design to reduce spark and spatter landing points, large viewing window, engineered to reduce neck strain | Flip-style welding helmet with large 46" face shield viewing area and top grade welding ADF | An exclusive compact welding mask featuring modern digital ADF controls. Ideal for use under hard hats and comes with FR hood | Made with patented hydroflex plastic, ultra lightweight at 6 oz. | Classic HSL Shadow style helmet, narrow and designed with additional neck protection from sparks and spatter | Ultra-lightweight, modern design for optimal comfort | External controls to adjust shade or grind mode without removing helmet | |
| Cartridge Size | 4.5" x 5.25" | 90 x 110mm | 2" x 4.25" | 4.5" x 5.25" | 4.5" x 5.25" | 4.5" x 5.25" | 3.54" x 4.33" | |
| Cartridge Size Grinding Face Shield | No | Yes | No | No | No | No | No | |
| 370 Speed Dial Headgear | 370 SPEED DIAL | 370 SPEED DIAL | No | 370 SPEED DIAL | 370 SPEED DIAL | No | No | |

WELDING HELMET SHELLS – PASSIVE OPTIONS

| PASSIVE | | | JACKSON SAFET | Υ | | | SELLSTROM | |
|----------------------------|--|---|--|--|--|---|--|---|
| SERIES | HUNTSMAN 900 SERIES | HUNTSMAN 400 SERIES | HUNTSMAN LEATHER | HSL-2 (SHADOW) | HSL-1 (SHADOW) | 290 SERIES | 280 SERIES | CONFINED SPACE |
| | | B | | | | | | * |
| Key Features | Lightweight and highly washable | Made with vulcanized fiber to withstand higher heat applications | Flexible for confined space use, full head coverage | Lift front-style helmet to easily switch from welding to grinding function | Classic passive helmet with extended neck protection from sparks and spatter | Contains extended bib for added spark and spatter protection | Round configuration helps reduce sparks and spatter from sticking to helmet | Designed for confined space, with leather bib for additional spark protection |
| Compatible Options | 4.5" x 5.25" 2" x 4.25" lift front | 4.5" x 5.25" 2" x 4.25" lift front 2" x 4.25" fixed front 2" x 4.25" quick slide | Lift front Lift front (no headgear) | 2" x 4.25" lift front | 2" x 4.25" fixed front | 2" x 4.25" lift front 2" x 4.25" fixed front 4.5" x 5.25" fixed front | 2" x 4.25" lift front 2" x 4.25" fixed front 4.5" x 5.25" fixed front | 2" x 4.25" lift front |
| 370 Speed Dial Headgear | No | No | No | 370 SPEED DIAL | 370 SPEED DIAL | No | No | No |

NEW ULTRA-LIGHTWEIGHT WELDING HELMET OPTIONS







46240

46200



ADF WELDING MASK — REBEL™







The all new, exclusive Jackson Safety* Rebel™ welding mask is a great addition to our welding program, incorporating modern ADF technology. The Rebel™ is a lightweight product designed to reduce neck strain. In addition, the Rebel is designed to fit under most hard hats, including Jackson's Charger, Sentry III, SC-6, Advantage Series, and Blockhead models without the need for adaptor brackets, making it extremely versatile.

- The Rebel features an exclusive, modern digital ADF control system
- Goggles are constructed with the face shield as one complete unit
- Complete protection from sparks and spatter risks to front of face when used with the fire-resistant hood
- The Rebel's close-fitting goggle protects against UV and IR rays when used with the fire-resistant hood
- $\bullet \ \ {\sf Designed} \ to \ {\sf fit} \ {\sf over} \ {\sf most} \ {\sf prescription} \ {\sf glasses} \ {\sf --} \ {\sf no} \ {\sf cheater} \ {\sf lenses} \ {\sf required}$
- Features a replaceable clear outer lens for added ADF protection (46930 5 pack)
- Packaged in attractive, full-color POP box case quantity 6
- No adapters needed to use with hard hats
- Low TIG amp rated >10A
- Battery life lasts up to 1,300 hours (batteries replaceable)
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards. CE certified





46200



| PRODUCT NO. | Filter Dimensions | Viewing Area | Shade Range | True Color | Modes | Optical Clarity | Switching Speed | Controls | Weight | No. of Sensors | TIG Rating | Warranty |
|----------------|----------------------|---------------|-------------|------------|---------|--------------------|--------------------|----------|---------|-------------------|---------------|----------|
| 46200 | 2" x 4.25" | 1.38" x 3.54" | 3, 5 to 12 | Yes | Welding | 1/1/1/2 | 1/15,000 sec. | Digital | 8.8 oz. | 2 | >10A | 2 years |







ADF WELDING MASK — REBEL™



** BETTER

| PRODUCT NO. | Description | Case Qty. |
|-------------|---|-----------|
| 46200 | Rebel ADF Digital Welding/Goggle Mask (Kit) | 6 |
| 46600 | Replacement Fire-Resistant Hood | 10 |
| 46930 | Rebel [™] Replacement Lens Kit (Pack contains 5 External and 3 Internal Lenses) | 100 |







EXCLUSIVE!





TRANSLIGHT[™]+ 555 PREMIUM LARGE-VIEW ADF WELDING HELMET

The new Jackson Safety **Translight™ Series** contains our latest innovative welding helmet designs. We mix industry leading features with new advancements in technology to transcend the welding industry.

All Translight[™] helmets come with our patented 370 Speed **Dial**[™] ratcheting headgear system, to create the ultimate

functionality. The latest advancements in True Color technologies are included for optimum welding optics. Our Translight™ product line is packed with new features and improvements to keep workers safe and highly productive.














555 Digital ADF

NEW!

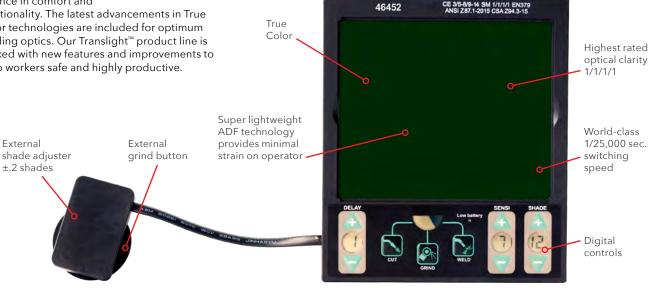



ADF WELDING HELMETS — TRANSLIGHT™+ SERIES



Translight[™]+ 555 Premium Auto Darkening Helmets



- Translight[™] shell has a sleek modern design a Jackson exclusive!
- Helmet is super lightweight and ergonomically balanced to reduce stress and fatigue
- Auto darkening filter meets 1/1/1/1 Optical Clarity Standard, the highest in the industry
- Includes an external grind button so end users can switch modes with ease
- Features the new external shade adjuster to help aid in visual focus
- The shade adjuster can finely tune shades up to ±1 full shade with .2 shade adjusting increments
- Welding, grinding, cutting, and carbon arc gouging can be performed with the versatile 555 ADF
- Includes patented 370 Speed Dial ratcheting headgear system
- Advanced digital controls are a great quality-of-life enhancement for welders
- Switching speeds of 1/25,000 second
- Packaged in attractive, full-color POP box case quantity 4
- Powered by solar technology and two CR2032 replacement batteries
- Touch pad controls allow quick and easy function selection
- Features integrated mag lens holder
- Industry leading 3/5–14 Shade range allows use in high amp welding applications
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards. CE certified





46250

| PRODUCT NO. | Filter Dimensions | Viewing Area | Shade Range | True Color | Modes | Optical Clarity | Switching Speed | Controls | ADF Weight | Total Weight | No. of Sensors | TIG Rating | Warranty |
|----------------|----------------------|---------------|----------------|---------------|--|--------------------|--------------------|----------|---------------|-----------------|-------------------|---------------|----------|
| 46250 | 4.5" x 5.25" | 3.23" x 3.86" | 3, 5 to 14 | Yes | CAG, welding, cutting, grinding | 1/1/1/1 | 1/25,000 sec. | Digital | 7.6 oz. | 1.35 lbs. | 4 | >3A | 3 years |

EXCLUSIVE!



| PRODUCT NO. | Description | Case Qty. | PRODUCT NO. | Description | Case Qty. |
|-------------|---|-----------|-------------|---|-----------|
| 46250 | Translight+ 555 ADF Helmet Complete | 4 | 46925 | 555 External Safety Plate (Pack of 10) | 100 |
| 46452 | Translight+ 555 Replacement ADF only | 10 | 46995 | 555 Replacement Retainer | 10 |
| 46550 | Translight+ Replacement Shell – Black | 20 | 20693 | Translight 555+ Replacement 370 Headgear | 6 |
| 46915 | 555 Internal Safety Plate (Pack of 10) | 100 | 32187 | Replacement Washable Sweatband – 2/pack | 24 packs |

Super lightweight and ergonomically balanced to reduce stress and fatigue

True Color ADF 1/1/1/11 rating; 4.5" x 5.25" filter size

Switching speeds of 1/25,000 sec

Four-sensor technology

Specially designed neck bib provides superior protection from spatter

12.47 sq. viewing area!

Designed for use with respirators

370) SPEED DIAL

Features Jackson Safety® premium 370 series Easy Grip-Easy Turn ratcheting mechanism – an industry best!

Convenient external grind mode button

External shade adjuster – finely tune shades up to ±1 full shade in .2 shade increments





TRANSLIGHT[™] **455 FLIP** — PREMIUM FLIP ADF WELDING HELMET



Featuring the exclusive Jackson Safety® 370 Speed Dial™ ratcheting headgear system!

The **Translight**™ 455 Flip helmet delivers world-class grinding and welding with the flip of the lid. This super-lightweight helmet offers the ability to perform pre/post preparation work and welding operations in one versatile product. The combination of a robust welding helmet and oversized grinding visor (46 sq. in.) makes this unique system suitable for all metal fabrication applications.

We have also fitted the Translight™ 455 Flip with the highest rated 1/1/1/1 optical clarity filter for improved welding efficiency while reducing operator fatigue. Professional grade components for professional grade welders.



True Color

Super lightweight ADF and shell technology ensures minimal operator strain and fatigue












455 Digital/Analog ADF

NEW!

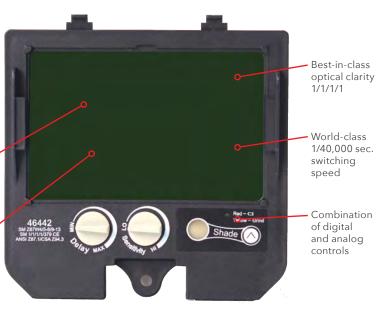



ADF WELDING HELMETS — TRANSLIGHT™ FLIP SERIES

*** BEST

Translight[™] 455 Flip Premium Auto Darkening Helmets

NEW!

- Translight™ 455 Flip welding helmet comes with an easy-to-use lift mechanism to raise up the welding ADF assembly, which exposes a clear face shield window for grinding and chipping operations, offering exceptional peripheral vision
- The Jackson Translight™ 455 Flip welding helmet features a modern, carefully designed sleek, ergonomic super-lightweight shell and ADF, ensuring maximum protection while providing optimal comfort and reduced operator stress and fatigue
- Auto darkening filter meets 1/1/1/1 Optical Clarity Standard, the highest in the industry
- The shell contains left-to-right tabs that allow easy raising and lowering of the flip module
- Welding, grinding, cutting, and carbon arc gouging can be performed with the versatile 455 welding helmet
- Includes patented 370 Speed Dial ratcheting headgear system
- Switching speeds of 1/40,000 sec. are the quickest in the industry
- Low TIG amp rated >2 amps
- Powered by solar technology and two CR2032 replacement batteries
- Packaged in attractive, full-color POP box case quantity 4
- Features integrated mag lens holder
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards. CE certified





46240

| PRODUCT NO. | Filter Dimensions | Viewing Area | Shade Range | True Color | Modes | Optical Clarity | Switching Speed | Controls | ADF Weight | Total Weight | No. of Sensors | TIG Rating | Warranty |
|----------------|----------------------|--------------|----------------|---------------|--|--------------------|--------------------|--------------------|---------------|-----------------|-------------------|---------------|----------|
| 46240 | 90 x 110mm | 2.5" x 3.86" | 4, 5 to 13 | Yes | CAG, welding, cutting, grinding | 1/1/1/1 | 1/40,000 sec. | Digital/ Analog | 4.1 oz. | 1.6 lbs. | 4 | >2A | 3 years |

46240

EXCLUSIVE!



| PRODUCT NO. | Description | Case Qty. | PRODUCT NO. | Description | Case Qty. |
|-------------|---|-----------|-------------|--|-----------|
| 46240 | Translight 455 Flip Welding Helmet with ADF – Black | 4 | 46914 | Translight 455 Internal Safety Plate (Pack of 10) | 100 |
| 46442 | Translight 455 Flip Replacement ADF | 10 | 46923 | 455 External Safety Plate (Pack of 10) | 100 |
| 46540 | Translight 455 Flip Replacement Shell – Black | 20 | 46991 | 455 Flip Spring Mechanism Kit | 10 |
| 46640 | 455 Flip Clear Face Shield Replacement Windows (Pack of 5) | 10 | 20693 | Translight 455 Flip Replacement 370 Headgear | 6 |
| | | | 32187 | Replacement Washable Sweatband – 2/pack | 24 packs |

Super lightweight ADF and shell True Color ADF technology ensures minimal operator 1/1/1/1 rating strain and fatigue ADF controls are easily accessible when in the up position Extra-large face shield -46 sq. inch Superior **JACKSON** peripheral vision Specially designed neck bib provides superior protection from spatter

Convenient left and right tabs allow easy raising and lowering of the flip module

The ADF flip module has been specially designed to allow a completely unobstructed view when in the up position

viewing area!

SPEED DIAL

Features Jackson Safety® premium 370 series Easy Grip-Easy Turn ratcheting mechanism – an industry best!

JACKSON

Halo X shell



BEST

The TrueSight II is one of Balder's most recent creations, enhancing their standards as one of the best ADFs globally. This auto-darkening filter contains another achievement with highest rated 1/1/1/1 optical clarity. Enhanced features include grinding and torch modes, as well as increased shade ranges for the serious professional welder.

ADF WELDING HELMETS — TRUESIGHT® II SERIES



Balder Technology makes it easier to perform a variety of welding related processes at your best. The Balder sensors can pick up as little as .5 amps, and provide a superior experience for the serious TIG welder. Couple this with an industry-best 5-year warranty. You can rest comfortably at night knowing you are providing your eyes, neck, and head with a leading helmet to help you work safe.

- Comes with patented Balder technology for superior optics
- Features highest rated optical class 1/1/1/1
- Intuitive digital controls
- Weld/Torch/Grind mode compatible
- Uses two AAA batteries, replaceable
- Low battery indicator
- Built-in magnification lens holder
- Comes with patented 370 Speed Dial headgear
- Available in a variety of graphics
- Meets ANSI Z87.1, CSA Z94.3 compliant, DIN+ certified





46118



ADF compatible with HLX and **HSL** helmets







46163 Arc Angel

| SERIES NAME | Filter Dimensions | Viewing Area | Shade Range | True Color | Modes | Optical Clarity | Switching Speed | Controls | Weight | No. of Sensors | Warranty |
|----------------|----------------------|--------------|-------------|------------|--------------------------|--------------------|-----------------|----------|--------|-------------------|----------|
| TrueSight II | 4.5" x 5.25" | 3.25" x 4" | 4, 5 to 13 | Yes | Welding, grind, torch | 1/1/1/1 | 1/8,700 sec. | Digital | 24 oz. | 4 | 5 years |





Hard Hat Interchange System

Look for this symbol for helmets compatible with the Hard Hat Interchange System

| PRODUCT NO. | Description | Case Qty. |
|-------------|--|-----------|
| 46159 | HLX Welding Helmet with TrueSight II ADF – Black | 1 |
| 46118 | HLX Welding Helmet with TrueSight II ADF – Stars & Scars | 1 |
| 46163 | HLX Welding Helmet with TrueSight II ADF – Arc Angel | 1 |
| 46158 | TrueSight II ADF Cartridge – 4.5" x 5.25" | 1 |
| 30320 | TrueSight II External Safety Lens, 10 pack | 10 |
| 30321 | TrueSight II Internal Safety Lens, 10 pack | 10 |
| 38426 | Hard Hat Interchange System (HHIS) | 1 |
| 20696 | 370 Speed Dial Headgear System | 1 |
| 32187 | Replacement Washable Sweatband – 2/pack | 24 packs |



30320



30321





Two legendary helmet styles





46131

Insight® ADF Welding Helmet

** BETTER



Jackson Safety's **Insight ADF** provides professional-grade quality at an affordable price. The Insight Series is offered in both HLX (Halo X) and HSL (Shadow) helmet configurations, but also can be easily fitted into both of the Sellstrom WHP and WHB series shells.

ADF WELDING HELMETS — INSIGHT® SERIES

Our Insight series remains our most popular selling ADF welding helmet, but in an ongoing effort for product improvements, and through end-user customer feedback, we have now upgraded the Insight ADF to include a 1/1/1/1 optical rating and True Color technology! This improvement offers far superior welding clarity and ensures significant reductions in eyestrain.

Whether you are a professional welder or a weekend warrior, our Insight ADF welding helmet provides incredible performance at an affordable price.

- Newly updated to highest optical class 1/1/1/1
- Newly updated with True Color
- Digital controls
- Weld and grind modes
- Variety of graphic helmet options
- ADF compatible with HSL, HLX, WHP, and WHM shells
- Meets ANSI Z87.1, CSA Z94.3 compliant



9.3 sq. viewing area!



| SERIES NAME | Filter Dimensions | Viewing Area | Shade Range | True Color | Modes | Optical Clarity | Switching Speed | Controls | Weight | No. of Sensors | Warranty |
|----------------|----------------------|---------------|-------------|------------|--------------------------|--------------------|-----------------|----------|--------|-------------------|----------|
| Insight | 4.5" x 5.25" | 2.36" x 3.94" | 4, 9 to 13 | Yes | Welding, grind, torch | 1/1/1/1 | 1/10,000 sec. | Digital | 24 oz. | 4 | 2 years |

| PRODUCT NO | . Description | | PRODUCT NO. | Description | Case Qty. |
|------------|---|---|-------------|--|-----------|
| 46129 | HSL Welding Helmet with Insight ADF – Black | 1 | 41589 | Insight Safety Lens Kit – 5 external, 2 internal | 10 |
| 46131 | HLX Welding Helmet with Insight ADF – Black | 1 | 41594 | Insight Internal Safety Plate – 10 pack | 10 |
| 46101 | HLX Welding Helmet with Insight ADF – Stars & Scars | 1 | 38426 | Hard Hat Interchange System (HHIS) | 1 |
| 46130 | HLX Welding Helmet with Insight ADF – Arc Angel | 1 | 20696 | 370 Speed Dial Headgear System | 1 |
| 46138 | HLX Welding Helmet with Insight ADF – I^2 | 1 | 32187 | Replacement Washable Sweatband – 2/pack | 24 packs |
| 46128 | Insight ADF Cartridge | 1 | | | |



46101 - Stars & Scars



46130 – Arc Angel



46138 – I²



Features Jackson Safety premium 370 Series Easy Grip-Easy Turn ratcheting mechanism — an industry best!



Hard Hat Interchange System

Look for this symbol for helmets compatible with the Hard Hat Interchange System

OUR MOST POPULAR ADF HELMET SERIES!

ADF WELDING HELMETS — NEXGEN® SERIES



NexGen® ADF Welding Helmet

Jackson Safety's **NexGen ADF** is a tried and true technology that welders have continued to demand. One of Balder's first creations, the NexGen uses a "surface mode" technology that allows for only the surface molecules to rotate when switching from light to dark states. As a result, the helmet has a very smooth transition that is less noticeable and easy on a welder's eyes.

- Uses patented "surface mode" technology
- Digital controls
- Weld and grind modes
- Variety of graphic helmet options
- ADF compatible with HSL, HLX, WHP, and WHM shells
- Meets ANSI Z87.1, CSA Z94.3 compliant











Two legendary helmet styles



Shadow

46148



HLX Halo X

46151

| SERIES NAME | Filter Dimensions | Viewing Area | Shade Range | True Color | Modes | Optical Clarity | Switching Speed | Controls | Weight | No. of Sensors | Warranty |
|----------------|----------------------|--------------|-------------|------------|--------------------------|--------------------|-----------------|----------|--------|-------------------|----------|
| NexGer | 4.5" x 5.25" | 2.35" x 3.8" | 4, 9 to 13 | No | Welding, grind, torch | N/A | 1/15,000 sec. | Digital | 25 oz. | 4 | 2 years |

| PRODUCT NO. | Description | Case Qty. | PRODUCT NO. | Description | Case Qty. |
|-------------|--|-----------|-------------|---|-----------|
| 46148 | HSL Welding Helmet with NexGen ADF – Black | 1 | 15984 | Replacement Batteries CR2450, pair | 10 |
| 46149 | HLX Welding Helmet with NexGen ADF – I^2 | 1 | 15978 | Replacement Battery Door, 10 pack | 10 |
| 46151 | HLX Welding Helmet with NexGen ADF – Heavy Metal | 1 | 22606 | NexGen Lens Kit – 5-pack external, 2-pack internal plates | 1 |
| 46152 | HLX Welding Helmet with NexGen ADF – Arc Angel | 1 | 20696 | 370 Speed Dial Headgear System | 1 |
| 16622 | NexGen ADF Cartridge | 1 | 30590 | NexGen Internal Lens Kit | 10 |
| 15977 | Replacement Retainer – 10 pack | 10 | 32187 | Replacement Washable Sweatband – 2/pack | 24 packs |



Features Jackson Safety premium 370 Series Easy Grip-Easy Turn ratcheting mechanism — an industry best!



Hard Hat Interchange System

Look for this symbol for helmets compatible with the Hard Hat Interchange System

WH40 Advantage Series Variable ADF Welding Helmet

- Features an economical lens for the consumer welder
- Solar-powered
- Features variable shade 9–13, sensitivity and delay adjustments
- Two independent sensors
- Meets ANSI Z87.1 standards and CSA compliant
- $\bullet \quad \text{Not for use with TIG welding} \\$

| PRODUCT NO. | Old Code | Description | Units/Case |
|-------------|----------|--|------------|
| 23282 | 3023293 | WH40 Welding Helmet – Variable ADF – 90 x 110 mm | 4 |
| 29127 | 3023295 | WH40 Lens Kit – 5 Front and 2 Rear Safety Plates | 10 |
| 23442 | 3023376 | WH40 Replacement Headgear | 6 |





23282





29127



sellstrom.

ADF WELDING HELMETS – PREMIUM SERIES









PREMIUM AUTO DARKENING HELMET S26400 Premium Series Auto Darkening Helmet

- Blue lens technology allows more colors of the visible light spectrum to
- come through the lens for natural and more accurate tones

 Includes four arc sensors for amazing clarity, enhanced definition, and
- reduced eye fatigue
- Welding helmet can be used for TIG (>5A), MIG, and stick application
- Wider viewing area is ideal for difficult work angles
- Full digital operation shade, sensitivity, delay, and weld/grind control
- Memory function allows the operator to store settings for future use (three selections)
- Solar and battery operated and includes low battery warning
- Internal controls for maximum protection
- Lightweight design is perfect for extended use
- Ideal for the professional welder and excellent for use in steel fabrication, steel erection, ship building, refinery construction, and much more
- Design allows for use of magnifier plate
- Meets and exceeds ANSI Z87.1 and CAN/CSA-Z94.3 standards
- CE certified

| SERII NAM | | Viewing Area | Shade Range | Power Control | Shade Control | Switching Speed | Sensitivity | Delay | Dark to Light | No. of Sensors |
|--------------|-------------|---------------|-------------|------------------|------------------|-----------------|-------------|------------|---------------|-------------------|
| \$264 | 4.5 x 5.25" | 3.28" x 3.94" | 4, 5 to 13 | Automatic | Internal | .08ms | Adjustable | Adjustable | 0.1s-0.9s | 4 |

| PRODUCT NO. | Description |
|-------------|--------------------------|
| \$27740 | Replacement ADF filter |
| \$27006 | Replacement Headgear |
| S19454 | Replacement Cover Plates |

ADF WELDING HELMETS – ADVANTAGE PLUS SERIES







S26200 Advantage Plus Series Auto Darkening Helmet

- Outstanding protection, performance, comfort, and reliability
- Lightweight design is ideal for extended use
- Easy auto darkening filter and cover plate installation
- $\bullet~$ Welding helmet can be used for TIG (>5A), MIG, and stick application
- Internal controls for maximum protection
- Comfortable push and twist ratcheting headgear adjustment
- Comes complete with grind mode/grinding warning
- Designed for serious hobbyists, full-time welders, fabricators, and general automotive applications
- Design allows for use of magnifier plate
- Meets and exceeds ANSI Z87.1 and CAN/CSA-Z94.3 standards
- CE certified



| | SERIES NAME | Filter Dimensions | Viewing Area | Shade Range | Power Control | Shade Control | Switching Speed | Sensitivity | Delay | Dark to Light | No. of Sensors |
|---|----------------|----------------------|---------------|-------------|------------------|------------------|-----------------|-------------|------------|---------------|-------------------|
| Ī | S26200 | 4.5 x 5.25" | 2.36" x 3.94" | 4, 9 to 13 | Automatic | Internal | .08ms | Adjustable | Adjustable | 0.1s-0.9s | 4 |

| PRODUCT NO. | Description |
|-------------|--------------------------|
| \$27720 | Replacement ADF filter |
| \$27006 | Replacement Headgear |
| \$19452 | Replacement Cover Plates |

sellstrom_®

ADF WELDING HELMETS — ADVANTAGE SERIES







S26100 Advantage Series Auto Darkening Helmet

- Adjustable sensitivity and delay controls
- Lightweight design is perfect for extended use
- Welding helmet can be used for TIG (>5A), MIG, and stick application
- Offers excellent head and neck protection
- Comes complete with grind mode
- Designed for part-time users, hobbyists, and general automotive applications
- Design allows for use of magnifier plate
- Meets and exceeds ANSI Z87.1 and CAN/CSA-Z94.3 standards
- CE certified

| SERIES NAME | Filter Dimensions | Viewing Area | Shade Range | Power Control | Shade Control | Switching Speed | Sensitivity | Delay | Dark to Light | No. of Sensors |
|----------------|----------------------|---------------|-------------|------------------|------------------|-----------------|-------------|-------|----------------|-------------------|
| \$26100 | 3.54" x 4.33" | 1.57" x 3.54" | 4, 9 to 13 | Automatic | External | 0.1ms | L/M/H | S/M/F | 0.1s/0.5s/0.9s | 4 |

| PRODUCT NO. | Description |
|-------------|--------------------------|
| \$27710 | Replacement ADF Filter |
| \$27005 | Replacement Headgear |
| \$19451 | Replacement Cover Plates |



WELDING HELMETS - SPECIALTY

Huntsman Leather Welding Helmet

- Heat resistant and flexible leather design
- Ideal for use in overhead welding applications or when working in tight spaces
- 14531 meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|---|-----------|
| 14531 | 3000506 | 860P Leather Welding Helmet – 2" x 4.25" Lift Front (headgear included) | 4 |
| 26035 | 3000507 | 860P-2 Leather Welding Helmet – 2" x 4.25" Lift Front (headgear not included) | 1 |
| 16073 | 3002759 | Replacement Safety Plate – 2" x 4.25" | 25 |
| 14556 | 3000621 | 117A Replacement Headgear | 6 |
| 24557 | 3024222 | 860P Parts Kit | 1 |







14531

2" x 4.25" format



Headgear teeth automatically disengage during adjustment for speed and ease

All around protection ideal for working in close

14531

proximity with other welders

35

surewerx.com/usa Table of Contents

sellstrom.



S21301





WELDING HELMETS — SPECIALTY



2" x 4.25


format

Leather Hooded Welding Helmet

- Special leather welding hood is ideal for confined space applications and wherever risk of welding sparks are present, not only in the face area, but around the rest of the head, neck, and shoulders
- Extra-long bib for under-chin protection from sparks and spatter
- Extremely durable heat- and flame-resistant gray leather material
- Leather hood is permanently attached to specially designed sure-fit headgear platform using six metal-plated rivets
- Four stainless-steel top ventilation holes with built-in screens for user comfort
- Complete with ratcheting headgear suspension with sweatband included (S27051)
- Comes with standard 2" x 4.25" spring-loaded positive lock lift-front option
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

| PRODUCT NO. | Туре | Bezel Type | Headgear | Filter |
|-------------|----------------|------------|------------|----------------|
| \$21301 | Leather hooded | Lift front | Ratcheting | None |
| S21301-10 | Leather hooded | Lift-front | Ratcheting | Shade 10 plate |

Confined Space Welding Helmet/Hood



2" x 4.25" format

- Originally designed for shipbuilding applications including submarine work, this helmet has since proven effective for other tight/confined space applications
- Patented Sel-Snap lens retention system provides easy loading of filter, cover, and protective plates
- Features our proprietary Super Kool silver coating which keeps the helmet 30% cooler than standard helmets and sheds spatter without burning
- Provides maximum operator comfort and safety
- Complete with Sellstrom's patented "quick release" ratchet headgear suspension with sweatband included (S27001)
- Comes with standard 2" x 4.25" spring-loaded positive lock lift-front option
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

| PRODUCT NO. | Туре | Bezel Type | Headgear | Filter |
|-------------|----------------|------------|------------|--------|
| S29411-08E | Confinrd Space | Lift front | Ratcheting | None |

Welding Helmet Accessories and Replacement Parts

| PRODUCT NO. | Description |
|-------------|--|
| \$21100 | Welder's Leather Bibs with Velcro Tabs (fits inside most welding helmets, and a replacement part for Sellstrom S29411-08E) |
| \$21300 | 4.5" x 5.25" Spring-Loaded Positive Lock Lift-Front Adapter for 290 Series Helmets |
| \$22450 | 450 Sweatband All-Purpose Sweatbands |
| \$27000 | Replacement Sweatbands for Ratcheting Headgear Suspensions |
| \$27001 | Replacement Ratcheting Headgear for Sellstrom's 280, 290, Titan, and Trident Series Welding Helmets (meets ANSI Z87.1 standards) |

Please note: To attach Sellstrom welding helmets to slotted hard hats, use #S61970 universal slotted dielectric hard hat adaptor. Please consult the Face Protection/Face Shields section of our catalog under Face Shield Hard Hat Adaptor Brackets for full details.



WELDING HELMETS — SPECIALTY



Iron Mask Hand-Held Welding Shield

- Sellstrom's USA-made exclusive Iron Mask hand-held welding shield is used for temporary viewing of welding applications
- Removable cap allows for protection when used in right or left hand
- Lightweight and easy to hold in either hand
- Opening fits any sized gloved hand
- $\bullet~$ Comes with standard 2" x 4.25" Shade 10 filter plate and cover plate
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

| 2" x 4.25" | |
|------------|--|
| format | |

| PRODUCT NO. | Description |
|-------------|-------------|
| 505000 40 | |

\$25000-10 Iron Mask Hand-Held Welding Shield



S25000-10

Table of Contents

37

JACKSON®



14979

14982





Look for this symbol for helmets compatible with the Hard Hat Interchange System

WELDING HELMETS – HSL PASSIVE SERIES

HSL-1 Passive Welding Helmet

- Narrow shell design is perfect for work in tight spaces
- Extended front increases throat protection from sparks, slag, and other physical hazards
- Hard hat adaptable using 187-S (15968)
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



2" x 4.25" format

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|---|-----------|
| 14979 | 3002503 | HSL-1 Passive Welding Helmet, Black – 2" x 4.25" | 4 |
| 15121 | 3002579 | HSL-1 Passive Welding Helmet, Black – 2" x 4.25" (bulk) | 10 |
| 16073 | 3002759 | Replacement Safety Plate – 2" x 4.25" | 25 |
| 20696 | 3014866 | 370 Replacement Headgear | 1 |
| 32187 | | Replacement Washable Sweatband – 2/pack | 24 packs |

HSL-2 Passive Welding Helmet — Lift Front


- Narrow shell design is perfect for work in tight spaces
- Extended front increases throat protection from sparks, slag, and other physical hazards
- Hard hat adaptable using 187-S (15968)
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



2" x 4.25" format

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|--|-----------|
| 14982 | 3002507 | HSL-2 Passive Welding Helmet, Black – 2" x 4.25" Lift Front | 4 |
| 15132 | 3002580 | HSL-2 Passive Welding Helmet, Black – 2" x 4.25" Lift Front (Bulk) | 10 |
| 14986 | 3002512 | HSL-2 Passive Welding Helmet, Black With 187 Blades – 2" x 4.25" Lift Front | 4 |
| 14972 | 30102490 | HSL-2 Passive Welding Helmet, Black With 386 Cap Adapter – 2" x 4.25" Lift Front | 4 |
| 16073 | 3002759 | Replacement Safety Plate – 2" x 4.25" | 25 |
| 20696 | 3014866 | 370 Replacement Headgear | 1 |
| 24523 | 3024123 | HSL-2 Parts Kit | 1 |
| 32187 | | Replacement Washable Sweatband – 2/pack | 24 packs |

- Features legendary Jackson HSL Shadow helmet shell
- HSL-1 and HSL-2 helmets come with a 14560 2" x 4.25" Shade 10 filter as standard. See pages 51–53 for Jackson "drop-in" ADF options, and pages 54–56 for the full range of replacement passive filters, cover, and magnifier plates

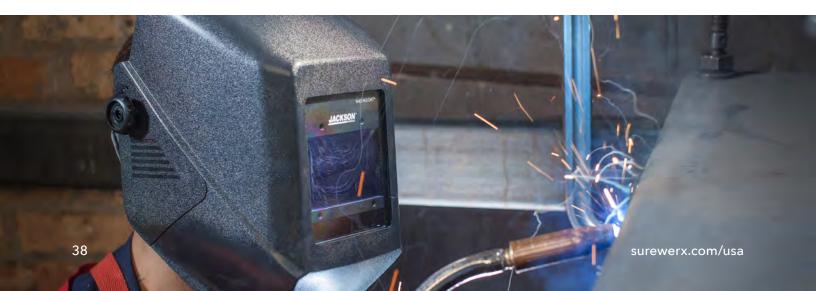

WELDING HELMETS — HSL PASSIVE SERIES

HSL-100 Passive Welding Helmet

- Narrow shell design is perfect for work in tight spaces
- Extended front increases throat protection from sparks, slag, and other physical hazards
- Hard hat adaptable using 187-S (15968)
- ADF adaptable
- NexGen®
- Insight®

16078

20696

24550

• Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards PRODUCT NO. Old Code Description Case Qty. HSL-100 Passive Welding Helmet, Black – 4.5" x 5.25" 14975 3002498 15134 3002581 HSL-100 Passive Welding Helmet, Black - 4.5" x 5.25" (bulk) 10 14976 3002499 HSL-100 Passive Welding Helmet, Blue - 4.5" x 5.25" 14977 3002500 HSL-100 Passive Welding Helmet, Red - 4.5" x 5.25" 4 14978 3002502 HSL-100 Passive Welding Helmet, Black with 187 Blades - 4.5" x 5.25" 4 14973 3002491 HSL-100 Passive Welding Helmet, Black with 386 Cap Adapter – 4.5" x 5.25" 4 16642 3004736 Replacement Light Leak Gasket 12



370 Replacement Headgear

HSL-100 Parts Kit

• Features legendary Jackson HSL Shadow helmet shell

3002760

3014866

3024209

• HSL-100 and HLX-100 helmets come with a 14563 4.5" x 5.25" Shade 10 filter as standard. See pages 54–56 for the full range of replacement passive filters, cover and magnifier plates

Replacement Safety Plate - 4.5" x 5.25"

WELDING HELMETS — HLX PASSIVE SERIES

HLX-100 Passive Welding Helmet — Ultra Lightweight

- Ultra lightweight shell only weighs 6 ounces
- Lightweight shell helps reduce neck tension
- Hydraflex® shell provides the ultimate in flexibility and durability
- Hard hat adaptable using 187-S (15968)
- ADF adaptable
 - NexGen®
 - TrueSight II
 - Insight®
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|---|-----------|
| 20508 | 3013597 | HLX-100 Passive Welding Helmet, Heavy Metal – 4.5" x 5.25" | 2 |
| 24737 | 3024543 | HLX-100 Passive Welding Helmet, Carbon Fiber – 4.5" x 5.25" | 2 |
| 34068 | | HLX-100 Passive Welding Helmet, Black – 4.5" x 5.25" | 2 |
| 16078 | 3002760 | Replacement Safety Plate – 4.5" x 5.25" | 25 |
| 20696 | 3014866 | 370 Replacement Headgear | 1 |
| 24550 | 3024209 | HSL-100 Parts Kit | 1 |
| 15974 | 3002647 | Magnifier (Cheater Lens) Adapter | 12 |
| 32187 | | Replacement Washable Sweatband – 2/pack | 24 packs |

- Features legendary Jackson HLX Halo X helmet shell
- HSL-100 and HLX-100 helmets come with a 14563 4.5" x 5.25" Shade 10 filter as standard. See pages 54-56 for the full range of replacement passive filters, cover and magnifier plates







25

1

12

24 packs





JACKSO

14975









20508







Metal

Carbon Fiber



Hard Hat Interchange System

Look for this symbol for helmets compatible with the Hard Hat Interchange System

JACKSON







14532




14527



WELDING HELMETS — HUNTSMAN SERIES



430P Fiber Shell Welding Helmet



- Made of 10% recycled fiber content
- Not suited for damp environments or overhead welding
- Lift front provides flexibility so user does not have to raise hood
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|---|-----------|
| 14528 | 3000499 | 430P Fiber Shell Welding Helmet – 2" x 4.25" Lift Front | 4 |
| 16073 | 3002759 | Replacement Safety Plate – 2" x 4.25" | 25 |
| 14556 | 3000621 | 117A Replacement Headgear | 6 |
| 24528 | 3024139 | 430P Parts Kit | 1 |

MADE IN

490P Fiber Shell Welding Helmet


MADE IN • Features a lightweight vulcanized fiber shell



490P Parts Kit



- for comfortable, yet cool, heavy-duty welding • Made of 10% recycled fiber content
- Not suited for damp environments or overhead welding
- Quick-slide filter plate holder is ideal for tight work environments
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|--|-----------|
| 14532 | 3000499 | 490P Fiber Shell Welding Helmet – 2" x 4.25" Quick Slide | 4 |
| 16073 | 3002759 | Replacement Safety Plate – 2" x 4.25" | 25 |
| 14556 | 3000621 | 117A Replacement Headgear | 6 |
| 24551 | 3024210 | 490P Parts Kit | 1 |

411P Fiber Shell Welding Helmet





- Features a lightweight vulcanized fiber shell for comfortable, yet cool, heavy-duty welding
- Made of 10% recycled fiber content
- Not suited for damp environments or overhead welding
- Fixed front with aluminum frame filter plate holder
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards


| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|--|-----------|
| 14527 | 3000496 | 411P Fiber Shell Welding Helmet – 2" x 4.25" | 4 |
| 16073 | 3002759 | Replacement Safety Plate – 2" x 4.25" | 25 |
| 14556 | 3000621 | 117A Replacement Headgear | 6 |
| 24530 | 3024141 | 411P Parts Kit | 1 |

451P Fiber Shell Welding Helmet






451P Parts Kit



- Not suited for damp environments or overhead welding
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|--|-----------|
| 14529 | 3000500 | 451P Fiber Shell Welding Helmet – 4.5" x 5.25" | 4 |
| 16073 | 3002759 | Replacement Safety Plate – 2" x 4.25" | 25 |
| 14556 | 3000621 | 117A Replacement Headgear | 6 |
| 24565 | 3024236 | 451P Parts Kit | 1 |




WELDING HELMETS – HUNTSMAN SERIES

HENTSMAN[®] SERIES

951P Passive Welding Helmet

- Lightweight, durable, washable thermoplastic shell
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards





| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|--|-----------|
| 14535 | 3000512 | 951P Passive Welding Helmet – 4.5" x 5.25" | 4 |
| 16078 | 3002760 | Replacement Safety Plate – 4.5" x 5.25" | 25 |
| 14556 | 3000621 | 117A Replacement Headgear | 6 |
| 15974 | 3002647 | Magnifier (Cheater Lens) Adapter | 12 |
| 24548 | 3024206 | 951P Parts Kit | 1 |






14535

930P Passive Welding Helmet

- Lightweight, durable washable thermoplastic shell
- Lift front filter eliminates need to raise welding helmet
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|--|-----------|
| 14534 | 3000511 | 930P Passive Welding Helmet – 2" x 4.25" | 4 |
| 16073 | 3002759 | Replacement Safety Plate – 2" x 4.25" | 25 |
| 14556 | 3000621 | 117A Replacement Headgear | 6 |
| 24528 | 3024139 | 930P Parts Kit | 12 |







14534

Please note: All Huntsman helmets listed on pages 42 and 43 come complete with Jackson Shade 10 passive filters (2" x 4.25" = 14560, 4.5" x 5.25" = 14563). See pages 51-54 for Jackson "drop-in" ADF options, and pages 54-56 for the full range of replacement passive filters, cover, and magnifier plates.

sellstrom.

WELDING HELMETS — 280 SERIES

- Sellstrom's 280 Series welding helmets have been an industry leader for decades
- Made in the USA, the 280 Series is a traditional bucket style welding helmet
- Molded from Super Tuff nylon lighter than fiberglass and extremely durable
- Patented Sel-Snap lens retention system provides easy loading of filter, cover and protective plates
- Available in standard 2" x 4.25" lift and fixed front versions
- Lift front version comes standard with spring loaded positive lock feature
- Also available in 4.5" x 5.25" fixed front version
- Available with our proprietary Super Kool silver coating which keeps the helmet 30% cooler than standard helmets and sheds spatter without burning
- Provides maximum operator comfort and safety
- Available with Sellstrom's patented "quick-release" ratchet headgear suspension with sweatband included, or with universal slot adaptors for slotted hard hats
- Specially designed shape for use with cartridge respirators
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

280 Series — 2" x 4.25" Welding Helmets Only

• 2" x 4.25" welding helmet only (without filter)



| PRODUCT NO. | Color | Bezel Type | Headgear | Helmet Coating |
|-------------|--------|-------------|------------|-------------------|
| \$28301 | Black | Lift front | Ratcheting | None |
| \$28311 | Silver | Lift front | Ratcheting | Super Kool Silver |
| \$28501 | Black | Fixed front | Ratcheting | None |





S28301



S28501

S28311

sellstrom.

WELDING HELMETS — 290 SERIES



290 Series Welding Helmets

- Sellstrom's 290 Series welding helmets have been an industry leader for decades
- Made in the USA our most popular passive welding helmet series
- Molded from Super Tuff nylon lighter than fiberglass and extremely durable
- Extended crown provides greater overhead protection
- Specially designed rigid neck bib provides superior protection from spatter
- Patented Sel-Snap lens retention system provides easy loading of filter, cover, and protective plates
- $\bullet~$ Available in standard 2" x 4.25" and 4.5" x 5.25" lift and fixed front options
- Available in four popular colors
- Available with our proprietary Super Kool silver coating which keeps the helmet 30% cooler than standard helmets and sheds spatter without burning
- Provides maximum operator comfort and safety
- Complete with Sellstrom's patented "quick-release" ratchet headgear suspension with sweatband included (S27001)
- Can also be mounted on slotted hard hats using Sellstrom's dielectric universal slot adaptor (S61970)
- Sold without filter or with a variety of ADF options (your choice)
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



S29301


290 Series — 2" x 4.25" Welding Helmets Only

• 2" x 4.25" welding helmet only (without filter)

| PRODUCT NO. | Color | Bezel Type | Retention System | Helmet Coating |
|-------------|--------|------------|------------------|-----------------------|
| \$29301 | Black | Lift front | Sel-Snap | None |
| \$29311 | Silver | Lift front | Sel-Snap | Super Kool Silver |
| \$29341 | Blue | Lift front | Sel-Snap | None |
| S29371 | Red | Lift front | Sel-Snap | None |



• 4.5" x 5.25" welding helmet only (without filter)





S29901







187-S Mounting Blades

- Securely attaches a welding helmet to safety cap
- Positive locking device keeps the helmet in any position
- Quick detach brackets

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|--------------------|-----------|
| 15968 | 3002634 | 187-S Mounting Kit | 12 |

WELDING HELMET/HARD HAT MOUNTING SYSTEMS

| 187-S Can Be Used With | SC-6 | Sentry III® | Charger ® |
|---------------------------|------|-------------|------------------|
| HLX Series | • | • | • |
| HSL Series Shadow | • | • | • |
| Nitro® | • | • | • |

14939 14961

87 Mounting Blades

- Attaches H, HSL, and Nitro Series welding helmets safely and securely to a hard hat
- Must use with metal 86-M (#14961) quick detach pins (sold separately)
- Fits Jackson SC-6 hard hat series




15973

386 Cap Adapter

• Lets you attach any H Series fiberglass or HSL welding helmet safely and securely to a hard hat

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|----------------------|-----------|
| 15973 | 3002645 | 386 Capmount Adapter | 12 |





Compatibility Chart

| SHELL | Halo X | HSL-100 | HSL-1 | HSL-2 | 951P | 990P | 930P | 860P | 430P | 490P | 411P | 451P | WH40 | Nitro® | NexGen® |
|-------------|-----------------------------|----------------------------|-----------------------------|-----------------------------|------|------|------|------|------|------|------|------|------|-----------------------------|-----------------------------|
| Cap Adapter | 187-S | 187-S | 187-S | 187-S | | | | | | | | | | 187-S | |
| 1 | 386 | 386 | 386 | 386 | | | | | | | | | | 386 | |
| Headgear | 370 SPEED DIAL 20696 | 370 SPEED DIAL 20696 | 370 SPEED DIAL 20696 | 370 SPEED DIAL 20696 | 117A | WH40 | 370 SPEED DIAL 20696 | 370 SPEED DIAL 20696 |
| INTERCHANGE | • | • | • | • | | | | | | | | | | | • |

EXCLUSIVE!

Hard Hat Interchange System

The All-In-One Safety Solution. Injuries can happen in a split second. Now it's easy to stay protected with the Jackson Safety® Hard Hat Interchange System. It lets you add, remove, or switch between your face shield or welding helmet, without removing your head protection.

In accordance with ANSI Z87.1, the system was designed to protect against multiple combinations of hazards. Remain safe, productive, and compliant with the Hard Hat Interchange System. It's worker preferred and safety manager enforced.

- Quickly switch between face shields and welding helmets without removing hard hats
- Meets ANSI standards when PPE products are used separately or combined
- Hear the audible click Know your PPE is assembled correctly without the need for visual inspection
- One-button action provides quick release
- Vertical lock-in eliminates the annoyance of helmet creep
- HHIS headgear system comes fully assembled and ready to use
- Made from lightweight polypropylene
- Dielectric Keeps your hard hat Class E rated!

| | CODE | Description | Case Qty. |
|---------------------|-------|---|--------------|
| | 39477 | HHIS Master Kit contains all components necessary to mount welding helmets and face shields to your hard hat | 6 |
| | 38423 | Replacement HHIS kits for 14225/14235/14238 QUAD 500™ | 6 |
| | 38424 | Replacement HHIS kits for 14202/14203 MAXVIEW™ and 14260/14262 F4XP | 6 |
| 38 | 38425 | HHIS Face Shield Kit contains all components necessary to mount face shields to your hard hat | 6 |
| Helmet not included | 38426 | HHIS Welding Helmet Kit contains all components necessary to mount welding helmets to your hard hat | 6 |
| 20 | 39476 | Replacement mounting brackets for SC-6 series hard hats | 6 |

Look for the Hard Hat Interchange System (HHIS) on these new Jackson products:



MAXVIEW™



14202, 14203

Quad 500™



14225, 14235, 14238

JACKSON®



It's as Easy as 1, 2, 3!



Attach HHIS hard hat mounting bracket (with exclusive quick release button) to cap style slotted hard hat.



Attach HHIS hard hat mounting blades to any Jackson face shield or welding helmet product.



Pushing the HHIS quick release button allows fast and easy attachment/ removal of face protection without ever removing your hard hat!



HHIS Mounting Brackets

HHIS Mounting Blades



AUTO DARKENING FILTERS — 2" x 4.25" REPLACEMENT (DROP-INS)

Replacement or "drop-in" ADFs are designed to fit most 2" x 4.25" welding helmets, including Jackson's popular HSL-1, HSL-2, and Huntsman Series, and the Sellstrom 280 and 290 Series. They are an economical replacement ADF filter, or an ideal method to upgrade passive welding helmets into an ADF format. Jackson introduces two new models, the exclusive Smartweld*, which incorporates a convenient USB-C rechargeable system and variable shade ranges from 4/9-13, and the more economical Solera* II offering a fixed 3/11 shade range. Both offer True Color technology and are TIG rated >5 amps. The best in the business – now from Jackson!


Smartweld Variable Shade ADF

- The Smartweld is a newly innovative product that can be recharged!
- ADF is compatible with a USB-C charger
- Charge time four hours
- Charge lasts approximately one month of usage (160 hours)
- TIG amp rated >5A
- Comes in attractive, ready-to-use color POP counter display 10 pieces/display
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards. CE certified
- A Jackson Safety exclusive!

| PRODUCT NO. | Description | Case Qty. | |
|-------------|---|-----------|--|
| 46411 | Smartweld ADF, USB-C Rechargeable, Shade 4/9–13, 2" x 4.25" | 10 | |
| 46911 | Smartweld Internal Safety Plate, 2" x 4.25" | 100 | |



| PRODUCT NO. | Filter Dimensions | Viewing Area | Shade Range | True Color | Modes | Optical Clarity | Switching Speed | Controls | Weight | No. of Sensors | TIG Rating | Warranty |
|----------------|----------------------|---------------|-------------|------------|---------|--------------------|--------------------|----------|---------|-------------------|---------------|----------|
| 46411 | 2" x 4.25" | 1.42" x 3.62" | 4, 9 to 13 | Yes | Welding | 1/1/1/2 | 1/1,667 sec. | Analog | 1.4 oz. | 2 | >5A | 1 year |

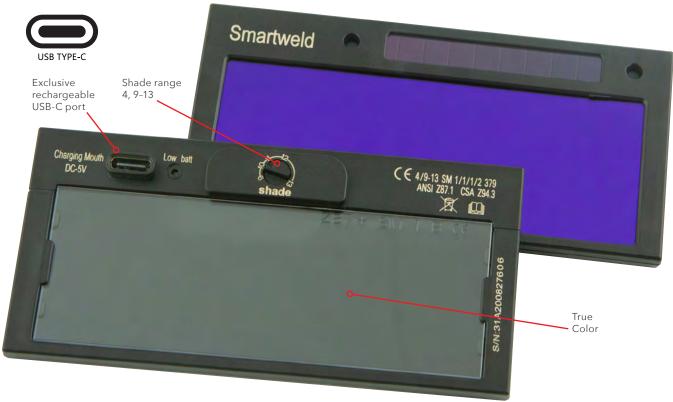

46411



AUTO DARKENING FILTERS – 2" x 4.25" REPLACEMENT (DROP-INS)

Solera II Shade 10 Welding ADF



- The Solera II improves upon the highly demanded Solera product
- The ADF is a universal fit for most 2" x 4.25" welding helmets
- Compatible with HSL-1, HSL-2, and Huntsman series and many other brands of welding helmets
- Sleek, ultralight design at only 1.3 oz. will ensure maximum comfort
- Solar powered
- Comes in attractive, ready-to-use color POP counter display 10 pieces/display
- Meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards. CE certified

| PRODUCT NO. | Description | Case Qty. |
|-------------|---|-----------|
| 46410 | Solera II ADF Shade 3/10, 2.5" x 4.25" | 10 |
| 46910 | Solera II Internal Safety Plate, 2" x 4.25" | 100 |



JACKSON®

46410

| PRODUCT NO. | Filter Dimensions | Viewing Area | Shade Range | True Color | Modes | Optical Clarity | Switching Speed | Controls | Weight | No. of Sensors | TIG Rating | Warranty |
|----------------|----------------------|---------------|-------------|------------|---------|--------------------|--------------------|----------|---------|-------------------|---------------|----------|
| 46410 | 2" x 4.25" | 1.42" x 3.62" | 3, 10 | Yes | Welding | 1/1/1/2 | 1/1,667 sec. | N/A | 1.3 oz. | 2 | >5A | 1 year |




46410



sellstrom_®





S16709

WELDING FILTER PLATES — PASSIVE

- Traditional welding filter plates are widely used in the industry
- Unlike auto-darkening filters, welding filter plates are a passive fixed shade system —
 you choose the right filter shade for your application as mandated by ANSI Z49.1-2005 standards
- \bullet Available in two common sizes: 2"H x 4.25"W and 4.5"H x 5.25"W
- Available in a wide variety of materials and shades for every application
- These filters fit several Jackson and Sellstrom models, as well as most other welding helmets in the market

Polycarbonate Passive Filter Plates

- Polycarbonate passive filter plates offer outstanding impact strength and optical clarity
- The most popular passive filter plate in the market
- Meet ANSI Z87.1 high impact standards

| PRODUCT NO. | Plate Size | Shade | Туре | Case Qty. |
|-------------|-------------|-------|---------------|-----------|
| \$16604 | 2" x 4.25" | 4 IR | Polycarbonate | 50 |
| \$16605 | 2" x 4.25" | 5 IR | Polycarbonate | 50 |
| \$16606 | 2" x 4.25" | 6 IR | Polycarbonate | 50 |
| \$16609 | 2" x 4.25" | 9 IR | Polycarbonate | 50 |
| \$16610 | 2" x 4.25" | 10 IR | Polycarbonate | 50 |
| \$16611 | 2" x 4.25" | 11 IR | Polycarbonate | 50 |
| \$16612 | 2" x 4.25" | 12 IR | Polycarbonate | 50 |
| | | | | |
| \$16709 | 4.5"x 5.25" | 9 IR | Polycarbonate | 15 |
| \$16710 | 4.5"x 5.25" | 10 IR | Polycarbonate | 15 |
| \$16711 | 4.5"x 5.25" | 11 IR | Polycarbonate | 15 |
| \$16712 | 4.5"x 5.25" | 12 IR | Polycarbonate | 15 |

JACKSON®



14571



14562

Polycarbonate Passive Filter Plates

• Meets ANSI Z87.1+ high impact standards

| PRODUCT NO. | Old Code | Description | Plate Size | Shade | Туре | Case Qty. |
|-------------|----------|------------------|--------------|-------|---------------|-----------|
| 14571 | 3000691 | 427 Filter Lens | 2" x 4.25" | 5 IR | Polycarbonate | 25 |
| 14559 | 3000644 | 427 Filter Lens | 2" x 4.25" | 9 IR | Polycarbonate | 25 |
| 14560 | 3000645 | 427 Filter Lens | 2" x 4.25" | 10 IR | Polycarbonate | 25 |
| 14570 | 3000690 | 427 Filter Lens | 2" x 4.25" | 11 IR | Polycarbonate | 25 |
| 14561 | 3000646 | 427 Filter Lens | 2" x 4.25" | 12 IR | Polycarbonate | 25 |
| | | | | | | |
| 14562 | 3000649 | 1127 Filter Lens | 4.5" x 5.25" | 9 IR | Polycarbonate | 25 |
| 14563 | 3000650 | 1127 Filter Lens | 4.5" x 5.25" | 10 IR | Polycarbonate | 25 |
| 14564 | 3000651 | 1127 Filter Lens | 4.5" x 5.25" | 11 IR | Polycarbonate | 25 |
| 14566 | 3000652 | 1127 Filter Lens | 4.5" x 5.25" | 12 IR | Polycarbonate | 25 |

COVER PLATES

- Cover plates are positioned in front of passive and ADF filters providing an economical "shield" that protects the more expensive filters plates from pitting and scratching
- As the cover plate becomes damaged, you simply replace it with a new plate

Cover Plates — CR-39 Long Life

- CR-39 clear cover plates provide the best protection from pitting and scratching
- Our most popular cover plates
- Made of durable, heat resistant materials containing CR-39 Monomer
- Combines the optics of glass with the added durability of thermostat material
- Superior resistance to scratches, heat and chemicals
- Meets ANSI Z87.1 Basic Impact standards and Federal Specs GGG-H-211D (not to be used as an impact plate)
- Refractive Index Value 1.498
- Abbe Value 59.3
- Density 1.31g/cm³
- Plate thickness .056"
- Individually bagged

| PRODUCT NO. | Plate Size | Shade | Туре | Case Qty. |
|-------------|--------------|-------|-------|-----------|
| \$19002 | 2" x 4.25" | Clear | CR-39 | 100/box |
| \$19004 | 4.5" x 5.25" | Clear | CR-39 | 50/box |

Cover Plates & Components

| PRODUCT NO. | Old Code | Description | Size | Material | Case Qty. |
|-------------|----------|---|--------------|---------------|-------------|
| 16073 | 3002759 | Replacement Safety Plates | 2" x 4.25" | Polycarbonate | 25 per Pack |
| 16078 | 3002760 | Replacement Safety Plates | 4.5" x 5.25" | Polycarbonate | 25 per Pack |
| 16642 | 3004736 | Light Seal Gasket | 4.5" x 5.25" | Polycarbonate | 12 per Pack |
| 24734 | 3024540 | Light Seal Gasket Inserted on Safety Plate | 4.5" x 5.25" | Polycarbonate | 10 per Pack |








S19004







16078



24734

Exclusive

sellstrom_®



MAGNIFIER PLATES

- Magnifier plates are positioned behind either the passive or ADF welding filter
- Magnifier plates offer the feature of magnifying your vision, much like reading glasses for improved vision where necessary
- Made of high quality polycarbonate material
- Provide great visual clarity and scratch resistance characteristics
- Available in a wide range of dioptic ratings from 1.00–2.50

| PRODUCT. NO. | Plate Size | Shade | Dioptic Rating | Туре | Case Qty. |
|--------------|------------|-------|----------------|------|----------------|
| \$18100 | 2" x 4.25" | Clear | 1.00 | PC | 1 ea. /200/box |
| \$18125 | 2" x 4.25" | Clear | 1.25 | PC | 1 ea. /200/box |
| \$18150 | 2" x 4.25" | Clear | 1.50 | PC | 1 ea. /200/box |
| \$18175 | 2" x 4.25" | Clear | 1.75 | PC | 1 ea. /200/box |
| \$18200 | 2" x 4.25" | Clear | 2.00 | PC | 1 ea. /200/box |
| \$18225 | 2" x 4.25" | Clear | 2.25 | PC | 1 ea. /200/box |
| \$18250 | 2" x 4.25" | Clear | 2.50 | PC | 1 ea. /200/box |

JACKSON®



15974



15975

Shade range

• Meets ANSI Z87.1+ high impact standards

Mag Plates


| PRODUCT NO. | Old Code | Plate Size | Shade | Dioptic Rating | Case Qty. |
|-------------|----------|------------|-------|----------------|-----------|
| 16058 | 3002743 | 2" x 4.25" | Clear | 1.50 | 6 |
| 16063 | 3002745 | 2" x 4.25" | Clear | 2.00 | 6 |
| 16068 | 3002747 | 2" x 4.25" | Clear | 2.50 | 6 |

Adapter Kits

| PRODUCT NO. | Old Code | Description |
|-------------|----------|-------------------------------|
| 15974 | 3002647 | 4.5" x 5.25" Mag Lens Holder |
| 15975 | 3002656 | Executive ADF Mag Lens Holder |

DID YOU KNOW?

Jackson carries two series of drop-in ADF filters for easy conversion of a passive welding helmet!







46410 Jackson Solera II Fixed Shade 10 ADF

For more details refer to pages 51-53



JACKSON® SAFETY

Long-levered, finger grip contoured handle for easy jaw opening conductivity

Serrations cut through rust and contamination for superior connection

WELDING CONNECTORS, CLAMPS, AND ELECTRODES

GROUND CLAMPS

Jackson Safety* ground clamps feature large contact areas, high-clamping pressure and long-levered handles for easy jaw opening. Clamps have fully insulated pivots and springs. The cable jacket is held securely inside the conductor body with a cable bar for improved holding ability and longer cable life.

Ground Clamps

| PRODUCT NO. | Old Code | Description | Jaw Opening | Cable Connection Cap. | Weight | Case Qty. |
|-------------|----------|-------------|-------------|-----------------------|--------|-----------|
| 14730 | 3001834 | GC-2 | 1.25" | 4 through 1/0 | 16 oz. | 24 |
| 14731 | 3001835 | GC-3 | 1.625" | 1/0 and 2/0 | 23 oz. | 24 |
| 14732 | 3001836 | GC-5 | 2" | 3/0 and 4/0 | 34 oz. | 12 |

Cable Lugs and Terminal Covers

| PRODUCT NO. | Old Code | Description | Standard Pack |
|-------------|----------|------------------|---------------|
| 14748 | 3001855 | Cable Lug QLB-45 | Sold in pairs |
| 14746 | 3001853 | Terminal Covers | Sold in pairs |



WELDING CONNECTORS, CLAMPS, AND ELECTRODES

Electrode Holders

| PRODUCT NO. | Old Code | Description | Body Alloy | Electrode Capacity | Cable Connection Capacity | Weight | Duty Cycle Rating | Case Qty. |
|----------------|----------|-------------|-------------------|-----------------------|---------------------------------|--------|-------------------------|-----------|
| 14679 | 3001793 | JH-1 | Copper Alloy | 3/16" | 4 through 1/0 | 12 oz. | Medium Duty | 24 |
| 14683 | 3001797 | JH-2 | Aluminum Alloy | 5/32" | 4 through 1/0 | 10 oz. | Light Duty | 24 |
| 14680 | 3001794 | AW-C | Copper Alloy | 1/4" | 4 through 2/0 | 19 oz. | Medium Duty | 24 |
| 14682 | 3001796 | A-W | Aluminum Alloy | 1/4" | 3 through 2/0 | 14 oz. | Medium Duty | 24 |
| 14681 | 3001795 | A3-S | Copper Alloy | 3/8" | 2/0 through 4/0 | 30 oz. | Heavy Duty | 12 |
| 14684 | 3001798 | J-4 | - | 1/4" | 2 through 1/0 | 16 oz. | Heavy Duty | 12 |

Duty Cycle Rating is the maximum percentage of arc time (out of any 10-minute period) that a holder should be expected to perform comfortably.





CABLE CONNECTORS

Jackson Safety® offers a popular range of fully insulated cable connectors with tapered ends covering the cable jacket and locking out moisture, oil and dirt.

Cable Connectors

| PRODUCT NO. | Old Code | Description | Cable Connection Type | Connection Half Connection Type | Cable Connection Capacity | Standard Pack | Case Qty. |
|-------------|----------|----------------------|-----------------------|------------------------------------|------------------------------|----------------------|--------------|
| 14742 | 3001849 | Uni-Trik® UB-3-BP | Double Dome-Nose | Camlock | 1/0 through 3/0 | 1 each Male & Female | 6 |
| 14745 | 3001852 | Uni-Trik® UB-4-BP | Double Dome-Nose | Camlock | 3/0 through 4/0 | 1 each Male & Female | 6 |
| 14733 | 3001840 | Quick-Trik® QNB-2-BP | Single Dome-Nose | Camlock & Locking Bar | 1/0 and 2/0 | 1 each Male & Female | 6 |
| 14734 | 3001841 | Quick-Trik® QNB-4-BP | Single Dome-Nose | Camlock & Locking Bar | 3/0 and 4/0 | 1 each Male & Female | 6 |

Uni-Trik®



Quick-Trik®





PIPE MARKERS

LEVELS AND FLANGE ALIGNING TOOLS

WRAP-A-ROUND

PIPE AND TOOL MARKING ACCESSORIES

Curv-O-Mark layout tools and systems have earned a reputation for quality and consistency across a wide range of industries. Easy to use and made for an extended working life, these are tools to help bring precision to any layout task.

PIPE MARKERS




Standard Markers

The Curv-O-Mark marker consists of an X-frame, calibrated protractor, and a triple-jointed marking arm adjustable to the line to be scribed. A soapstone crayon is required for each radius marker (not supplied).

| U.S. PROD. NO. | EU Prod. No. | Description | Pipe Diameter | Case Qty. |
|----------------|--------------|-------------------------------------|----------------------|-----------|
| 14771 | J1874 | #1 Curv-O-Mark Marker – Standard | 1.5" to 18" diameter | 1 |
| 14772 | J1875 | #2 Curv-O-Mark Marker Combo Adaptor | Use with #1 Marker | 1 |
| 14773 | J1877 | # 4 Jumbo Curv-O-Mark Marker | 8" to 48" diameter | 1 |
| 14774 | J1878 | #5 Jumbo Marker Combo Adaptor | Use with #4 Marker | 1 |





Radius Markers

Radius markers have sturdy friction joints to maintain rigidity and accuracy, and are made from lightweight, rustproof aluminum for extended life. A soapstone crayon is required for each radius marker.

| U.S. PROD. NO. | EU Prod. No. | Description | Pipe Diameter | Case Qty. |
|----------------|--------------|--------------------------|---------------------|-----------|
| 14780 | J1884 | Radius Marker – Mini | Up to 8" in radius | 1 |
| 14781 | J1885 | Radius Marker – Small | Up to 20" in radius | 1 |
| 14782 | J1886 | Radius Marker – Standard | Up to 24" in radius | 1 |
| 14783 | J1887 | Radius Marker – Jumbo | Up to 40" in radius | 1 |

Centering Heads

Curv-O-Mark centering heads aid in the settings of centerlines, establishing angles and marks for butt-ins, locating points inside pipes and tanks, laying out keyways, and measuring declivity.

| U.S. PROD. NO. | EU Prod. No. | Description | Pipe Diameter | Case Qty. |
|----------------|--------------|------------------------------|---------------------|-----------|
| 14775 | J1879 | #6 Centering Head – Standard | 1/2" to 4" diameter | 1 |
| 14776 | J1880 | #7 Centering Head – Jumbo | 1"+ diameter | 1 |

Protractor

This 90° protractor has a matching locking lever to set and hold the tool at the desired angle. It is equipped with a $5/8" \times 10"$ tapered arm to complete finding of angles or desired bends, or to determine any portions of elbows. The tool is mounted in a 3/4"-wide frame with a $3/8" \times 6"$ cast-in rod. It comes with a 25-lb. pull magnetic base for holding the protractor frame in position. The unit can be used manually or with a magnetic base.

| U.S. PROD. NO. | EU Prod. No. | Description | Pipe Diameter | Case Qty. |
|----------------|--------------|------------------------------|---------------|-----------|
| 14778 | J1882 | #9 Fitter Welding Protractor | All | 1 |













Multi Trammel Heads

PIPE MARKERS

Using standard half-inch pipe as a trammel bar, heads feature radius set points cast in alignment with marking pointers for easy setting. Equipped with 1/4" screws and squared on the back side of perpendicular alignment. The stationary head holds a 1/4" case hardened center point. Movable head has a 1/8" steel scribe hardened. Marks from 1.5" circle to any diameter needed, depending on length of pipe used as a trammel bar. Allen wrench, soapstone, scribe, and pointer also included.

| U.S. PROD. NO. | EU Prod. No. | Description | Pipe Diameter | Case Qty. |
|----------------|--------------|-------------------------|---------------|-----------|
| 14785 | J1890 | #19 Multi Trammel Heads | All | 1 |

LEVELS AND FLANGE ALIGNING TOOLS





A lightweight, easy to use tool for determining angles. Unit is ideal for the pipe fitter, welder, jig builder, or anyone who has to determine angles or do setup work. Includes two cast-in 25-lb. pull magnets that hold securely to any steel surface. Unit has a 360° adjustable DSL with two 90° quadrants graduated in 2.5° increments. Cast-in tables are used to convert degree-of-angle to rise-in-inches-per-foot or millimeters-per-meter. A groove on the bottom edge permits use on a small pipe.

| U.S. PROD. NO. | | EU Prod. No. | Description | Case Qty. | |
|----------------|-------|--------------|------------------|-----------|--|
| | 14777 | J1881 | #8 Pro Mag Level | 1 | |



14777



Dial Angle Flange Level

A versatile tool that can be used as a dial degree utility level or, with attachments, for two holding flange alignment.

| U.S. PROD. NO. EU Prod. No. | | Description | Case Qty. |
|-----------------------------|-------|---|-----------|
| 14786 | J1891 | #20 Dual-Angle Flange Level – Non-magnetic; can be used on PVC Pipe | 1 |



Universal Level

The universal level is a multi-purpose tool that features a 360° adjustable protractor dial that ensures accurate leveling and permits setting a predetermined pitch of a string of pipe, setting the angle of laterals to a precise degree, trueing vertical runs and two-holding flanges. For structural steel workers, the powerful holding magnets provide an extra hand. Electricians will find the level useful in laying out and lining up heavy conduit.

| U.S. PROD. NO. | EU Prod. No. | Description | Case Qty. |
|----------------|--------------|---------------------|-----------|
| 14796 | J1904 | #33 Universal Level | 1 |



Fast, accurate pipe construction is possible with this self-determining flange aligning tool. The aligner inserts easily into pipe, centers snugly against the inside pipe diameter and automatically aligns with the pipe axis.

| U.S. PROD. NO. | EU Prod. No. | Description | Case Qty. |
|----------------|--------------|-------------------------|-----------|
| 14779 | JJ1883 | #10 Pipe Flange Aligner | 1 |



LEVELS AND FLANGE ALIGNING TOOLS



Universal Level

The DSL is an adjustable bubble protractor used with a number of Curv-O-Mark tools. The protractor covers 180° through two 90° quadrants, reading in 2.5° increments. The bubble is cast in the aluminum dial.

| U.S. PROD. NO. | EU Prod. No. | Description | Pipe Diameter | Case Qty. |
|----------------|--------------|----------------------------------|------------------------------|-----------|
| 14797 | J1905 | Curv-O-Mark Dial-Set-Level (DSL) | Adjustable Bubble Protractor | 1 |



JACKSO

14797

Flange Aligner Base

Removes the difficulty of flange aligning and squaring. Tool holds a square in the needed position without tying up one's hands. Base is notched at either end for ease in aligning on the center line of the pipe. Two 25-lb. pull, cast-in magnets for holding either a flat horizontal or vertical position. Base accepts either leg of a standard or combination aluminum square and works on pipe diameters from 1+", requiring only the extension of the legs of the square being used to accommodate larger diameters.

| U.S. PROD. NO. | EU Prod. No. | Description | Case Qty. |
|----------------|--------------|-------------------------|-----------|
| 14795 | J1903 | #32 Flange Aligner Base | 1 |



14795

Centering Pin

A hardened steel pin for use with the standard centering head. Suitable for marking, but should not be used as a center punch.

| U.S. PROD. NO. | EU Prod. No. | Description | Case Qty. |
|----------------|--------------|---------------|-----------|
| 14798 | J1906 | Centering Pin | 1 |



WRAP-A-ROUND



Inexpensive tools for marking straight lines around pipe; made from flexible gasket material, providing resistance to both heat and cold. All Wrap-A-Rounds are available in two colors; these designate material type and service temperature. GG (gray) material is used for high temperature applications (up to 550°F) and B (black) material is used for temperatures up to 350°F. Both material types are asbestos free.

| U.S. PROD. NO. | EU Prod. No. | Description | Color | Size | Pipe Diameter | Case Qty. |
|----------------|--------------|-------------------------|-------|------------|---------------|-----------|
| 14752 | J1858 | Wrap-A-Round – Medium | Black | 3.88" x 4' | 3" to 6" | 1 |
| 14753 | J1859 | Wrap-A-Round – Large | Black | 3.88" x 6' | 3" to 10" | 1 |
| 14754 | J1860 | Wrap-A-Round – X-Large | Black | 5" x 7' | 4" to 12" | 1 |
| 14756 | J1861 | Wrap-A-Round – XX-Large | Black | 5" x 9' | 6" to 16" | 1 |
| 14763 | J1867 | Wrap-A-Round – Medium | Gray | 3.88" x 4' | 3" to 6" | 1 |
| 14764 | J1868 | Wrap-A-Round – Large | Gray | 3.88" x 6' | 3" to 10" | 1 |
| 14766 | J1869 | Wrap-A-Round – X-Large | Gray | 5" x 7' | 4" to 12" | 1 |
| 14767 | J1870 | Wrap-A-Round – XX Large | Gray | 5" x 9' | 6" to 16" | 1 |









ADVANTAGES OF WILSON® TRANSPARENT WELDING CURTAINS



Protects bystanders from UV and blue light radiation



Creates a sound barrier to minimize noise discomfort and the risk of hearing impairment for nearby workers



Creates a designated space specifically for welding operations while still maintaining visibility



Injury prevention

Prevents sparks and spatter from injuring bystanders while self-extinguishing properties keep the curtain from burning



Curtains come grommeted, and when used with frames, are easily hung and can be rearranged

Easy installation




Creates a containment barrier that allows for more efficient fume extraction

Reduced fumes and vapors

JACKSON WILSON









Custom Size Curtains Available

TRANSPARENT WELDING CURTAINS

- Built with grommets for easy hanging
- Durable material resists tearing
- Flame, mildew, and water resistant
- All curtains meet or exceed California Fire Marshall standards or NFPA 701 requirements for flame resistance
- Available in orange, green, and gold 14-mil transparent material

Why Choose Orange?

- Puts light back into the welding area to help increase worker productivity
- Can be used around MIG, TIG, arc, and plasma operations
- Excellent for use in assembly areas

| PRODUCT NO. | Width | Length | Weight | Thickness | Color | Amp Usage |
|-------------|-----------|-----------|--------|-----------|--------|-------------|
| 36278 | 6' (1.8m) | 10' (3m) | 13 oz. | .014" | Orange | Medium-High |
| 36292 | 6' (1.8m) | 6' (1.8m) | 13 oz. | .014" | Orange | Medium-High |
| 36307 | 6' (1.8m) | 8' (2.4m) | 13 oz. | .014" | Orange | Medium-High |
| 37606 | 6' (1.8m) | 4' (1.2m) | 13 oz. | .014" | Orange | Medium-High |

Why Choose Green?

- Decreases total light from the welding arc
- Ideal when visibility and light reduction are necessary

| PRODUCT NO. | Width | Length | Weight | Thickness | Color | Amp Usage |
|-------------|-----------|-----------|--------|-----------|-------|-------------|
| 36283 | 6' (1.8m) | 10'(3m) | 13 oz. | .014" | Green | Medium-High |
| 36299 | 6' (1.8m) | 6' (1.8m) | 13 oz. | .014" | Green | Medium-High |
| 36315 | 6' (1.8m) | 8' (2.4m) | 13 oz. | .014" | Green | Medium-High |
| 37700 | 6' (1.8m) | 4' (1.2m) | 13 oz. | .014" | Green | Medium-High |

Why Choose Gold?

- Ideal when supervision is required
- Allows better two-way viewing between welder and bystander

| PRODUCT NO. | Width | Length | Weight | Thickness | Color | Amp Usage |
|-------------|-----------|-----------|--------|-----------|-------|------------|
| 36281 | 6' (1.8m) | 10'(3m) | 13 oz. | .014" | Gold | Low-Medium |
| 36296 | 6' (1.8m) | 6' (2.4m) | 13 oz. | .014" | Gold | Low-Medium |
| 36312 | 6' (1.8m) | 8' (2.4m) | 13 oz. | .014" | Gold | Low-Medium |
| 37607 | 6' (1.8m) | 4' (1.2m) | 13 oz. | .014" | Gold | Low-Medium |

Why Choose Canvas?

- Made to withstand 500°F
- Excellent choice when zero visibility is required

| PRODUCT NO. | Width | Length | Weight | Thickness | Color | Amp Usage |
|-------------|-----------|------------|--------|-----------|-------|-----------|
| 36277 | 6' (1.8m) | 10' (3.0m) | 12 oz | 0.14" | Green | High |
| 36289 | 6' (1.8m) | 6' (1.8m) | 13 oz | 0.14" | Green | High |
| 36304 | 6' (1.8m) | 8' (2.4m) | 13 oz | 0.14" | Green | High |
| 37454 | 6' (1.8m) | 4' (1.2m) | 13 oz | 0.14" | Green | High |
| | | | | | | |

| PRODUCT NO. | Description | Case Qty. |
|-------------|---|-----------|
| 36687 | Accessory hooks for hanging curtains to pipe frame configurations | 10 |



JACKSON* **Wilson***

WELDING SAFETY SCREENS



Per OSHA
recommendations,
allow 1' clearance
at the floor for
all curtain/frame
combinations
for ventilation

Stur-D-Screen Frames and Recommended Curtains

| FRAME ONLY | Frame Size | Orange | Gold | Green |
|------------|-------------------------------|-------------|-------------|-------------|
| 36335 | 6' x 4' Single Panel | 37606 | 37607 | 37700 |
| 36336 | 6' x 6' Single Panel | 36292 | 36296 | 36299 |
| 36338 | 6' x 8' Single Panel | 36307 | 36312 | 36315 |
| 37198 | Adjustable 6' x 6' to 6' x 8' | 36292/36307 | 36296/36312 | 36299/36315 |
| 36333 | 6' x 10' Single Panel | 36278 | 36281 | 36283 |

All Stur-D-Screens include steel frame, brackets, hardware and lacing ties

HOW DO I CHOOSE THE RIGHT WELDING BLANKET FOR THE JOB?

With so many different materials, sizes and functions, it's very difficult to decide what type of welding blanket you might need for the job. When you are unsure of the right style for you, it's good to start with some basic questions:

What constant, intermittent, and melting temperature are you working with?

- Constant Temperature The maximum temperature a blanket can withstand for the entire duration of the application. Sometimes this is referred to as "service temperature" or "working temperature."
- Intermittent Temperature The temperature the fabric can withstand for short durations without damage.
- Melting Temperature The temperature where the fabric is physically damaged due to prolonged exposure.

What should I know about different fiberglass coatings?

There are many different coatings available each with its own specific properties. Listed below are some of the most common styles:

Acrylic

- Enhanced abrasion and tear resistance
- · Soft to the touch

Silicone

- Resistant to oil and chemicals
- · Non-slip surface
- Very flexible

Canvas

- Made to withstand 500°F
- Excellent choice when zero visibility is required

Carbon Fiber Felt

- Easy to cut and can conform to complex curves
- Lightweight and soft material

Vermiculite

- Advanced abrasion resistance
- Can be used without gloves

Which welding blankets are best for vertical and horizontal use?

Lighter duty welding blankets can be used vertically to offer protection against welding sparks and slag. If you are using a blanket horizontally or flat, it is recommended to use a heavier-duty blanket with a higher melt temperature as the spatter has the potential to rest directly on the material.









NOTE: Temperatures and applications are intended as a guideline only and not a guarantee of performance. SureWerx recommends the use of welding blankets in multiple layers to attain proper molten metal and radiant heat protection. It is the user's responsibility to monitor the activity and use of blankets/high-heat materials at all times. The user must inspect the blankets before use. Abnormal wear and tear should be removed from service.



LIGHT DUTY PROTECTION

Welding Blankets Acrylic Coated Fiberglass

| PRODUCT NO. | Product Type | Width | Length | Length Weight (per sq yd.) | | Color |
|-------------|--------------|-------------|--------------|----------------------------|--------|--------|
| 36148 | Roll | 3' (.9m) | 150' (45.8m) | 16 oz. | 0.02" | Red |
| 36149 | Roll | 5' (1.5m) | 150' (45.8m) | 16 oz. | 0.02" | Red |
| 36150 | Roll | 6' (1.8m) | 150' (45.8m) | 23 oz. | 0.034" | Yellow |
| 36151 | Roll | 5' (1.5m) | 150' (45.8m) | 23 oz. | 0.034" | Yellow |
| 36162 | Blanket | 10' (3.0m) | 10' (3.0m) | 23 oz. | 0.034" | Yellow |
| 36163 | Blanket | 8' (2.4m) | 10' (3.0m) | 23 oz. | 0.034" | Yellow |
| 36171 | Blanket | 3.3' (1.0m) | 150' (45.8m) | 23 oz. | 0.034" | Yellow |
| 36293 | Blanket | 6' (1.8m) | 6' (1.8m) | 23 oz. | 0.034" | Yellow |
| 36308 | Blanket | 6' (1.8m) | 8' (2.4m) | 23 oz. | 0.034" | Yellow |
| 37192 | Blanket | 10' (3.0m) | 10' (3.0m) | 15 oz. | 0.02" | Gray |
| 37609 | Blanket | 8' (2.4m) | 8' (2.4m) | 23 oz. | 0.034" | Yellow |
| Custom | Custom | Custom | Custom | 23 oz. | 0.034" | Yellow |





Welding Blankets Uncoated Fiberglass

| PRODUCT NO. | Product Type | Width | Length Weight (per sq yd.) | | Thickness | Color |
|-------------|--------------|-------------|----------------------------|--------|-----------|-------|
| 36144 | Roll | 3.3' (1.0m) | 150' (45.8m) | 18 oz. | 0.028" | White |
| 36145 | Roll | 5' (1.5m) | 150' (45.8m) | 18 oz. | 0.028" | White |
| 36146 | Roll | 5' (1.5m) | 150' (45.8m) | 24 oz. | 0.028" | White |
| 36147 | Roll | 3.3' (1.0m) | 150' (45.8m) | 24 oz. | 0.028" | White |
| 36159 | Blanket | 6' (1.8m) | 8' (2.4m) | 24 oz. | 0.028" | White |
| 36160 | Blanket | 6' (1.8m) | 6' (1.8m) | 24 oz. | 0.028" | White |
| 36161 | Blanket | 8' (2.4m) | 10' (3m) | 18 oz. | 0.028" | White |
| 36167 | Blanket | 10' (3.0m) | 10' (3m) | 18 oz. | 0.028" | White |
| 36290 | Blanket | 6' (1.8m) | 6' (1.8m) | 18 oz. | 0.028" | White |
| 36305 | Blanket | 6' (1.8m) | 8' (2.4m) | 18 oz. | 0.028" | White |
| 36364 | Blanket | 8' (2.4m) | 8' (2.4m) | 18 oz. | 0.028" | White |
| Custom | Custom | Custom | Custom | 18 oz. | 0.028" | White |

Low irritating yarns prevents itch

Tooloo°F working temperature

Ideal for welding, insulation, and jacketing applications

All high-temp fabrics are certified to meet ANSI/FM-4950

Custom Size Blankets Available

JACKSON* WILSON*

MEDIUM DUTY PROTECTION

Welding Blankets Silicone Coated Fiberglass



| PRODUCT NO. | Product Type | Width | Length | Weight (per sq yd.) | Thickness | Color |
|-------------|--------------|-------------|--------------|------------------------|-----------|-------|
| 36173 | Roll | 3.3' (1.0m) | 150' (45.8m) | 32 oz. | 0.04" | Red |
| 36174 | Roll | 5' (1.5m) | 150' (45.8m) | 32 oz. | 0.04" | Red |
| 36155 | Blanket | 6' (1.8m) | 8' (2.4m) | 32 oz. | 0.04" | Red |
| 36156 | Blanket | 6' (1.8m) | 6' (1.8m) | 32 oz. | 0.04" | Red |
| 37592 | Blanket | 10'(3.0m) | 10' (3m) | 32 oz. | 0.04" | Red |
| Custom | Custom | Custom | Custom | 32 oz. | 0.04" | Red |



| PRODUCT NO. | Product Type | Width | Length Weight (per sq yd.) | | Thickness | Color |
|-------------|--------------|-------------|----------------------------|--------|-----------|-------|
| 36152 | Roll | 6' (1.8m) | 150' (45.8m) | 24 oz. | 0.03" | Black |
| 36153 | Roll | 5' (1.5m) | 150' (45.8m) | 24 oz. | 0.03" | Black |
| 36154 | Roll | 3.3' (1.0m) | 150' (45.8m) | 24 oz. | 0.03" | Black |
| 36157 | Blanket | 8' (2.4m) | 8' (2.4m) | 24 oz. | 0.03" | Black |
| 36164 | Blanket | 10' (3.0m) | 10' (3m) | 24 oz. | 0.03" | Black |
| 36166 | Blanket | 8' (2.4m) | 10' (3m) | 24 oz. | 0.03" | Black |
| 36302 | Blanket | 6' (1.8m) | 6' (1.8m) | 24 oz. | 0.03" | Black |
| 36318 | Blanket | 6' (1.8m) | 8' (2.4m) | 24 oz. | 0.03" | Black |
| Custom | Custom | Custom | Custom | 24 oz. | 0.03" | Black |

71

HEAVY-DUTY PROTECTION



Welding Blankets Silica Cloth



| PRODUCT NO. | Product Type | Width | Length | Weight (per sq yd.) | Thickness | Color |
|-------------|--------------|-----------|--------------|------------------------|-----------|-------|
| 36165 | Roll | 3' (.9m) | 150' (45.8m) | 18 oz. | 0.04" | Tan |
| 36291 | Blanket | 6' (1.8m) | 6' (1.8m) | 18 oz. | 0.04" | Tan |
| 36306 | Blanket | 6' (1.8m) | 8' (2.4m) | 18 oz. | 0.04" | Tan |
| Custom | Custom | Custom | Custom | 18 oz. | 0.04" | Tan |

Welding Blankets Carbon Fiber Felt



| PRODUCT NO. | Product Type | Width | Length | Weight (per sq yd.) | Thickness | Color |
|-------------|--------------|-----------|--------------|------------------------|-----------|-------|
| 36158 | Roll | 5' (1.5m) | 75' (22.9m) | 16 oz. | 0.125" | Black |
| 36208 | Roll | 6' (1.8m) | 150' (45.8m) | 16 oz. | 0.125" | Black |
| 36313 | Blanket | 6' (1.8m) | 8' (2.4m) | 16 oz. | 0.125" | Black |
| 36320 | Blanket | 6' (1.8m) | 6' (1.8m) | 16 oz. | 0.125" | Black |
| Custom | Custom | Custom | Custom | 16 oz. | 0.125" | Black |

surewerx.com/usa Table of Contents

JACKSON WILSON



WELDING ACCESSORIES

Double Layer Hand Pad

- Increases the life of your glove
- Allows longer welding time even in high heat applications
- Does not limit mobility
- Sewn and riveted for added durability

Description

• Double layer protection

PRODUCT NO.

36680

Double Layer Hand Pad



CUSTOMIZATION PROGRAM





Wilson is pleased to offer a custom solutions program to fit your specific size and protection needs. We can work with an existing design or be involved in the entire process from start to finish. Each custom order is manufactured to your exact specifications and carefully inspected to ensure the highest quality.

- Orders processed within 24 hours
- Orders shipped within 5 business days
- Competitively priced no matter how complex the job
- Custom grommet placement available or choose without grommets
- Special fabrication program available on transparent welding curtains and blankets

To learn more about what welding curtain or blanket is best for you, contact us today at 800.323.7402. Special made-to-order curtains and blankets are our specialty!

surewerx.com/usa Table of Contents 73





PERSONAL PROJECT

JACKSON° SAFETY

sellstrom

KneePro

@ duenorth°

K1

TABLE OF CONTENTS

| FACE PROTECTION | 79–111 |
|---------------------------------|---------|
| EYE PROTECTION — SAFETY GLASSES | 112–127 |
| EYE PROTECTION — GOGGLES | 128–143 |
| EMERGENCY EYEWASH PRODUCTS | 144–146 |
| HEARING PROTECTION | 147–155 |
| HEAD PROTECTION | 156–173 |
| RESPIRATORY PROTECTION | 174–175 |
| KNEE AND ELBOW PROTECTION | 176–181 |
| CLID DEUTECTION | 192 106 |





FACE PROTECTION

SHELDING YOU FROM THE LENES

Please note: Always wear safety glasses when using face shields.



EXCLUSIVE!



QUAD[™] **500 FACE SHIELDS** — SUPREME MULTI-PURPOSE



Quad™ 500 Multi-Purpose Face Shield System

- Jackson Safety® introduces the all new Quad 500 multi-purpose face shield, our premium face protection product
- The Quad 500 offers an unparalleled range of face and eye protection solutions for almost every application including grinding, cutting, oxy/acetylene cutting, plasma cutting, and brazing
- All Quad 500 products have been designed to offer maximum above-the-neck face protection, including an extra-large molded polycarbonate window featuring our premium Sta-Clear® anti-fog coating
- For added protection, the molded window is completely framed on the sides and chin and features an extra-large crown
- The Quad 500 offers exceptional panoramic views with virtually no distortion

Featuring the exclusive Jackson Safety® 370 Speed Dial™ ratcheting headgear system!

- The Quad 500 features the Jackson Safety® 370 Speed Dial™ ratcheting headgear system an industry best!
- The 370 Speed Dial™ is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly, easily, and conveniently saves time, increases productivity, and improves worker safety!



Available with optional flip-up/flip-down extra-large IR window

- The Quad 500 face shield is also available with an exclusive, extra-large flip-up/flip-down IR window for added eye protection when used in applications producing infrared hazards
- It's easy and safe by keeping the Quad 500 clear window in the down position at all times, the operator can flip the IR shaded window up or down, providing uninterrupted face protection during cutting and grinding operations
- Flip windows available in:
 - Shade 5 IR for oxy/acetylene cutting, brazing, and plasma cutting
 - Shade 8 IR for oxy/acetylene welding and plasma cutting
- Both the clear and flip windows feature detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses
- Two available mounting options:
 - Complete with Jackson Safety's premium 370 Speed Dial™ ratcheting headgear suspension
 - For mounting on slotted hard hats, assembled with Jackson Safety's exclusive HHIS slot adaptors
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models 14220, 14230, 14233, 14235 CSA certified to CAN/CSA Z94.3 standards
- Models 14220, 14230, 14233 **CE certified**



14230

78

FACE SHIELDS — SUPREME MULTI-PURPOSE

Quad™ 500 Series — Crown, Window, and 370 Speed Dial™ Ratcheting Headgear

- Face shield comes with:
 - Stylish crown and wraparound face shield frame
 - Premium molded polycarbonate AF window
 - 370 Speed Dial™ premium ratcheting headgear suspension

| 370 |
|------------|
| SPEED DIAL |

SPEED DIAL

| PRODUCT NO. | Crown | Suspension | Window | Coatings | Chin & Side Guard | Case Qty. |
|-------------|-------|------------|--------|----------|-------------------|-----------|
| 14220 | Black | Ratcheting | Clear | Anti-fog | Yes | 4 |

Quad™ 500 Series — Crown, Window, and HHIS Universal Hard Hat Slot Adaptor

- Face shield comes with:
 - Stylish crown and wraparound face shield frame
 - Premium molded polycarbonate AF window
 - Exclusive Jackson Safety® HHIS universal slot hard hat adaptor

| Fits most s | lotted hard | hats | | | | |
|-------------------------------|-------------|-------------------|--------|----------|-------------------|-----------|
| PRODUCT NO. | Crown | Suspension | Window | Coatings | Chin & Side Guard | Case Qty. |
| 14225 | Rlack | Universal Adaptor | Clear | Anti-Fog | Vac | 4 |

Quad[™] 500 Series — c/w Flip-Up IR Window and 370 Speed Dial[™] Ratcheting Headgear

- Multi-purpose face shield comes with:
 - Stylish crown and wraparound face shield frame
 - Premium molded polycarbonate AF window
 - Extra-large flip-up/flip-down IR visor
 - 370 Speed Dial™ premium ratcheting headgear suspension



Quad™ 500 Series — c/w Flip-Up IR Window and HHIS Universal Hard Hat Slot Adaptor

- Multi-purpose face shield comes with:
 - Stylish crown and wraparound face shield frame
 - Premium molded polycarbonate AF window
 - Extra-large flip-up/flip-down IR visor
 - Exclusive Jackson Safety® HHIS universal slot hard hat adaptor
 - Fits most slotted hard hats

| PRODUCT NO. | Crown | Suspension | Window | Coatings | Flip Visor | Chin & Side Guard | Case Qty. |
|-------------|-------|-------------------|--------|----------|------------|-------------------|-----------|
| 14235 | Black | Universal Adaptor | Clear | Anti-Fog | Shade 5 IR | Yes | 4 |
| 14238 | Black | Universal Adaptor | Clear | Anti-Fog | Shade 8 IR | Yes | 4 |

Quad™ 500 Series Replacement Windows & Parts

| PRODUCT NO. | Description | Fits Models | Case Qty. |
|-------------|---|---------------------|-----------|
| 14250 | 8.58" x 8.24" x .060" Clear Anti-Fog Window | All Quad 500 Models | 12 |
| 14255 | 4.375" x 9.25" x .070" Shade 5 IR Visor | All Quad 500 Models | 12 |
| 14258 | 4.375" x 9.25" x .070" Shade 8 IR Visor | All Quad 500 Models | 12 |
| 20694 | 370 Face Shield Headgear | 14220, 14230, 14233 | 12 |
| 32187 | Replacement Washable Sweatband – 2/pack | 14220, 14230, 14233 | 24 packs |
| 38423 | HHIS Face Shield Hard Hat Adaptor | 14225, 14235, 14238 | 12 |





14220



14225



14230/14233



14235 /14238



32187

20694

38423

Selstrom_® **Exclusive!**



Please note: Always wear safety glasses when using face shields.

DP4 FACE SHIELDS — PREMIUM MULTI-PURPOSE



S32010

DP4 Multi-Purpose Face Shield System

- Sellstrom's exclusive multi-purpose DP4 face shield system has been an industry leader for more than 15 years
- The DP4 offers an incredible range of face protection solutions

DP4 Face Shield Only

- As a standard face shield, the DP4's specially designed molded polycarbonate window curves naturally to fit facial contours
- Offers exceptional panoramic views with virtually no distortion
- Window meets high-impact standards and is chemical resistant
- Available in three full-sized window options: clear anti-fog (S32010), Shade 3 IR (S32030) or Shade 5 IR (S32050)
- Standard DP4 face shields feature a premium ratcheting headgear for maximum operator comfort and convenience
- Model S32261 CSA certified

FACE SHIELDS — PREMIUM MULTI-PURPOSE

DP4 Face Shield with Flip-Up/Flip-Down IR Windows

- The DP4 face shield is also available featuring a unique spring-mounted flip-up/flip-down IR window (4.375" \times 9.25" \times .070")
- It's easy and safe by keeping the full size DP4 clear window in the down position at all
 times, the operator can flip the spring-mounted IR Shaded window up or down, providing
 uninterrupted face protection during cutting and grinding operations
- Flip visor available in:
 - Shade 5 IR for: oxy/acetylene cutting, brazing and plasma cutting
- Shade 6 IR for: oxy/acetylene cutting, brazing and plasma cutting
- Shade 8 IR for: oxy/acetylene welding and plasma cutting
- Shade 6B Cobalt Blue for: oxy/acetylene welding of aluminum and cast iron, in metal and glass furnace foundry work
- Cobalt Blue diffuses the orange glow associated with the sodium in molten metal and glass
- DP4 multi-purpose face shields are available in two mounting options: premium ratcheting headgear suspension or exclusive universal slot adaptors (for mounting on slotted hard hats)

DP4 Face Shields Now Available With Optional Chin Guard

- All DP4 face shields can be fitted with optional chin guard (\$32200) for added below-the-neck
 protection during cutting and grinding operations
- DP4 Face shields can be ordered with the chin guard included, or if you already own a DP4 face shield, the chin guard can be ordered separately and easily attached by the operator

DP4 Safety Standards

- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S32010, S32151, S32181, S32251, S32281 **CSA certified to CAN/CSA Z94.3** standards
- Model S32010 CE certified

sellstrom.



S32151



S32251



sellstrom.



S32010



S32210



S32012



S32151



S32251

FACE SHIELDS — PREMIUM MULTI-PURPOSE

DP4 Series — Crown, Window, and Ratcheting Headgear Only

Face shield comes with:

- Stylish crown
- Full 9" x 12.125" x .060" molded polycarbonate AF window
- Premium ratcheting headgear suspension (\$32011)
- Model S32210 is CSA certified

| PRODUCT NO. | Crown | Suspension | Window Coatings | | Chin Guard | Case Qty. |
|-------------|-------|------------|-----------------|----------|------------|-----------|
| \$32010 | Black | Ratcheting | Clear | Anti-Fog | No | 4 |
| \$32030 | Black | Ratcheting | Shade 3 IR | Uncoated | No | 4 |
| \$32050 | Black | Ratcheting | Shade 5 IR | Uncoated | No | 4 |
| | | | | | | |
| \$32210 | Black | Ratcheting | Clear | Anti-Fog | Yes | 4 |

DP4 Series — Crown, Window, and Universal Hard Hat Slot Adaptor Only

Face shield comes with:

- Stylish crown
- Full 9" x 12.125" x .060" molded polycarbonate AF window
- Features Sellstrom's exclusive universal slot adaptors (S61970)
- Fits most slotted hard hats



\$61970

| PRODUCT NO. | Crown | Suspension | Window | Coatings | Chin Guard | Case Qty. |
|-------------|-------------------------------|-------------------|------------|----------|------------|-----------|
| \$32012 | Black | Universal Adaptor | Clear | Anti-Fog | No | 4 |
| \$32032 | Black | Universal Adaptor | Shade 3 IR | Uncoated | No | 4 |
| \$32052 | Black | Universal Adaptor | Shade 5 IR | Uncoated | No | 4 |
| | | | | | | |
| 532212 | \$32212 Black Universal Adapt | Universal Adaptor | Clear | Anti-Fog | Yes | 4 |

DP4 Series — c/w Flip-Up IR Window, and Ratcheting Headgear

Multi-purpose face shields come with:

- Stylish crown
- Full 9" x 12.125" x .060" molded polycarbonate AF window
- 4.375" x 9.25" x .070" flip-up/flip-down IR visor
- Premium ratcheting headgear suspension (\$32011)

| PRODUCT NO. | Crown | Suspension | Window | Coatings | Flip Visor | Chin Guard | Case Qty. |
|-------------|---------|------------|-------------|----------|----------------|------------|-----------|
| \$32151 | Black | Ratcheting | Clear | Anti-Fog | Shade 5 IR | No | 4 |
| \$32161 | Black R | Ratcheting | Clear | Anti-Fog | Shade 6 IR | No | 4 |
| \$32161B | Black | Ratcheting | eting Clear | Anti-Fog | Shade 6 Cobalt | No | 4 |
| \$32181 | Black | Ratcheting | Clear | Anti-Fog | Shade 8 IR | No | 4 |
| \$32251 | Black | Ratcheting | Clear | Anti-Fog | Shade 5 IR | Yes | 4 |
| \$32261 | Black | Ratcheting | Clear | Anti-Fog | Shade 6 IR | Yes | 4 |
| \$32281 | Black | Ratcheting | Clear | Anti-Fog | Shade 8 IR | Yes | 4 |

FACE SHIELDS — PREMIUM MULTI-PURPOSE

DP4 Series — c/w Flip-Up IR Window, and Universal Hard Hat Slot Adaptor

Multi-purpose face shields come with:

- Stylish crown
- Full 9" x 12.125" x .060" molded polycarbonate AF window
- 4.375" x 9.25" x .070" flip-up/flip-down IR visor
- Features Sellstrom's exclusive universal slot adaptors (S61970)
- Fits most slotted hard hats



S61970

| PRODUCT NO. | Crown | Suspension | n Window Coatings Flip Visor | | Chin Guard | Case Qty. | |
|-------------|----------------|-------------------|------------------------------|----------|----------------|-----------|---|
| \$32152 | Black | Universal Adaptor | Clear | Anti-Fog | Shade 5 IR | No | 4 |
| \$32162 | Black | Universal Adaptor | Clear | Anti-Fog | Shade 6 IR | No | 4 |
| \$32162B | Black Universa | Universal Adaptor | Clear | Anti-Fog | Shade 6 Cobalt | No | 4 |
| \$32182 | Black | Universal Adaptor | Clear | Anti-Fog | Shade 8 IR | No | 4 |
| \$32252 | Black | Universal Adaptor | Clear | Anti-Fog | Shade 5 IR | Yes | 4 |
| \$32262 | Black | Universal Adaptor | Clear | Anti-Fog | Shade 6 IR | Yes | 4 |
| \$32282 | Black | Universal Adaptor | Clear | Anti-Fog | Shade 8 IR | Yes | 4 |

DP4 Series Replacement Windows, and Parts

| PRODUCT NO. | Description | Fits Models | Case Qty. |
|---|---|--|-----------|
| S32000 | Black Crown (only) for Standard Face Shields | All Standard Face Shields | 12 |
| \$32001 | Black Crown (only) for Flip Front Visor Models | All Flip-Up Face Shields | 10 |
| \$32003 | Black Crown with Universal Slot Adaptor for all USA Flip-Up Face Shields Flip-Up Visor Models | All USA Flip-Up Face Shields | 30 |
| \$32011 Replacement Ratcheting Headgear | | \$32010, \$32030, \$32050, \$32151, \$32161, \$32161B, \$32181, \$32210, \$32251, \$32261, \$32281 | 10 |
| \$32100 | 9" x 12.125" x .060" Clear Anti-Fog Window | All DP4 Models | 120 |
| \$32130 | 9" x 12.125" x .060" Shade 3 IR Window | \$32030 | 120 |
| \$32150 | 9" x 12.125" x .060" Shade 5 IR Window | \$32050 | 120 |
| \$32155 | 4.375" x 9.25" x .070" Shade 5 IR Visor | S32151, S32152, S32153, S32251, S32252 | 120 |
| S32166 | 4.375" x 9.25" x .070" Shade 6 IR Visor | S32161, S32162, S32163, S32261, S32262 | 120 |
| S32166B | 4.375" x 9.25" x .070" Shade 6 Cobalt Blue Visor | S32161B, S32162B, S32163B | 120 |
| \$32188 | 4.375" x 9.25" x .070" Shade 8 IR Visor | S32181, S32182, S32183, S32281, S32282 | 120 |
| 532200 | Optional Chin Guard only | All DP4 Models | 20 |



S32052

sellstrom.

Sellstrom Universal Slot Adapter fits most slotted hard hats.



S32152



S32252



S32000



S32003



S32011



S32155



S32200



EXCLUSIVE!



MAXVIEW[™] FACE SHIELDS — PREMIUM



Maxview™ Face Shield System

- Jackson Safety® introduces the all new Maxview face shield, a premium face protection product
- The Maxview is designed to offer maximum face protection coverage, incorporating an extra-large clear polycarbonate window that is available in two options: without anti-fog treatment or with our premium Sta-Clear® anti-fog coating
- $\bullet \ \ \, \text{The high-impact PC window is then framed on the side and chin areas and features an extra-large crown}$
- This combination translates into maximum coverage, head to lower neck, and side to side. In fact, Maxview offers a full 1" of extra window protection on each side (2" total) versus the leading face shield model, ensuring best-in-class protection and exceptional panoramic views. Check and compare!
- Given its amazing coverage and viewing area, the Maxview is incredibly light
- Maxview incorporates engineered detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses
- Two available mounting options:
 - Complete with Jackson Safety's premium 370 Speed $\mathsf{Dial}^{\scriptscriptstyle{\mathsf{IM}}}$ ratcheting headgear suspension
 - For mounting on slotted hard hats, assembled with Jackson Safety's exclusive HHIS slot adaptors

Featuring the exclusive Jackson Safety® 370 Speed Dial™ ratcheting headgear system!

- The Maxview face shield features the Jackson Safety® 370 Speed Dial™ ratcheting headgear system an industry best!
- The 370 Speed Dial[™] is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly, easily, and conveniently — saves time, increases productivity, and improves worker safety!



- All models meet or exceed ANSI Z87.1+ high impact standards
- Models 14200, 14201 CSA certified to CAN/CSA Z94.3 standards
- Models 14200, 14201 **CE certified**

Hard Hat Interchange system available



FACE SHIELDS — PREMIUM

Maxview[™] Series — Crown, Window, and 370 Speed Dial[™] Ratcheting Headgear

- Face shield comes with:
 - Extra-large stylish crown and wraparound face shield frame
 - High-impact polycarbonate window (with or without anti-fog)
 - 370 Speed Dial™ premium ratcheting headgear suspension



| PRODUCT NO. | Crown | Suspension | Window | Coatings | Chin & Side Guard | Case Qty. | |
|-------------|-------|------------|--------|----------|-------------------|-----------|---|
| 14200 | Black | Ratcheting | Clear | None | Yes | 4 | ĺ |
| 14201 | Black | Ratcheting | Clear | Anti-Fog | Yes | 4 | |

Maxview[™] Series — Crown, Window, and HHIS Universal Hard Hat Slot Adaptor

- Face shield comes with:
 - Extra-large stylish crown and wraparound face shield frame
 - High-impact polycarbonate window (with or without anti-fog)
 - Exclusive Jackson Safety® HHIS universal slot hard hat adaptor
 - Fits most slotted hard hats



| PRODUCT NO. | Black Universal Adaptor | | Window | Coatings | Chin & Side Guard | Case Qty. |
|-------------|-------------------------|-------------------|--------|----------|-------------------|-----------|
| 14202 | | | Clear | None | Yes | 4 |
| 14203 | Black | Universal Adaptor | Clear | Anti-Fog | Yes | 4 |

Maxview[™] Series Replacement Windows & Parts

| PRODUCT NO. | Description | Fits Models | Case Qty. |
|-------------|---|--------------------|-----------|
| 14214 | Clear replacement window | All Maxview Models | 36 |
| 14215 | Clear replacement window – Anti-fog | All Maxview Models | 36 |
| 20695 | 370 Speed Dial replacement headgear | 14200, 14201 | 12 |
| 32187 | Replacement Washable Sweatband – 2/pack | 14200, 14201 | 24 packs |
| 38424 | HHIS Face Shield Hard Hat Adaptor | 14202, 14203 | 6 |





14200/14201



14202/14203







Please note: Always wear safety glasses when using face shields.





S38110


380 FACE SHIELDS — WADE IN USA PREMIUM DUAL CROWN



380 Series Face Shields

- Sellstrom's 380 Series "Dual Crown" face shields have been the industry standard for decades
- Made in the USA, these premium face shields are manufactured using superior, extra wide polycarbonate windows
- Anti-fog models are treated using an exclusive Sta-Clear® chemical solution that is superior to other anti-fog treatments
- These face shields are virtually 100% fog free
- The 380 Series "crown and chin" combination offers an exclusive extra-wide side window, as well as oversized crown and chin guards
- You can't buy better protection from splashes, flying particles, and debris
- Complete units feature premium 6.5" x 19.5" x.040" clear, Sta-Clear® anti-fog, Shade 5 IR, and dark green tinted windows
- Windows attach using exclusive Sellstrom patterned pin mount design
- Available with exclusive Sellstrom designed Ratchet Headgear suspension (S27051) or Universal Slotted Hard Hat Adapter (S61970)
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S38110, S38140, S38150 CSA certified to CAN/CSA Z94.3 standards
- Models S38110, S38140, S38150, S38410, S38440 CE certified



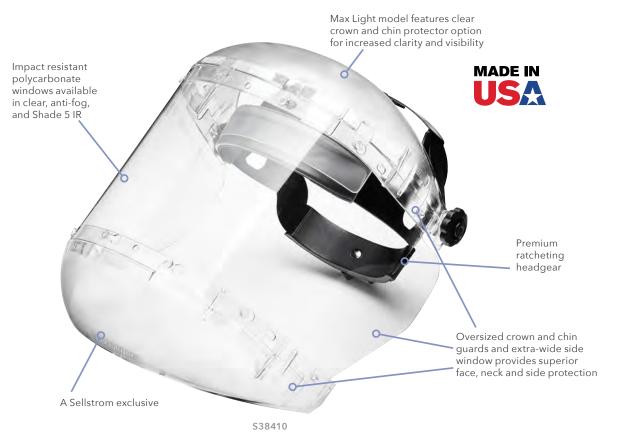

380 Series — Dual Crown, Window, and Ratcheting Headgear

Face shield comes with:

- Extra-large high impact blue crown and chin protector
- Premium polycarbonate extra-wide scratch-resistant windows
- Premium ratcheting headgear suspension (S27051)

| PRODUCT NO. | Crown | Chin | Suspension | Tint | Coatings | Case Qty. |
|-------------|-------|------|------------|------------|---------------------|-----------|
| \$38110 | Blue | Blue | Ratcheting | Clear | Uncoated | 4 |
| \$38140* | Blue | Blue | Ratcheting | Clear | Sta-Clear® Anti-Fog | 4 |
| \$38150 | Blue | Blue | Ratcheting | Shade 5 IR | Uncoated | 4 |

380 Series "MAX LIGHT" — Dual Crown, Window, and Ratcheting Headgear

Face shield comes with:

- Extra-large high impact clear crown and chin protector
- Premium polycarbonate extra-wide scratch resistant windows
- Premium ratcheting headgear suspension (S27051)

| PRODUCT NO. | Crown | Chin | Suspension | Tint | Coatings | Case Qty. |
|-------------|-------|-------|------------|-------|---------------------|-----------|
| \$38410 | Clear | Clear | Ratcheting | Clear | Uncoated | 4 |
| S38440* | Clear | Clear | Ratcheting | Clear | Sta-Clear® Anti-Fog | 4 |

^{*}Please note: Anti-fog windows use an acetate window instead of a polycarbonate window.



S38110



S38440

sellstrom.



S38210



S38540



S36000



S36050



S27051

FACE SHIELDS — PREMIUM DUAL CROWN



380 Series — Dual Crown, Window, and Universal Hard Hat Slot Adaptor

Face shield comes with:

- Extra-large high impact blue crown and chin protector
- Premium polycarbonate extra-wide scratch resistant windows
- Exclusive universal hard hat slot adaptor (S61970)
- Fits most slotted hard hats



| PRODUCT NO. | Crown | Chin | Suspension | Tint | Coatings | Case Qty. |
|-------------|-------|------|-------------------|-------------|---------------------|-----------|
| \$38210 | Blue | Blue | Universal Adaptor | Clear | Uncoated | 4 |
| \$38230 | Blue | Blue | Universal Adaptor | Dark Green† | Uncoated | 4 |
| \$38240* | Blue | Blue | Universal Adaptor | Clear | Sta-Clear® Anti-Fog | 4 |
| \$38250 | Blue | Blue | Universal Adaptor | Shade 5 IR | Uncoated | 4 |

†Not for use as IR protection

380 Series "MAX LIGHT" — Dual Crown, Window, and Universal Hard Hat Slot Adaptor

Face shields come with:

- Extra-large high impact clear crown and chin protector
- Premium acetate extra-wide scratch resistant windows
- Exclusive universal hard hat slot adaptor (S61970)
- Fits most slotted hard hats



S61970

| PRODUCT | NO. Crown | Chin | Suspension | Tint | Coatings | Case Qty. |
|---------|-----------|-------|-------------------|-------|---------------------|-----------|
| \$3851 | O Clear | Clear | Universal Adaptor | Clear | Uncoated | 4 |
| \$38540 |)* Clear | Clear | Universal Adaptor | Clear | Sta-Clear® Anti-Fog | 4 |

380 Series Replacement Windows

- Sellstrom carries a wide range of replacement acetate windows
- Available in clear, Sta-Clear™ Anti-Fog, Shade 5 IR, and dark green
- All windows listed below fit the Sellstrom 380 Series dual crown platform
- Windows attachment pattern exclusive to Sellstrom's 380 Series crown

| PRODUCT NO. | Window Dimensions | Tint | Coatings | Case Qty. |
|-------------|---------------------|-------------|---------------------|-----------|
| \$36000 | 6.5" x 19.5" x.040" | Clear | Uncoated | 125 |
| \$36020 | 6.5" x 19.5" x.040" | Dark Green† | Uncoated | 125 |
| \$36040* | 6.5" x 19.5" x.040" | Clear | Sta-Clear™ Anti-Fog | 125 |
| \$36050 | 6.5" x 19.5" x.040" | Shade 5 IR | Uncoated | 100 |

†Not for use as IR protection

Please note: For replacement ratcheting headgear, use #S27051.

*Anti-fog windows use an acetate window instead of a polycarbonate window.





390 FACE SHIELDS — PREMIUM SINGLE CROWN

390 Series Face Shields

- Sellstrom's 390 Series face shields have been the industry standard for decades
- Made in the USA, these premium face shields are manufactured using superior polycarbonate windows
- Anti-fog models are treated using an exclusive Sta-Clear® chemical solution that is superior to other anti-fog treatments
- These face shields are virtually 100% fog free
- The shield curves naturally to fit facial contours excellent protection from splash, chemical splash, particles and flying debris
- Extra-large high impact crown provides excellent above-the-head coverage
- Complete units available with standard 8" x 12" x .040" clear, Sta-Clear® Anti-Fog, and Shade 5 IR windows
- Extra-large 8" x 16" x .040" windows are also available (optional)
- $\bullet \;\;$ Windows attach using exclusive Sellstrom patterned pin mount design
- Headgear models available with pinlock or Sellstrom's exclusive ratcheting headgear suspensions (S27051)
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S39110, S39140, and S39150 CSA certified to CAN/CSA Z94.3 standards



S39110

sellstrom.



S39010 (Pinlock)



S39110



S39150



S39210



S39250

FACE SHIELDS — PREMIUM SINGLE CROWN



390 Series — Single Crown, Window, and Pinlock Headgear

Face shield comes with:

- Extra-large high impact blue crown
- Premium polycarbonate scratch-resistant windows (two sizes available)
- Pinlock headgear suspension

| PRODUCT NO. | Crown | Suspension | Window Dimensions | Tint | Coatings | Case Qty. |
|-------------|-------|------------|-------------------|------------|---------------------|-----------|
| \$39010 | Blue | Pinlock | 8" x 12" x .040" | Clear | Uncoated | 12 |
| \$39020 | Blue | Pinlock | 8" x 16" x .040" | Clear | Uncoated | 12 |
| \$39040* | Blue | Pinlock | 8" x 12" x .040" | Clear | Sta-Clear® Anti-Fog | 12 |
| \$39050 | Blue | Pinlock | 8" x 12" x .060" | Shade 5 IR | Uncoated | 12 |

390 Series — Single Crown, Window, and Ratcheting Headgear

Face shield comes with:

- Extra-large high impact blue crown
- Premium polycarbonate scratch resistant windows (two sizes available)
- Premium ratcheting headgear suspension (S27051)
- Model S39150 is CSA certified

| PRODUCT NO. | Crown | Suspension | Window Dimensions | Tint | Coatings | Case Qty. |
|-------------|-------|------------|-------------------|------------|---------------------|-----------|
| \$39110 | Blue | Ratcheting | 8" x 12" x .040" | Clear | Uncoated | 12 |
| \$39120 | Blue | Ratcheting | 8" x 16" x .040" | Clear | Uncoated | 12 |
| \$39140* | Blue | Ratcheting | 8" x 12" x .040" | Clear | Sta-Clear® Anti-Fog | 12 |
| \$39150 | Blue | Ratcheting | 8" x 12" x .060" | Shade 5 IR | Uncoated | 12 |

390 Series — Single Crown, Window, and Universal Hard Hat Slot Adaptor

Face shield comes with:

- Extra-large high impact blue crown
- Premium polycarbonate scratch resistant windows
- Exclusive universal hard hat slot adaptor (S61970)
- Fits most slotted hard hats



S61970

| PRODUCT NO. | Crown | Suspension | Window Dimensions | Tint | Coatings | Case Qty. |
|-------------|-------|-------------------|-------------------|------------|---------------------|-----------|
| \$39210 | Blue | Universal Adaptor | 8" x 12" x .040" | Clear | Uncoated | 24 |
| \$39240* | Blue | Universal Adapter | 8" x 12" x .040" | Clear | Sta-Clear® Anti-Fog | 24 |
| \$39250 | Blue | Universal Adaptor | 8" x 12" x .060" | Shade 5 IR | Uncoated | 24 |

^{*}Please note: Anti-fog windows use an acetate window instead of a polycarbonate window.

FACE SHIELDS — PREMIUM SINGLE CROWN



390 Series — Single Crown and Headgear Only (No Window)

Comes with:

- Extra-large high impact blue crown
- Headgear suspension of your choice
- Windows ordered separately (see window assortment below)

| PRODUCT NO. | Crown | Suspension | Case Qty. |
|-------------|-------|--|-----------|
| \$39000 | Blue | Pinlock Headgear | 20 |
| \$39100 | Blue | Ratcheting Headgear | 20 |
| \$39200 | Blue | Universal Hard Hat Slot Adaptor (S61970 for Slotted Hard Hats) | 50 |

390 Series Replacement Windows

- Sellstrom carries a wide range of replacement/optional premium polycarbonate windows
- Available in clear, Sta-Clear TM Anti-Fog, Shade 5 IR, and dark green
- All windows listed below can be fitted to the Sellstrom 390 Series crown
- Window attachment pattern exclusive to Sellstrom's 390 Series crown

| PRODUCT NO. | Window Dimensions | Tint | Coatings | Case Qty. |
|-------------|-------------------|-------------|---------------------|-----------|
| \$35000 | 8" x 12" x .040" | Clear | Uncoated | 250 |
| \$35020 | 8" x 12" x .040" | Dark Green* | Uncoated | 250 |
| \$35040 | 8" x 12" x .040" | Clear | Sta-Clear® Anti-Fog | 250 |
| \$35050 | 8" x 12" x .060" | Shade 5 IR | Uncoated | 200 |
| | | | | |
| \$35100 | 8" x 16" x.040" | Clear | Uncoated | 200 |
| \$35120 | 8" x 16" x .040" | Dark Green* | Uncoated | 120 |
| \$35140 | 8" x 16" x .040" | Clear | Sta-Clear® Anti-Fog | 200 |
| \$35150 | 8" x 16" x .040" | Shade 5 IR | Uncoated | 120 |

^{*}Not for use as IR protection

FACE SHIELDS — REPLACEMENT PARTS

Replacement Headgear

 Sellstrom designed ratcheting headgear allows quick and easy, positive lock adjustability and great operator comfort

| PRODUCT NO. | Description | Fits Series | Package Qty. |
|-------------|---------------------------------|---------------|--------------|
| \$27051 | Replacement Ratcheting Headgear | 311, 380, 390 | 10/Box |

sellstrom_®



S39000 (Pinlock)



S39100



S39200



S35000



S35050



S27051

Table of Contents

sellstrom_®



312 FACE SHIELDS — PREMIUM ARC-FLASH RATED

S31200

312 Series Arc Flash Rated Face Shields



- Sellstrom Arc Flash-rated face shields provide protection from low level arc flash hazards
- Arc flash is created by an electric arc and can result in an explosive condition releasing electromagnetic energy, fragments and molten metals that can cause serious injury
- Sellstrom Arc Flash face shields feature a unique, molded high-impact and splash resistant polycarbonate window
- Provides optimum clarity with no distortion and panoramic vision
- Specially formulated window incorporates a light green tinted window that allows 55% light transmittance and true color optics
- These true color optics allow the operator to see all colors perfectly. This is critical when working around color coded wiring in electrical applications
- Two window versions: 9.9 Cal/cm² and 12 Cal/cm² ATPV rating
- Face shield curves naturally to fit facial contours, providing superior protection
- Available with or without hard hat, with a dielectric hard hat adaptor

312 Standards

 All product meets ANSI Z87.1+ high-impact standards, tested and certified to ASTM F-2178 specifications and NFPA 70E-2009 standards

FACE SHIELDS — PREMIUM ARC-FLASH RATED

312 Series — Dual Crown, Window, and Ratcheting Headgear

This model comes with:

- Premium ratcheting headgear suspension (\$32011)
- Black high-impact crown and chin protector
- 9.9 Cal/cm² molded polycarbonate window

| PRODUCT NO. | Crown | Chin | Suspension | Window Dimensions | Treatment | Case Qty. |
|-------------|-------|-------|------------|-------------------|-----------|-----------|
| \$31200 | Black | Black | Ratcheting | 8" x 15" x .060" | Uncoated | 4 |

312 Series — Dual Crown, Window, and Universal Hard Hat Slot Adaptor

This model comes with:

- Black high-impact crown and chin protector
- Universal slotted dielectric hard hat adaptor (S61970)
- 9.9 Cal/cm² molded polycarbonate window



S61970

| PRODUCT NO. | Crown | Chin | Suspension | Window Dimensions | Treatment | Case Qty. |
|-------------|-------|-------|-------------------|-------------------|-----------|-----------|
| \$31201 | Black | Black | Universal Adaptor | 8" x 15" x .060" | Uncoated | 4 |

312 Series — Window, Adapter Bracket & Hard Hat Combination

This model comes with:

- Sellstrom six-point suspension white hard hat (S69500)
- Dielectric face shield bracket with slot adaptors (S61610)
- 12 Cal/cm² molded polycarbonate window

| PRODUCT NO. | Helmet | Visor | Window Dimensions | Treatment | Case Qty. |
|-------------|--------|-------|---------------------|-----------|-----------|
| \$31223 | White | Black | 9.75" x 20" x .060" | Uncoated | 4 |

312 Series — Window and Adapter Bracket with Hard Hat Slot Adapters

This model comes with:

surewerx.com/usa

- Dielectric face shield bracket with hard hat slot adaptors (S61610)
- 12 Cal/cm² molded polycarbonate window

| PRODUCT NO. | Visor | Suspension | Window Dimensions | Treatment | Case Qty. |
|-------------|-------|-------------------|--------------------------|-----------|-----------|
| S31224 | Black | Universal Adaptor | 9.75" x 20" x .060" | Uncoated | 4 |

312 Series — Replacement Windows

| PRODUCT NO. | Window Dimensions | ATPV Rating | Treatment | Fits Models | Case Qty. |
|-------------|---------------------|-------------------------|-----------|-----------------------|-----------|
| \$31220 | 8" x 15" x .060" | 9.9 Cal/cm ² | Uncoated | \$31200, 31201, 31202 | 30 |
| \$31222 | 9.75" x 20" x .060" | 12 Cal/cm ² | Uncoated | S31223, 31224 | 30 |

sellstrom_®



S31200



S31201



S31223



S31220

93




sellstrom.

THE WORLD'S MOST COMPREHENSIVE UNIVERSAL MOUNT FACE SHIELD SYSTEM!


That's right! Jackson Safety® and Sellstrom®, two of the oldest safety brands in America, have joined forces to offer the most comprehensive universal mount face shield program anywhere! Whatever the job, we've got the perfect solution. Check out the next few pages and see for yourself. Our wide range of mounting options include four models of universal mount ratcheting headgear crowns, not the least of which is our new F4XP, featuring Jackson's world-famous 370 Speed Dial™ "comfort fit" headgear. The F4XP is simply the best, most comfortable face shield crown − period! From there, we offer over 15 models of universal mount hard hat face shield brackets, including Jackson's famous Hard Hat Interchange System face shield kit, and finally, our range of universal mount face shield windows includes the widest range of shapes, sizes and types under one roof. When you put it all together, there are hundreds of available options and solutions for you to choose from.

ALL PRODUCTS ON PAGES 96-109 INCORPORATE UNIVERSAL PIN PATTERN MOUNT SYSTEM

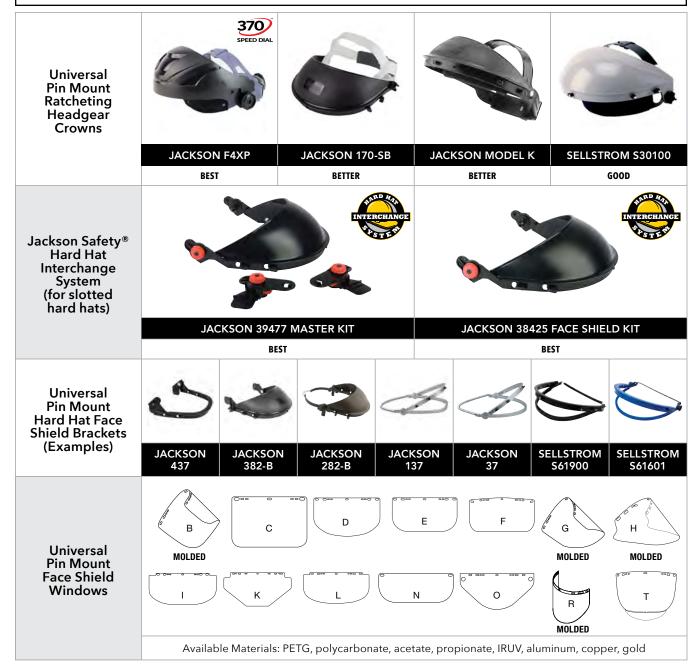

FACE SHIELDS — CROWNS, HEADGEAR, AND WINDOW KITS (UNIVERSAL MOUNTS)

301/303 Advantage Series





- ABS injection molded crowns feature universal bracket pin pattern for use with universal mount windows
- Complete units available in single crown (301 Series) and dual crown (303 Series) versions with ratcheting headgear suspension
- Single crown units are available:
 - Complete with standard or aluminum bound windows and ratcheting headgear or;
 - Purchase the crown and headgear only and choose from a wide range of universal mount windows

Advantage Series Standards

- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S30110, S30120, S30310 CSA certified to CAN/CSA Z94.3 standards
- Models S30100, S30110, S30120 CE certified

301 Series — Single Crown and Ratcheting Headgear Only

- Gray ABS crown and comfortable ratcheting headgear
- Crown can be used to mount all Jackson and Sellstrom universal face shield windows as well as many other common brands found in the North American market
- Extremely versatile face shield mounting system

| PRODUCT NO. | Crown | Suspension | Window Compatibility | Case Qty. |
|-------------|-------|------------|------------------------------------|-----------|
| \$30100 | Gray | Ratcheting | Most Universal Face Shield Windows | 30 |

301 Series — Single Crown, Window, and Ratcheting Headgear

- Gray ABS crown and comfortable ratcheting headgear suspension
- Crown can be used to mount all Jackson and Sellstrom universal face shield windows as well as many other common brands found in the North American market
- Comes complete with standard or aluminum bound 8" x 15.5" x .040" clear polycarbonate windows
- Extremely versatile face shield mounting system

| PRODUCT NO. | Crown | Suspension | Window | Tint | Treatment | Case Qty. |
|-------------|-------|------------|----------------|-------|-----------|-----------|
| \$30110 | Gray | Ratcheting | Aluminum Bound | Clear | Uncoated | 25 |
| \$30120 | Gray | Ratcheting | Standard | Clear | Uncoated | 25 |

303 Series — Dual Crown, Window, and Ratcheting Headgear

- New to Sellstrom, this face shield offers both a crown and chin guard for added below-the-neck protection
- Comfortable ratcheting headgear suspension
- Window can be easily replaced (\$37599)

| PRODUCT NO. | Crown | own Chin Suspension Wi | | Window Tint | Treatment | Case Qty. |
|-------------|-------|------------------------|------------|-------------|-----------|-----------|
| \$30310 | Gray | Gray | Ratcheting | Clear | Uncoated | 16 |

sellstrom.



Universal \$30100 pin mount window system



S30110



S30120



S30310





14262 (kit)

F4XP

F4XP Premium Crown and 370 Speed Dial™ Ratcheting Headgear



- Jackson Safety® introduces the all new F4XP face shield crown and headgear, a premium face protection product
- The F4XP has been specially designed to offer maximum protection, ease of use, and extreme comfort and fit
- The oversized crown is manufactured using premium, high impact-rated materials for optimum safety
- Features an exclusive quick removal mounting system, ensuring fast and easy (universal) window changes
- The F4XP is designed to mount all universal pattern face shield windows including the full range
 of Jackson Safety® windows (F10, F20, F30, F40, and F50), making it one of the most advanced
 and versatile face shield programs in the world!
- Comes standard with a soft fabric replaceable front sweatband for improved comfort
- All models meet or exceed **ANSI Z87.1+ high impact** standards
- Models 14260 is CSA certified to CAN/CSA Z94.3 standards when used in conjunction with windows 29087, 29080, 29106, and 30706
- Models 14260, 14262 CE certified

Featuring the Exclusive Jackson Safety® 370 Speed Dial™ Ratcheting Headgear System

- The F4XP crown features the Jackson Safety® 370 Speed Dial ratcheting headgear system an industry best!
- The 370 Speed Dial is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized
 adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly,
 easily, and conveniently saves time, increases productivity, and improves worker safety!

FACE SHIELDS — CROWNS, HEADGEARS, AND WINDOW KITS (UNIVERSAL MOUNTS)



F4XP Premium Crown, 370 Speed Dial Ratcheting Headgear and Window Kit

| PRODUCT NO. | Crown | Suspension | Window | Mounting Pattern | Case Oty. |
|-------------|-------|---------------------------------------|-----------------------------------|----------------------------------|-----------|
| 14260 | Black | 370 Speed Dial Ratcheting Headgear | None | Universal Bracket Pin Pattern | 12 |
| 14262 | Black | 370 Speed Dial Ratcheting Headgear | 29087 Clear 8" x 15.5" x .060" | Universal Bracket Pin Pattern | 12 |



JACKSO

14260 (Front)




14262 (kit)

F4XP Replacement Windows & Parts

surewerx.com/usa

| PRODUCT NO. | Description | Fits Models | Case Qty. |
|-------------|---|--------------|-----------|
| 20695 | 370 Speed Dial™ Ratcheting Headgear | 14260 | 12 |
| 29087 | 8 x 15.5" x .060" Clear Molded Replacement Window | 14260, 14262 | 12 |
| 32187 | Replacement Washable Sweatband – 2/pack | 14260, 14262 | 24 packs |
| 38424 | HHIS Face Shield Hard Hat Adaptor (option) | 14260, 14262 | 6 |

F4XP Can be Used with Over 40 Jackson Windows

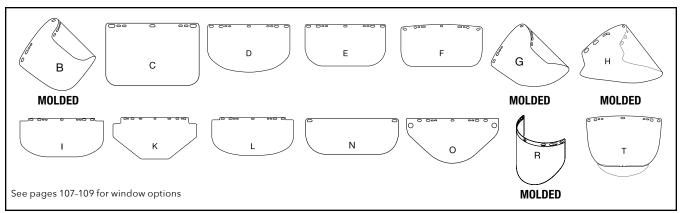









14940/29077



14381/29051



29076

FACE SHIELDS — CROWNS, HEADGEARS, AND WINDOW KITS (UNIVERSAL MOUNTS)

170-SB — Single Crown and Ratcheting Headgear Only

- Our most popular legacy Jackson ratcheting crown and headgear!
- Features universal bracket pin pattern for use with universal mount windows
- Black injection molded crown and comfortable ratcheting headgear
- Large ratcheting adjuster knob is easy to find and use even with gloves
- Replaceable sweatband included (#14958)
- Available in 12 pack or 40-piece bulk pack
- Meets ANSI Z87.1+ high-impact and CAN/CSA Z94.3 standards

| PRODUCT NO. | Old Code | Crown | Suspension | Mounting Pattern | Case Qty. |
|-------------|----------|-------|------------|-------------------------------|-----------|
| 14940 | 3002436 | Black | Ratcheting | Universal Bracket Pin Pattern | 12 |
| 29077 | 3002447 | Black | Ratcheting | Universal Bracket Pin Pattern | 40 (bulk) |

** BETTER

**

BETTER

GOOD

Model K — Single Crown and Ratcheting Headgear Only

- A long-standing Jackson ratcheting crown and headgear!
- Features universal bracket pin pattern for use with universal mount windows
- Black injection molded crown and comfortable ratcheting headgear
- Ratcheting adjuster knob is easy to find and use
- Replaceable sweatband included (#14958)
- Available in 12 pack or 60-piece bulk pack
- Meets ANSI Z87.1+ high-impact and CAN/CSA Z94.3 standards

| PRODUCT NO. | Old Code | Crown | Suspension | Mounting Pattern | Case Qty. |
|-------------|----------|-------|------------|-------------------------------|-----------|
| 14381 | 3000001 | Black | Ratcheting | Universal Bracket Pin Pattern | 12 |
| 29051 | 3000006 | Black | Ratcheting | Universal Bracket Pin Pattern | 60 (bulk) |

Model 131-B — Single Crown, Pinlock Headgear

- A basic crown and pinlock headgear designed for comfort, fit, and value
- Features universal bracket pin pattern for use with universal mount windows
- Easy-to-use pinlock adjuster mechanism set it and forget it!
- Black injection molded crown
- Replaceable sweatband included (#14958)
- Meets ANSI Z87.1+ high-impact and CAN/CSA Z94.3 standards

| PRODUCT NO. | Old Code | Crown | Suspension | Mounting Pattern | Case Qty. |
|-------------|----------|-------|------------|-------------------------------|-----------|
| 29076 | 3000012 | Black | Pinlock | Universal Bracket Pin Pattern | 12 |

JACKSON 14955 FACE SHIELD KIT **ANTHEM** Kit includes: • 170-SB crown and headgear • Model 29092 F30 acetate window 9" x 15.5" x .040" clear shape D

JACKSON 14953 FACE SHIELD KIT



Kit includes:

- 170-SB crown and headgear
- Model 30706 F20 high impact polycarbonate window 8" x 15.5" x .040" clear shape E

FACE SHIELDS — HARD HAT ADAPTOR BRACKETS

JACKSON SAFETY® FACE SHIELD HARD HAT ADAPTOR BRACKETS

- Jackson Safety® carries the widest range of face shield hard hat adaptors anywhere
- Range covers adaptors for slotted and non-slotted, regular, and wide brim hard hats
- Available in regular and dielectric models
- All models incorporate the popular universal bracket pin pattern for use with universal mount windows
- Swivel locking pins securely mount windows to bracket
- Vertical lock-in eliminates face shield creep

Model A-5500X Slotted Cap Adaptor

- A basic face shield hard hat adaptor bracket
- Curved injection molded channel fits over the hard hat bill
- Vertical lock-in eliminates face shield creep
- Attaches to SC-6, Sentry III®, Charger®, and many other slotted hard hat brands

| PRODUCT NO. | PRODUCT NO. Old Code Fits Hard Hat Type | | Fits Windows | Case Qty. |
|-------------|---|--------------------------|-------------------|-----------|
| 14506 | 3000448 | Cap Style (Regular Brim) | Universal Windows | 12 |

HHIS Slotted Cap Adaptor with Crown

- A Jackson Safety® exclusive
- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety
- See page 105 for complete details and advantages of the Hard Hat Interchange System
- Attaches to SC-6, Sentry III®, Charger®, and many other slotted hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 38425 | N/A | Cap Style (Regular Brim) | Universal Windows | 6 |

Model 82 B Slotted Cap Adaptor with Crown

- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety
- Attaches to any hard hat using Jackson's model 87 Mounting Blades (#14939, above)
- #14941 82 B cap adaptor uses plastic detach mounting brackets
- #14949 82 BM cap adaptor uses metal detach mounting bracket

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Bracket | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|---------|-------------------|-----------|
| 14941 | 3002438 | Cap Style (Regular Brim) | Plastic | Universal Windows | 12 |
| 14949 | 3002446 | Cap Style (Regular Brim) | Metal | Universal Windows | 12 |

Model 437 Slotted Cap Adaptor — Dielectric

- A popular style dielectric face shield hard hat adaptor bracket
- Curved injection molded channel fits over the hard hat bill
- Dielectric made entirely of non-conductive materials
- Attaches to SC-6, Sentry III $^{\circ}$, Charger $^{\circ}$, and many other slotted hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 14947 | 3002444 | Cap Style (Regular Brim) | Universal Windows | 12 |

Model 382 B Slotted Cap Adaptor with Crown — Dielectric

- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety
- Dielectric made entirely of non-conductive materials
- Attaches to SC-6, Sentry III®, Charger®, and many other slotted hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 14944 | 3002441 | Cap Style (Regular Brim) | Universal Windows | 12 |
| 14951 | 3002449 | Cap Style (Regular Brim) | Universal Windows | 40 (Bulk) |





14506



38425



14941

MADE IN

MADE IN

USA

MADE IN



4949



14947



14944/14951



JACKSON°



14391



14948



14390



14943/14952



100

FACE SHIELDS — HARD HAT ADAPTOR BRACKETS

FACE SHIELD BRACKETS FOR CAP STYLE NON-SLOTTED HARD HATS (REGULAR BRIM)

- Jackson offers five styles of face shield brackets for cap style (regular brim) hard hats
- Three models feature curved metal channels that fit over the hard hat brim
- Two models feature oversized crowns for added protection
- A hard hat face shield bracket for all applications

Model P Cap Adaptor

- Vertical lock-in eliminates face shield creep
- Curved metal channels fit over the hard hat brim
- Brackets feature durable expandable spring tensioner self adjusts
- Features three easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 14391 | 3000034 | Cap Style (Regular Brim) | Universal Windows | 24 |

Model 137 Cap Adaptor

- Vertical lock-in eliminates face shield creep
- Curved metal channels fit over the hard hat brim
- Brackets feature durable expandable spring tensioner self adjusts
- Features five easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III®, Charger®, and many other slotted hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 14948 | 3002445 | Cap Style (Regular Brim) | Universal Windows | 12 |

Model C Cap Adaptor

- Vertical lock-in eliminates face shield creep
- Curved metal channels fit over the hard hat brim
- Can also be used with the hard hat in reverse donning mode
- Brackets feature durable expandable spring tensioner self adjusts
- Features easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 14390 | 3000032 | Cap Style (Regular Brim) | Universal Windows | 24 |

Model 282-B Cap Adaptor with Crown

- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety
- Specially designed metal clips press over the hard hat rim for maximum stability and firm fit
- Features five easy-to-swivel lock mounting pins for universal windows
- An extremely popular cap adaptor
- Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 14943 | 3002440 | Cap Style (Regular Brim) | Universal Windows | 12 |
| 14952 | 3002450 | Cap Style (Regular Brim) | Universal Windows | 40 (Bulk) |

Model 182 B Cap Adaptor with Crown

- Vertical lock-in eliminates face shield creep
- Oversized crown for added safety
- Features five easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 14942 | 3002439 | Cap Style (Regular Brim) | Universal Windows | 12 |





MADE IN

USA

Reverse Donning

MADE IN

MADE IN

surewerx.com/usa

MADE IN

USA



FACE SHIELDS — HARD HAT ADAPTOR BRACKETS

FACE SHIELD BRACKETS FOR CAP STYLE NON-SLOTTED HARD HATS — DIELECTRIC

- Two models for use with most cap style, non-slotted hard hats
- Dielectric made entirely of non-conductive materials
- Ideal for arc flash and electrical work

Model A-5500SN Non-Slotted Cap Adaptor — Dielectric

- A basic dielectric face shield hard hat adaptor bracket
- Curved injection molded channel fits over the hard hat bill
- Features adjustable rubber cord headband that stretches around the cap crown for a secure fit
- Features three easy-to-swivel lock mounting pins for universal windows
- Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 14505 | 3000447 | Cap Style (Regular Brim) | Universal Windows | 12 |

Model 337 Non-Slotted Cap Adaptor — Dielectric

- A popular style dielectric face shield hard hat adaptor bracket
- Curved injection molded channel fit over the hard hat brim
- Features adjustable rubber strap headband that stretches around the cap crown for a secure fit
- Features five easy-to-swivel lock mounting pins for universal windows
- $\bullet~$ Attaches to SC-6, Sentry III®, Charger®, and many other hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------------|-------------------|-----------|
| 14946 | 3002443 | Cap Style (Regular Brim) | Universal Windows | 12 |

FACE SHIELD BRACKETS FOR FULL BRIM NON-SLOTTED HARD HATS (WIDE BRIM)

- Jackson offers two styles of face shield brackets for full brim hard hats
- Featuring curved metal channels that fit over the hard hat brim

Model H Cap Adaptor

- Vertical lock-in eliminates face shield creep
- Curved metal channels fit over the hard hat brim
- Brackets feature durable expandable spring tensioner self adjusts
- Features three easy-to-swivel lock mounting pins for universal windows
- Attaches to Blockhead and many other full brim hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------|-------------------|-----------|
| 14393 | 3000038 | Full Brim | Universal Windows | 24 |

Model 37 Cap Adaptor

- Vertical lock-in eliminates face shield creep
- Curved metal channels fit over the hard hat brim
- Brackets feature durable expendable spring tensioner self adjusts
- Features five easy-to-swivel lock mounting pins for universal windows
- Attaches to Blockhead and many other full brim hard hat brands

| PRODUCT NO. | Old Code | Fits Hard Hat Type | Fits Windows | Case Qty. |
|-------------|----------|--------------------|-------------------|-----------|
| 14945 | 3002442 | Full brim | Universal Windows | 12 |







MADE IN USA

MADE IN

USA

MADE IN

USA









sellstrom.



S61602





S61600



S61601





FACE SHIELDS — HARD HAT ADAPTOR BRACKETS

Face Shield Brackets for Non-Slotted Hard Hats

- Heavy-duty aluminum face shield bracket adaptors
- Brackets feature expandable spring tensioner self adjusts
- Two bracket styles:
 - S61602 fits most wide brim hard hats
 - S61900 fits most cap style hard hats
- Three positive lock positions: down, 45 and 90 degree up
- Swivel-locking pins conveniently mount windows to bracket
- Universal bracket pin pattern is designed to accommodate most universal window brands

| PRODUCT NO. | Fits Hard Hat Type | Fits Windows |
|-------------|--------------------|-------------------|
| \$61602 | Wide Brim | Universal Windows |
| S61900 | Cap Style | Universal Windows |

FACE SHIELDS — HARD HAT ADAPTOR BRACKETS — DIELECTRIC

- Dielectric made entirely of non-conductive materials
- Ideal for arc flash and electrical work
- Brackets fit most cap style hard hat brims
- Three positive lock positions: down, 45 and 90 degree up
- Swivel-locking pins conveniently mount windows to bracket
- Universal bracket pin pattern is designed to accommodate most universal window brands

Face Shield Brackets for Non-Slotted Hard Hats — Dielectric

- Bracket features expandable rubber tensioner self adjusts
- For non-slotted hard hats

| PRODUCT NO. | Fits Hard Hat Type | Fits Windows |
|-------------|--------------------|-------------------|
| \$61600 | Cap Style | Universal Windows |
| S61601 | Full Brim | Universal Windows |

Face Shield Brackets for Slotted Hard Hats — Dielectric

- Bracket features universal hard hat slot adaptor
- For slotted cap style hard hats

| PRODUCT NO. | Fits Hard Hat Type | Fits Windows |
|-------------|--------------------|-------------------|
| S61610 | Cap Style | Universal Windows |

UNIVERSAL SLOTTED HARD HAT ADAPTOR — DIELECTRIC

• Exclusive universal slotted hard hat adaptor makes mounting of Sellstrom face shields and/or welding helmets to slotted hard hats simple and easy



- Designed to fit Sellstrom's DP4, 380, and 390 Series face shields and 280, 290, Titan, and Smartweld welding helmets
- Dielectric made entirely of non-conductive materials
- Provides an overall secure and tight mount

| PRODUCT NO. | Description | Fits Windows |
|-------------|------------------------------------|--------------------------------|
| S61970 | Universal Slotted Hard Hat Adaptor | DP4, 280, 290, 380, 390 Series |

EXCLUSIVE!

Hard Hat Interchange System

The All-In-One Safety Solution. Injuries can happen in a split second. Now it's easy to stay protected with the Jackson Safety® Hard Hat Interchange System. It lets you add, remove, or switch between your face shield or welding helmet, without removing your head protection.

In accordance with ANSI Z87.1, the system was designed to protect against multiple combinations of hazards. Remain safe, productive, and compliant with the Hard Hat Interchange System. It's worker preferred and safety manager enforced.

- Quickly switch between face shields and welding helmets without removing hard hats
- Meets ANSI standards when PPE products are used separately or combined
- Hear the audible click Know your PPE is assembled correctly without the need for visual inspection
- One-button action provides quick release
- Vertical lock-in eliminates the annoyance of helmet creep
- HHIS headgear system comes fully assembled and ready to use
- Made from lightweight polypropylene
- Dielectric—Keeps your hard hat Class E rated!

| | CODE | Description | Case Qty. |
|---------------------|-------|---|--------------|
| | 39477 | HHIS Master Kit contains all components necessary to mount welding helmets and face shields to your hard hat | 6 |
| | 38423 | Replacement HHIS kits for 14225/14235/14238 QUAD 500™ | 6 |
| | 38424 | Replacement HHIS kits for 14202/14203 MAXVIEW™ and 14260/14262 F4XP | 6 |
| 38 | 38425 | HHIS Face Shield Kit contains all components necessary to mount face shields to your hard hat | 6 |
| Helmet not included | 38426 | HHIS Welding Helmet Kit contains all components necessary to mount welding helmets to your hard hat | 6 |
| 98 | 39476 | Replacement mounting brackets for SC-6 series hard hats | 6 |

Look for the Hard Hat Interchange System (HHIS) on these new Jackson products:



MAXVIEW™



14202, 14203

Quad 500™



14225, 14235, 14238

JACKSON®



It's as Easy as 1, 2, 3!



Attach HHIS hard hat mounting bracket (with exclusive quick release button) to cap style slotted hard hat.



Attach HHIS hard hat mounting blades to any Jackson face shield or welding helmet product.



Pushing the HHIS quick release button allows fast and easy attachment/ removal of face protection without ever removing your hard hat!





- Used in conjunction with protective eyewear, Jackson Safety® face shields
 provide a high degree of on-the-job protection for heat applications as
 well as grinding, flying debris, splash protection, and more
- All Jackson Safety® face shields meet ANSI Z87.1 Standards when used with any Jackson Safety® headgear (except for #28765)
- Universal bracket pin pattern is designed to accommodate most universal window brands including Kedman, Crews, Wilson, North, Jackson, and Sellstrom

| F60 | Wire Face Shields |
|-----|------------------------------------|
| F50 | Polycarbonate Special Face Shields |
| F40 | Propionate Face Shields |
| F30 | Acetate Face Shields |
| F20 | Polycarbonate Face Shields |
| F10 | PETG Face Shields |

MATERIAL TYPES

LENS TINTS

| PETG | A low-cost, recyclable option, ideal for general debris and splash protection |
|---------------|--|
| Polycarbonato | • Promium impact protection |

Premium impact protection

• Good performance against heat

• Excellent cold flexibility

• Excellent clarity

• Robust combination of weight and strength

• Excellent cold flexibility

• Scratch and chemical resistant

• Optimum clarity

Propionate • Lightweight and chemical resistant

• Wear with face shield to dissipate heat

• Ideal for flying-debris applications

Air flow for comfort

Allows for maximum visible-light transmission.

IRUV

Clear

Worn for applications and in environments where others are performing welding tasks such as torch brazing, torch soldering, gas welding, and oxygen cutting. Available in Shades 3.0 and 5.0.

SPECIAL TINTS

Enhances vision and reduces glare by blocking light transmission. Available in light, medium, and dark green tints, as well as aluminum, copper, and gold coated to deflect heat in high-heat applications.

WARNING: APPLICATIONS & SAFETY

Face shields do not provide unlimited eye and face protection — primary eye protection (safety eyewear or goggles) must be worn.

| Recommended Applications | F10 PETG | F30 Acetate & F40 Propionate | F20 Polycarbonate & F50 Polycarbonate Special | F60 Wire Mesh |
|--------------------------------|-------------|------------------------------|---|------------------|
| Applications | GOOD | BETTER | BEST | |
| Light industrial manufacturing | • | • | • | |
| Cutting or grinding metal | | | ◆ (IRUV only) | |
| Cutting wood | | | • | • |
| Splash (general) | • | • | • | |
| Impact | | • | • | |
| High-heat applications | | | • | • |
| Landscaping | • | • | • | • |
| Food processing | • | • | • | |
| Scratch resistance | | • | | |
| High impact | | | • | |





F10 PETG Face Shields

Old Code

3005392

NEW!

NEW!

3005399

3005382

3029190

3029191

PRODUCT

NO.

28765*

28764**

29107

29104

29101

28962

28963




| Meets | ANSI Z87.1 St | andards | | VI TEM |
|------------|---------------|---------|--|-------------|
| Case Count | Shape | Bound | Compatible with Hard Hat Interchange System | MADE IN USA |
| 36 | N | Unbound | | • |
| 96 | N | Unbound | | • |
| 96 | E | Unbound | • | • |
| 100 | F | Unhound | | |

Unbound

Bound

Unbound

For more information about the Hard Hat Interchange System, refer to page 105.





Shade

Clear

Clear AF


Clear AF

Clear

Medium Green

Clear

Clear



50

50

D

D

Dimensions

(L" x W" x T") 6" x 15.5" x .040"*

8" x 15.5" x .035"

8" x 15.5" x .035"

8" x 15.5" x .040"

8" x 15.5" x .040"

9" x 15.5" x .040"

9" x 15.5" x .040"

F20 Polycarbonate Face Shields



All models meet or exceed ANSI Z87.1+ high impact standards. Models 29087, 29106, and 30706 are CSA certified to CAN/CSA Z94.3 standards when combined with Jackson models 14260 F4XP headgear, or when combined with an SC-6 hard hat and 38425 HHIS hard hat adaptor.

| PRODUCT NO. | Old Code | Shade | Dimensions (L" x W" x T") | Case Count | Shape | Bound | Compatible with Hard Hat Interchange System | MADE IN |
|----------------|----------|--------------|------------------------------|------------|-------|---------|--|---------|
| 30706* | 3005372 | Clear | 8" x 15.5" x .040" | 36 | E | Unbound | • | • |
| 29097* | 3005373 | Medium Green | 8" x 15.5" x .040" | 36 | Е | Unbound | • | • |
| 29100* | 3005379 | Dark Green | 8" x 15.5" x .040" | 36 | E | Unbound | • | • |
| 29096* | 3005371 | Clear | 8" x 15.5" x .040" | 25 | Е | Bound | • | • |
| 29099* | 3005378 | Clear | 8" x 15.5" x .040" | 36 | F | Unbound | • | • |
| 29062 * | 3000449 | Clear | 8" x 15.5" x .040" | 12 | T | Unbound | • | • |
| 29087* | 3002832 | Clear | 8" x 15.5" x .060" (Molded) | 12 | В | Unbound | • | |
| 29109* | 3009492 | Clear | 8" x 15.5" x .060" | 12 | Е | Unbound | • | • |
| 14132* | 3005375 | Clear | 8" x 15.5" x .060" | 36 (bulk) | E | Unbound | • | • |
| 29106* | NEW! | Clear | 9" x15.5" x .040" | 96 | D | Bound | • | • |
| 29057* | NEW! | Clear | 9" x 15.5" x .060" (Molded) | 12 | R | Unbound | • | • |
| 29103* | 3005385 | Clear | 9" x 19.25" x .060" | 36 | L | Unbound | • | • |
| 29098 | 3005377 | Clear | 10" x 20" x .040" | 36 | K | Unbound | • | • |
| <u></u> | | | | | | | | |

















*CSA Z94.3 Compliant ▲ Chin Cup

Table of Contents

^{*}Model 28765 does not meet ANSI Z87.1 standards due to limited coverage

^{**}Please note: 28764 and 28765 windows are designed specifically to fit on Jackson bump caps with face shield attachment.



F30 Acetate Face Shields

| | | | | | | | | NTERCHAN |
|--------------------|----------|--------------|------------------------------|------------|----------------|---------|--|----------|
| | | | | Meets | ANSI Z87.1 Sta | andards | | Veriet |
| CODE | Old Code | Shade | Dimensions (L" x W" x T") | Case Count | Shape | Bound | Compatible with Hard Hat Interchange System | MADE IN |
| 29078 ² | 3002806 | Clear | 8" x 12" x .040" | 24 | С | Bound | • | • |
| 29052 | 3000122 | Clear | 8" x 15.5" x .040" | 24 | E | Bound | • | • |
| 29053 | 3000123 | Medium Green | 8" x 15.5" x .040" | 24 | D | Bound | • | • |
| 29054 | 3000125 | Clear | 8" x 15.5" x .060" | 24 | E | Bound | • | • |
| 29060 | 3000411 | Clear | 9" x 15" x .040" | 24 | Р | Unbound | • | • |
| 29092 | NEW! | Clear | 9" x 15.5" x .040" | 35 | D | Unbound | • | • |
| 29079 | 3002808 | Clear | 9" x 15.5" x .040" | 24 | D | Bound | • | • |
| 29091 | 3002848 | Clear | 9" x 15.5" x .040" | 50 (Bulk) | D | Bound | • | • |
| 29082 | 3002817 | Light Green | 9" x 15.5" x .040" | 12 | D | Bound | • | • |
| 29090 | 3002845 | Dark Green | 9" x 15.5" x .040" | 50 | D | Bound | • | • |
| 29083 | 3002826 | Clear | 9" x 19.5" x .040" | 12 | 1 | Unbound | • | • |
| 29056 | 3000136 | Clear | 9" x 19.5" x .040" | 24 | 0 | Unbound | • | • |
| 14445 | 3000146 | Clear | 9" x 20" x .040" | 12 | Q | Unbound | • | • |















F40 Propionate Face Shields — Molded

| | | | | Meets | ANSI Z87.1 St | andards | | V ₂₅ TEP |
|-------|----------|------------|------------------------------|------------|---------------|---------|--|---------------------|
| CODE | Old Code | Shade | Dimensions (L" x W" x T") | Case Count | Shape | Bound | Compatible with Hard Hat Interchange System | MADE IN USA |
| 29084 | 3002830 | Clear | 9" x 15.5" x .060" | 12 | G | Unbound | • | • |
| 29089 | 3002843 | Clear | 9" x 15.5" x .060" | 50 (Bulk) | G | Unbound | • | • |
| 29086 | 3002831 | Dark Green | 9" x 15.5" x .060" | 12 | G | Unbound | • | • |
| 28766 | 3000175 | Clear | 10" x 20" x .060" | 1 | Н | Unbound | • | • |





F50 Polycarbonate Special Face Shields — Molded — Premium Clarity & Impact Protection

All models meet or exceed ANSI Z87.1+ high impact standards. Model 29080 is CSA certified to CAN/CSA Z94.3 standards when combined with Jackson models 14260 F4XP headgear, or when combined with an SC-6 hard hat and 38425 HHIS hard hat adaptor.

| CODE | Old Code | Shade | Dimensions (L" x W" x T") | Case Count | Shape | Bound | Compatible with Hard Hat Interchange System |
|--------|----------|----------|------------------------------|------------|-------|---------|--|
| 26262* | 3002813 | IRUV 3.0 | 8" x 15.5" x .060" | 12 | В | Unbound | • |
| 29080* | 3002810 | IRUV 5.0 | 8" x 15.5" x .060" | 12 | В | Unbound | • |
| 28633* | 3002838 | IRUV 5.0 | 8" x 15.5" x .060" | 50 (Bulk) | В | Unbound | • |
| 29058 | NEW! | IRUV 3.0 | 9" x 15.5" x .060" | 12 | R | Unbound | • |
| 29059 | NEW! | IRUV 5.0 | 9" x 15.5" x .060" | 12 | R | Unbound | • |
| 28634* | 3000162 | Gold | 10" x 20" x .060" | 1 | Н | Unbound | • |
| 29075 | NEW! | Alum | 10" x 20" x 060" | 12 | R | Unbound | • |
| 29085 | NEW! | Copper | 10" x 20" x 060" | 12 | R | Unbound | • |
| 29088 | NEW! | Gold | 10" x 20" x 060" | 12 | R | Unbound | • |







Aluminum – Basic heat deflection/protection Copper – Medium-to-high heat deflection/protection Gold – High heat deflection/protection

Chin Cup

² Face Shield 29078 does not meet ANSI Z87.1 splash protection requirements when used with headgear 29076



F60 Wire Mesh Face Shields

| | | | Meets ANSI Z87.1 Standards | | | | |
|--------|----------|-------|------------------------------|------------|-------|-------|-----------------|
| CODE | Old Code | Shade | Dimensions (L" x W" x T") | Case Count | Shape | Bound | Other |
| 29102³ | 3005383 | Mesh | 6.5" x 15.5" x .020" | 30 | N | Bound | 6513 Mesh Steel |
| 29055* | 3000127 | Mesh | 8" x 15.5" x .020" | 12 | С | Bound | 815 Mesh Steel |
| 29081* | 3002812 | Mesh | 9" x 15.5" x .016" | 12 | E | Bound | 40 Mesh Steel |







*CSA Z94.3 Compliant

Wire mesh face shields are not splash protectors. Not intended for high-impact protection. Apply over a face shield to dissipate heat.

Safe 2 Protection System

- System is designed for slotted caps
- Face shield bracket features an encapsulated stainless steel spring which ensures that the face shield stays in the selected position
- Face shields are shaped to follow the contours of the face
- Hard hat, bracket, face shield, and ear muffs all sold separately


| CODE | Old Code | Description | Case Count |
|-------|----------|--|------------|
| 16797 | 3005410 | Face Shield/Ear Muff Bracket (only) | 1/Box |
| 25973 | 3005401 | Clear High Impact Polycarbonate Window – Bound | 25/Box |
| 16800 | 3005415 | Face Shield – Nylon Mesh | 1/Box |
| 16799 | 3005413 | Face Shield – Steel Mesh | 1/Box |
| 20776 | 3015091 | Capmount Ear Muffs – Orange NRR 22 | 1/Box |
| 20777 | 3015092 | Capmount Ear Muffs – Red NRR 25 | 1/Box |
| 20778 | 3015093 | Capmount Ear Muffs – Black NRR 27 | 1/Box |



New! Jackson Safety® F4XP Universal Crown with 370 Speed Dial™ Ratcheting Headgear — Simply the

14262





(14262) F4XP Kit features premium 8" x 15.5" x .060" molded polycarbonate window (29087)

Exclusive quick-change install and removal system ensures fast and efficient window changes



Speed Dial 370™ headgear offers the fastest, easiest, and most efficient ratcheting headgear system in the industry

Hard Hat Interchange system available



³ Fits only with headgear codes 14381 and 29051.

sellstrom_®



S37040



S37701



- Sellstrom offers a wide range of universal pin pattern windows to meet your every need
- All models meet ANSI Z87.1+ high-impact standards



| PRODUCT NO. | Dimensions (L" x W" x T") | Description | Compatible with Hard Hat Interchange System |
|-------------|------------------------------|--|--|
| \$37040 | 8" x 16" x .040" | Clear Molded Acetate Window – Anti-Fog | • |
| \$37050 | 8" x 16" x .060" | Shade 5 IR Acetate Window | • |
| \$37600 | 8" x 15.5" x .040" | Clear Aluminum Bound Window | • |
| \$37601 | 8" x 15.5" x .040" | Clear Polycarbonate Window | • |
| \$37701 | 9" x 15" x .060" | Clear Molded Spherical PC Window – V-Shape | • |

FACE SHIELDS — UNIVERSAL PIN MOUNT WINDOWS/VISORS

Please note: These universal windows mount on all Sellstrom and Jackson universal pin mount window systems, such as F4XP, 170-SB, Model K, and 301 Series headgear, as well as all hard hat adapters

FACE SHIELD WINDOWS — FIBRE-METAL®

- Sellstrom carries replacement windows for three Fibre-Metal® face shield models: 4118, 4178, and 4199
- Meet ANSI Z87.1+ high impact standards

| PRODUCT NO. | Dimensions (L" x W" x T") | Description | Fits Fibre Metal Crown |
|-------------|------------------------------|---------------------|------------------------|
| \$37606 | 8" x 11" x .040" | Clear Polycarbonate | 4118 |
| \$37607 | 8" x 16.5" x .040" | Clear Polycarbonate | 4178 |
| \$37608 | 9.75" x 19" x .040" | Clear Polycarbonate | 4199 |

Fibre-Metal® is a registered trademark of Honeywell.



FACE SHIELDS — SPLASH PROTECTION

MFS-320 Reusable Splash Face Shield

- Ideal for splash protection against liquids and body fluids for healthcare workers, first responders, and in food processing applications
- Safeguards against splash and dust in a wide range of general use applications
- Easy-to-install/replace window quickly snap on or off the headband for maximum convenience
- Extra-large full face coverage for superior protection check and compare!
- Reusable design significantly reduces landfill waste and saves on disposal costs!
- Window features an anti-fog coating not found on most other face shields keeps your vision clear and safe!
- Baseball cap-style pinlock head strap ensures quick and easy adjustments —
 just set it and forget it!
- Window and headband made with recyclable materials and are both replaceable
- A premium yet cost-effective face shield solution a Jackson Safety exclusive
- Not designed for use in high impact applications!
- Meets ANSI Z87.1 D3 standards

| PRODUCT NO. | Window | (L" x W" x T") | Shape | Tint | Headband | Sweatband | Case Qty. |
|-------------|-----------------|------------------|---------------|-------|-----------------|-----------------------|-----------|
| 14350 | PET Anti-Fog | 9" x 14" x .020" | E | Clear | LDPE Pinlock | #1 Density PU Foam | 24 |
| V | Swe | eatband Replac | ement Product | No. | | | |
| | 14356 (24/case) | | | | | | |
| | | | | | | | |

Manufactured in an FDA-registered facility and FDA listed. Packaging displays a health industry bar code.

| PRODUCT NO. | UDI Number |
|-------------|--------------|
| 14350 | +B954143501+ |

 $Sure Werx\ does\ not\ warrant\ that\ use\ of\ this\ product\ will\ prevent\ infection\ by\ viruses\ or\ microorganisms\ and\ assumes\ no\ liability.$







JACKSON®

14350












LEGENDARY STYLE & PERFORMANCE!

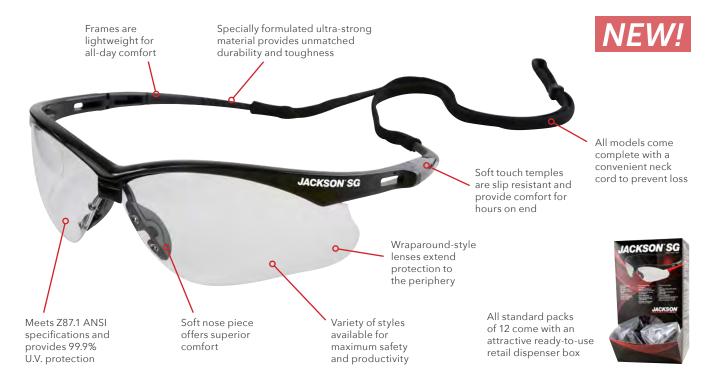

JACKSON® SG SAFETY GLASSES — PREMIUM

JACKSON® SG Series Safety Glasses

- Introducing the all new JACKSON® SG series, a premium eye protection product offering outstanding fit, comfort, protection, style, and durability
- Specially designed to offer maximum eye coverage and protection, incorporating a variety of lens shades and coatings
- Made with premium virgin polycarbonate high impact, optically correct wrap style lenses, providing 99.9% UV protection
- Soft temples are curved inwards from front to back to ensure a super comfortable, slip-resistant fit
- As an added advantage, the temple tips are extremely flexible, further ensuring a snug fit while relieving any undue pressure to the user these glasses are extremely comfortable and stay on during use!
- Frames have been developed using a specially formulated ultra-flexible, ultra-strong base material that provides incredible durability, significantly reducing breakage check and compare!
- The lightweight frame includes a soft non-allergic nose pad for maximum comfort and fit
- Each safety glass comes complete with a convenient neck strap no more misplaced or lost glasses!
- Models 50000, 50001, 50002, 50004, 50006, 50010, 50040, 50041, 50042 are CSA certified to CAN/CSA Z94.3 standards
- Models 50000, 50002, 50004, 50005, 50006, 50008, 50009, 50010; 50040, 50041, 50042 CE certified
- Available in three styles framed, framed polarized, and frameless



Extreme Flexibility and Strength for Maximum Durability and Life!

SAFETY GLASSES — PREMIUM SERIES


NEW!

JACKSON® SG Series Safety Glasses — Framed

| PRODUCT NO. | Frame Color | Lens Color | Lens Coating | Pack Qty. | Case Qty. |
|-------------|-------------|----------------|-----------------------|-----------|-----------|
| 50000 | Black | Clear | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50001 | Black | Clear | Anti-Fog | 12/Box | 144 |
| 50002 | Black | Amber | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50003 | Black | Amber | Anti-Fog | 12/Box | 144 |
| 50004 | Black | Indoor/Outdoor | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50005 | Black | Blue Shield | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50006 | Black | Smoke Mirror | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50007 | Black | Smoke Mirror | Anti-Fog | 12/Box | 144 |
| 50009 | Black | Blue Mirror | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50011 | Blue | Light Blue | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50012 | Camo | Clear | Anti-Fog | 12/Box | 144 |
| 50013 | Camo | Amber | Anti-Fog | 12/Box | 144 |
| 50014 | Camo | Bronze | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50015 | Camo | Smoke | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50016 | Red | Smoke | Hardcoat Anti-Scratch | 12/Box | 144 |
| | | | | | |



50012

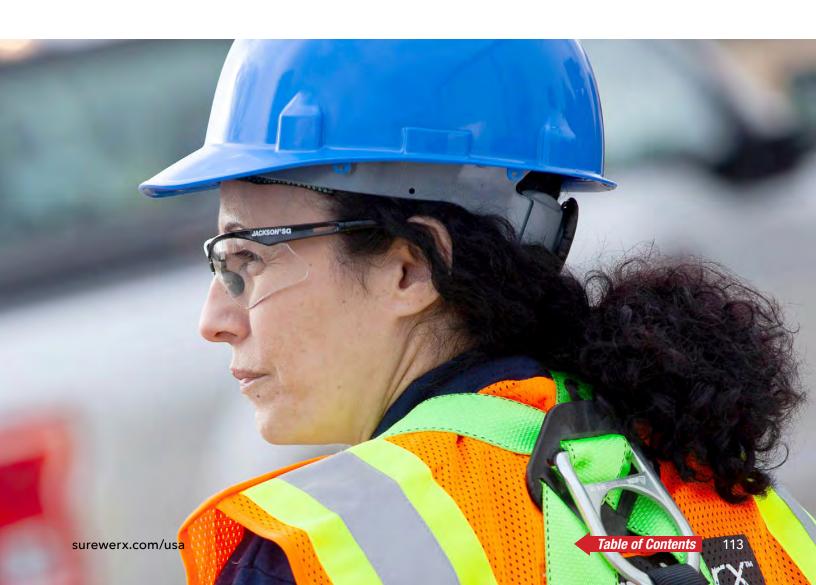





50010



50040



JACKSON® SG INFRARED

- Safeguards workers from "welder's flash"
- For use with torch soldering, brazing and cutting

| PRODUCT NO. | Frame Color | Lens Color | Lens Coating | Pack Qty. | Case Qty. |
|-------------|-------------|------------|-----------------------|-----------|-----------|
| 50008 | Black | IR 3.0 | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50010 | Black | IR 5.0 | Hardcoat Anti-Scratch | 12/Box | 144 |

JACKSON® SG READERS


• Ideal for those who need reading glasses and impact protection at the same time

| PRODUCT NO. | Frame Color | Lens Color | Lens Coating | Reader Strength | Pack Qty. | Case Qty. |
|-------------|-------------|------------|-----------------------|-----------------|-----------|-----------|
| 50040 | Black | Clear | Hardcoat Anti-Scratch | 1.5 | 12/Box | 144 |
| 50041 | Black | Clear | Hardcoat Anti-Scratch | 2.0 | 12/Box | 144 |
| 50042 | Black | Clear | Hardcoat Anti-Scratch | 2.5 | 12/Box | 144 |

JACKSON® SG+ Series Polarized Safety Glasses — Framed

• These glasses incorporate all of the same outstanding features of the JACKSON® SG Series but offer the added advantage of polarized lenses for ultimate viewing in bright conditions

| PRODUCT NO. | Frame Color | Lens Color | Lens Coating | Pack Qty. | Case Qty. |
|-------------|-------------|------------|-----------------------|-----------|-----------|
| 50017 | Brown | Brown | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50018 | Gunmetal | Smoke | Hardcoat Anti-Scratch | 12/Box | 144 |

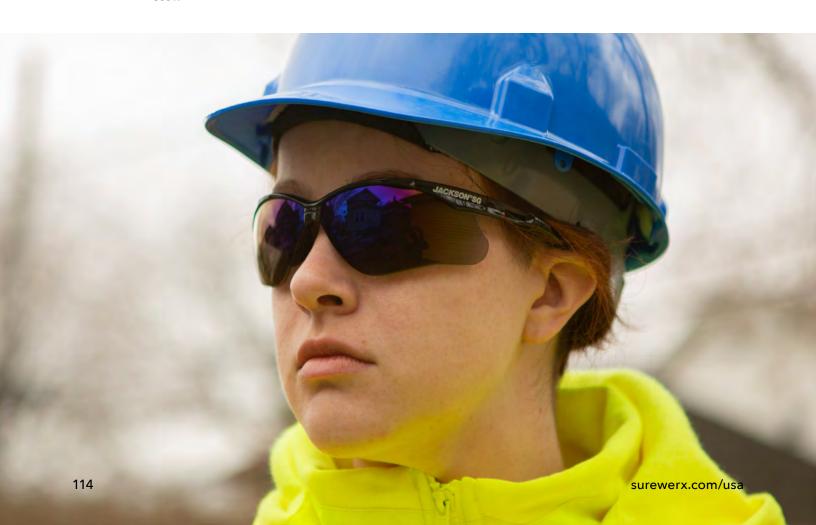



JACKSON® SGf Series Safety Glasses — Frameless

• Includes the same outstanding features as the Jackson SG but made with a frameless design for lighter weight and edge-to-edge vison

| | | | Lens Coating | Pack Qty. | Case Qty. |
|-------|----------|----------------|-----------------------|-----------|-----------|
| 50025 | Gunmetal | Clear | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50026 | Gunmetal | Clear | Anti-Fog | 12/Box | 144 |
| 50027 | Gunmetal | Indoor/Outdoor | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50028 | Gunmetal | Smoke | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50029 | Gunmetal | Blue Mirror | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50030 | Gunmetal | IR 5.0 | Hardcoat Anti-Scratch | 12/Box | 144 |
| 50031 | Camo | Bronze | Hardcoat Anti-Scratch | 12/Box | 144 |



Table of Contents

50031

sellstrom.



SAFETY GLASSES — PREMIUM SEALED



- Sealed safety glasses offer the best of both worlds the comfort and fit of a safety glass with goggle-like protection
- Features a fire-resistant closed cell foam insert that seals the glass to your face
- Provide maximum protection in dusty, windy conditions and wherever airborne particles are present
- Foam insert features top and bottom vent ports allowing superior air circulation
- Curved, custom molded high-impact polycarbonate lenses provide exceptional panoramic views
- Made with premium virgin polycarbonate high-impact lenses
- Lenses are specially coated with Sellstrom's premium Sta-Clear® anti-fog/anti-scratch washable lens treatment for maximum performance, durability, and life
- Virtually 100% fog free for optimum operator safety
- Provide 99.9% UV protection
- All models meet or exceed ANSI Z87.1+ high impact standards, CSA certified to CAN/CSA Z94.3 standards and model XPS502 is tested to the U.S. Military Standard MIL-PRF-31013 safety requirement of 640 feet per second

FOG FREE!

SAFETY GLASSES — PREMIUM SEALED

XPS502 Sealed Safety Glasses

- Features flexible, soft temples that are permanently attached to the frame using a heavy-duty ratcheting (up or down) temple adjustment hinge
- Allows the user to adjust temples for maximum comfort and protection
- Includes a cloth strap that conveniently attaches to the temples
- Detachable strap can be easily removed/re-attached as desired
- Ballistic rated meets **US Military Standard MIL-PRF-31013** requirement
- 12/box, 144/case

| PRODUCT NO. | Color | Tint | Lens Coating | Temple | Strap |
|-------------|--------------|-------|---------------------------------|--------|----------|
| \$71910 | Black/Orange | Clear | Sta-Clear® Anti-Fog/Hard Coated | Soft | FR Cloth |
| \$71911 | Black/Orange | Smoke | Sta-Clear® Anti-Fog/Hard Coated | Soft | FR Cloth |
| \$71912 | Black/Orange | I/O | Hard Coated | Soft | FR Cloth |

XPS530 Sealed Safety Glasses

- The XPS530 comes standard with both detachable soft co-molded temples and a fire resistant cloth strap which are easily interchangeable
- Outstanding style, fit, comfort, and safety
- 12/box, 144/case

| PRODUCT NO. | Color | Tint | Lens Coating | Temple | Strap |
|-------------|--------------|-------|---------------------------------|---------|----------|
| \$70000 | Yellow/Black | Clear | Sta-Clear® Anti-Fog/Hard Coated | Co-mold | FR Cloth |
| \$70001 | Yellow/Black | Smoke | Sta-Clear® Anti-Fog/Hard Coated | Co-mold | FR Cloth |
| \$70002 | Yellow/Black | I/O | Hard Coated | Co-mold | FR Cloth |

XPS530 safety glasses include both detachable temple arms and straps.



Permanent temple arms, removable strap

BEST



Heavy duty ratcheting temple adjustment hinge (up or down)




S70000



S70001

Model \$70000 shown with fire-resistant rated strap (included).

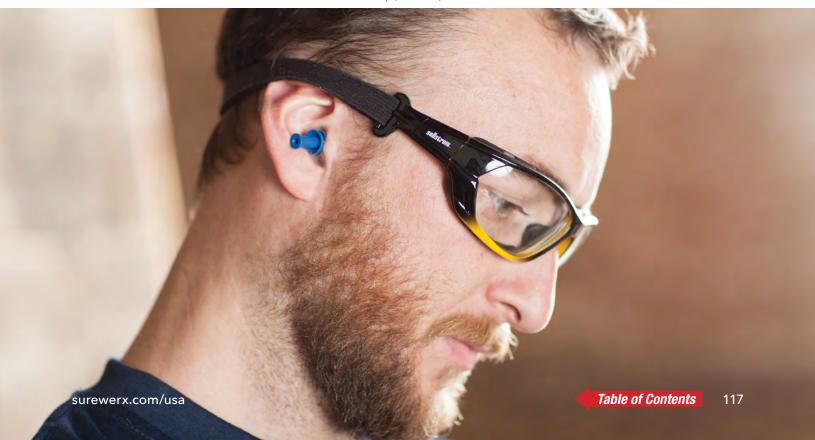

sellst.rom.



SAFETY GLASSES — PREMIUM SERIES

FOG FREE!

- Sellstrom offers a wide range of super premium, high quality safety glasses
- Rich in style, comfort, fit and safety
- Each model has been designed to exceed the needs of the most demanding user
- Made with premium virgin polycarbonate high impact lenses
- Lenses are specially coated with Sellstrom's premium Sta-Clear® anti-fog/anti-scratch washable lens treatment for maximum performance, durability and life
- Virtually 100% fog free for optimum operator safety
- Provide 99.9% UV protection
- All models meet or exceed ANSI Z87.1+ high impact standards, CSA certified to CAN/CSA Z94.3 standards and tested to the U.S. Military Standard MIL-PRF-31013 safety requirement of 640 feet per second



S72000



S72001

XP410 Safety Glasses

- $\bullet~$ The XP410 offers feather light frames, great style, maximum comfort & fit
- So light, you won't even remember you have them on!
- High-impact optically correct wrap style unitary PC lens offers superior coverage
- Stylish, ultra-thin black/green co-molded temples
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal
- Soft, co-molded above-the-eye band provides superior eye coverage
- Soft, co-molded nose piece with flexible fingers ensures maximum comfort

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty. | Case Qty. |
|-------------|--------------|-----------|---------------------------------|-----------|-----------|
| \$72000 | Black /Green | Clear | Sta-Clear® Anti-Fog/Hard Coated | 12/Box | 144 |
| \$72001 | Black /Green | Smoke | Sta-Clear® Anti-Fog/Hard Coated | 12/Box | 144 |
| \$72002 | Black /Green | 1/0 | Hard Coated | 12/Box | 144 |

SAFETY GLASSES — PREMIUM SERIES

XP420 Safety Glasses

- The XP420 offers a sporty, stylish heavy duty frame and temple design
- High-impact optically correct wrap style unitary PC lens offers superior coverage
- Soft, flexible temples with ribbed tips are curved inwards to ensure comfortable, slip-resistant fit
- Soft nose piece offers all day comfort

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty. |
|-------------|--------------|-----------|---------------------------------|----------|-----------|
| \$72100 | Black | Clear | Sta-Clear® Anti-Fog/Hard Coated | 12/Box | 144 |
| \$72101 | Black | Smoke | Sta-Clear® Anti-Fog/Hard Coated | 12/Box | 144 |
| \$72102 | Black | 1/0 | Hard Coated | 12/Box | 144 |

*** BEST



sellstrom.



S72101

XP450 Safety Glasses

- The XP450 is our sportiest looking safety glass
- Edgy, sleek and modern co-molded temples offer outstanding style and comfort
- High-impact optically correct wrap style two-piece PC lenses offer superior coverage
- Lenses are mounted to the frame with a ventilation space, minimizing fogging
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal
- Soft nose piece offers all day comfort

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty. |
|-------------|--------------|-----------|---------------------------------|----------|-----------|
| \$72300 | Black/Red | Clear | Sta-Clear® Anti-Fog/Hard Coated | 12/Box | 144 |
| \$72301 | Black/Red | Smoke | Sta-Clear® Anti-Fog/Hard Coated | 12/Box | 144 |
| \$72302 | Black/Red | 1/0 | Hard Coated | 12/Box | 144 |



S72300



S72301

XP460 Safety Glasses

- The XP460 offers a sporty, stylish heavy duty frame and temple design
- Our only full frame premium safety glass
- High-impact optically correct two-piece PC lenses offer superior coverage
- Stylish black/green co-molded temples and soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty. |
|-------------|--------------|-----------|---------------------------------|----------|-----------|
| \$72400 | Black /Green | Clear | Sta-Clear® Anti-Fog/Hard Coated | 12/Box | 144 |
| \$72401 | Black /Green | Smoke | Sta-Clear® Anti-Fog/Hard Coated | 12/Box | 144 |
| \$72402 | Black/Green | 1/0 | Uncoated | 12/Box | 144 |



S72400



S72401

sellst.rom.



S71100



S71101

Up/down three-position ratcheting temples



S71200



S71201



SAFETY GLASSES — ADVANTAGE PLUS SERIES

- Advantage Plus safety glasses offer additional features over our Advantage Series products, providing the user with increased comfort and fit
- All glasses are made using virgin polycarbonate lenses
- Provide 99.9% UV protection
- Lenses feature an anti-scratch hard coating
- Ideal for those applications where safety, comfort, fit, and affordability are of primary importance

**

BETTER

 All models meet or exceed ANSI Z87.1+ high impact standards, CSA certified to CAN/CSA Z94.3 standards and tested to the U.S. Military Standard MIL-PRF-31013 safety requirement of 640 feet per second (except XM300 Series)

XM300 Safety Glasses

- The XM300 safety glass is lightweight, stylish, comfortable and affordable
- High impact optically correct wrap style unitary PC lens offers superior coverage
- Stylish black/green co-molded temples and soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty. | Case Qty. |
|-------------|--------------|-----------|--------------|-----------|-----------|
| \$71100 | Black/Green | Clear | Hard Coated | 12/Box | 144 |
| \$71101 | Black/Green | Smoke | Hard Coated | 12/Box | 144 |
| \$71102 | Black/Green | I/O | Hard Coated | 12/Box | 144 |

XM310 Safety Glasses

- The XM310 safety glass is lightweight, stylish, comfortable and very affordable
- High impact optically correct wrap style unitary PC lens offers superior coverage
- Molded above-the-eye band provides superior coverage
- Stylish black/orange co-molded temples and soft nose piece offers all day comfort
- Up/down three-position ratcheting temples allows user to adjust for maximum fit
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty. | Case Qty. |
|-------------|--------------|-----------|--------------|-----------|-----------|
| \$71200 | Black/Orange | Clear | Hard Coated | 12/Box | 144 |
| \$71201 | Black/Orange | Smoke | Hard Coated | 12/Box | 144 |
| \$71202 | Black/Orange | 1/0 | Hard Coated | 12/Box | 144 |
| 571203 | Black/Orange | Amber | Hard Coated | 12/Box | 144 |

SAFETY GLASSES – ADVANTAGE PLUS SERIES

XM320 Safety Glasses

- The XM320 offers a sporty, stylish heavy duty frame and temple design
- High impact optically correct unitary PC lens offers integrated side panel incredible front and side eye coverage
- Stylish flat black and orange co-molded temples are soft and flexible
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Soft nose piece offers all day comfort

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty. |
|-------------|--------------|-----------|--------------|----------|-----------|
| \$71400 | Black/Orange | Clear | Hard Coated | 12/Box | 144 |
| \$71401 | Black/Orange | Smoke | Hard Coated | 12/Box | 144 |
| \$71402 | Black/Orange | 1/0 | Hard Coated | 12/Box | 144 |

XM330 Safety Glasses

- The XM330 safety glass is lightweight, stylish, comfortable and very affordable
- Our most popular mid-range safety glass!
- High impact optically correct wrap style unitary PC lens offers superior coverage
- Soft, flexible temple tips and soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty. |
|-------------|--------------|-----------|--------------|----------|-----------|
| \$73601 | Clear/Black | Clear | Hard Coated | 12/Box | 144 |
| \$73611 | Amber/Black | Amber | Hard Coated | 12/Box | 144 |
| \$73621 | Smoke/Black | Smoke | Hard Coated | 12/Box | 144 |
| \$73631 | Clear/Black | 1/0 | Hard Coated | 12/Box | 144 |

XM340 Safety Glasses (Old PT9)

- The XM340 safety glass is lightweight, stylish & comfortable
- High impact optically correct wrap style dual PC lenses offer superior coverage
- Lenses are mounted to the frame with a ventilation space, minimizing fogging
- Soft rubberized temple tips and soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty. | Case Qty. |
|-------------|--------------|-----------|--------------|-----------|-----------|
| \$74201 | Smoke/Smoke | Clear | Hard Coated | 12/Box | 144 |
| \$74241 | Smoke/Smoke | 1/0 | Hard Coated | 12/Box | 144 |
| \$74271 | Smoke/Smoke | Smoke | Hard Coated | 12/Box | 144 |

sellstrom_®



** BETTER



S71401



S73601



S73611



S73621



S74201



S74271

sellst.rom.



S70701



S70711



S70721



S73401



S73421



S73471



SAFETY GLASSES — ADVANTAGE SERIES

- Sellstrom offers a wide range of affordable safety glasses under the Advantage Series program
- All glasses are made using virgin, unitary polycarbonate lenses
- Provide 99.9% UV protection
- Ideal for construction, shop, and general eye protection applications

* GOOD

X300 Safety Glasses

- The X300 style is one of the most popular selling safety glasses in North America
- Lightweight, comfortable and very affordable
- Lens features an anti-scratch hard coating
- All X300 safety glasses meet ANSI Z87.1+ high impact standards and are CSA certified to CAN/CSA Z94.3 standards

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty |
|-------------|--------------|-----------|--------------|----------|----------|
| \$70701 | Clear | Clear | Hard Coated | 12/Box | 144 |
| \$70702 | Clear | Clear | Anti-Fog | 12/Box | 144 |
| \$70711 | Amber | Amber | Hard Coated | 12/Box | 144 |
| \$70721 | Smoke | Smoke | Hard Coated | 12/Box | 144 |
| \$70731 | Clear | 1/0 | Hard Coated | 12/Box | 144 |

X330 Safety Glasses (Old Firebird)

- The X330 style is one of the most popular selling safety glasses in North America
- Lightweight, comfortable and very affordable
- Lens features an anti-scratch hard coating
- Soft rubberized temple tips ensure superior comfort and fit
- All X300 safety glasses meet ANSI Z87.1+ high impact standards and are CSA certified to CAN/CSA Z94.3 standards

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty |
|-------------|--------------|-------------|--------------|----------|----------|
| \$73401 | Clear | Clear | Hard Coated | 12/Box | 144 |
| \$73402 | Clear | Clear | Anti-Fog | 12/Box | 144 |
| \$73421 | Amber | Amber | Hard Coated | 12/Box | 144 |
| \$73471 | Smoke | Smoke | Hard Coated | 12/Box | 144 |
| \$73481 | Smoke | Blue Mirror | Hard Coated | 12/Box | 144 |

X350 Safety Glasses (OTG)

- Lightweight, comfortable and affordable
- Sleek, modern look offers front, side and above/below-the-eye protection
- Designed to fit over most medium sized prescription eyewear (OTG)
- Comfortable nose bridge
- Ideal as a visitors spec as well as for everyday eye protection
- Meets ANSI Z87.1+ high impact standards and are CSA certified to CAN/CSA Z94.3 standards
- Tested to U.S. Military Standard MIL-PRF-31013 safety requirement of 640 feet per second

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty |
|-------------|--------------|-----------|--------------|----------|----------|
| \$79100 | Clear | Clear | Hard Coated | 12/Box | 144 |

SAFETY GLASSES — ADVANTAGE SERIES

Sebring[™] Safety Glasses

- Classic one-piece molded lens offers excellent front/side protection
- Lightweight, comfortable and very affordable
- Arms are extendable for maximum fit and comfort
- S73801 and S73802 offer same features but with a smaller frame for narrow faces
- Meets ANSI Z87.1+ high impact standards and the following are CSA certified to CAN/CSA Z94.3 standards: S73801, S76301, and S76371

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty |
|-------------|---------------------|-----------|--------------|----------|----------|
| \$73801 | Black (small frame) | Clear | Hard Coated | 12/Box | 144 |
| \$73802 | Blue (small frame) | Clear | Hard Coated | 12/Box | 144 |
| \$76301 | Black | Clear | Hard Coated | 12/Box | 144 |
| \$76341 | Black | Mirror | Hard Coated | 12/Box | 144 |
| S76361B | Black | Shade 6 | Hard Coated | 12/Box | 144 |
| \$76371 | Black | Smoke | Hard Coated | 12/Box | 144 |
| \$76701 | Red, White, Blue | Clear | Hard Coated | 12/Box | 144 |
| \$76771 | Red, White, Blue | Smoke | Hard Coated | 12/Box | 144 |

Maxview™ Safety Glasses

- Lightweight, comfortable and affordable
- Designed to fit over prescription eyewear (OTG)
- Ideal as a visitors' spec as well as for everyday eye protection
- Extra-wide ventilated temples for increased side protection
- Meets ANSI Z87.1+ high impact standards and the following are CSA certified to CAN/CSA Z94.3 standards: S79301 and S79302

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty |
|-------------|--------------|-----------|--------------|----------|----------|
| \$79301 | Clear | Clear | Hard Coated | 12/Box | 144 |
| \$79302 | Clear | Clear | Uncoated | 12/Box | 144 |
| \$79371 | Smoke | Smoke | Hard Coated | 12/Box | 144 |
| \$79372 | Smoke | Smoke | Uncoated | 12/Box | 144 |

Guest-Gard™ Safety Glasses

- Lightweight, comfortable and affordable
- Designed to fit over prescription eyewear (OTG)
- Ideal as a visitors' spec as well as for everyday eye protection
- Classic one-piece molded lens offers excellent front/side protection
- 79103 comes in convenient dispenser box 24/box
- 79108 is bulk packed in quantities of 100
- Meets ANSI Z87.1+ high impact standards and are CSA certified to CAN/CSA Z94.3 standards



S79103

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Pack Qty | Case Qty |
|-------------|--------------|-----------|--------------|------------------|----------|
| \$79103 | Clear | Clear | Uncoated | 24/Dispenser Box | 144 |
| \$79108 | Clear | Clear | Uncoated | 100/Bulk Packed | 144 |

sellstrom.



S73801



S76301



S76701



S79301



S79103/S79108

surewerx.com/usa Table of Contents

sellst.rom.



Bifocal magnifiers







SAFETY GLASSES — BIFOCALS

- Sellstrom offers two popular styles of bifocal magnifying safety glasses
- Developed for workers requiring magnifiers when performing close-vision tasks
- Available in three magnifying powers: 1.5, 2.0 & 2.5
- All glasses are made using virgin, unitary polycarbonate lenses
- Provide 99.9% UV protection
- Meets ANSI Z87.1+ high-impact standards

X300RX Safety Glasses

- The X300RX offers all of the same features as our popular X300 but with bifocal magnification technology
- Lightweight, comfortable, and very affordable
- Lens features an anti-scratch hard coating

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Magnification | Pack. Qty | Case Qty. |
|-------------|--------------|-----------|--------------|---------------|-----------|-----------|
| \$70703 | Clear | Clear | Hard Coated | 1.5x | 12/Box | 144 |
| \$70704 | Clear | Clear | Hard Coated | 2.0x | 12/Box | 144 |
| \$70705 | Clear | Clear | Hard Coated | 2.5x | 12/Box | 144 |

XM340RX Safety Glasses

- The XM340RX offers all of the same features as our popular XM340 but with bifocal magnification technology
- High-impact optically correct wrap style dual PC lenses offer superior coverage
- Lenses are mounted to the frame with a ventilation space, minimizing fogging
- Soft rubberized temple tips and soft nose piece offers all-day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

| PRODUCT NO. | Temple Color | Lens Tint | Lens Coating | Magnification | Pack. Qty | Case Qty. |
|-------------|--------------|-----------|--------------|---------------|-----------|-----------|
| \$74202 | Smoke/Black | Clear | Hard Coated | 1.5x | 12/Box | 144 |
| \$74203 | Smoke/Black | Clear | Hard Coated | 2.0x | 12/Box | 144 |
| \$74204 | Smoke/Black | Clear | Hard Coated | 2.5x | 12/Box | 144 |

SAFETY GLASSES – ACCESSORIES

| PRODUCT NO. | Description |
|-------------|--|
| \$79901 | Black Padded Hard Case with Belt Clip Attachment |
| \$79904 | Black Sellstrom Safeguards Microfiber Bag |

SAFETY GLASSES — SHADE 3 AND 5 IR

- Sellstrom offers three styles of safety glasses specifically for use in welding and fabrications shops
- B5 model is also available with clear lens
- Available in Shade 3 and Shade 5 IR for soldering, brazing and cutting operations
- All glasses are made with anti-scratch polycarbonate lenses
- Provide 99.9% UV protection

B5™ Safety Glasses

- Features fold-out contouring side shields for maximum eye protection
- Arms are extendable for maximum fit and comfort
- Dual polycarbonate lenses are available in clear and Shade 5 IR
- Meets or exceeds ANSI Z87.1+ high impact standards
- Model S74751 is **CE certified**

| PRODUCT NO. | Temple Color | Side Shield | Lens Tint | Lens Coating | Pack Qty | Case Qty. | |
|-------------|--------------|-------------|------------|--------------|----------|-----------|--|
| \$74701 | Black | Clear | Clear | Hard Coated | 12/Box | 144 | |
| \$74751 | Black | Black | Shade 5 IR | Hard Coated | 12/Box | 144 | |

X35™ Safety Glasses

- Temple arms molded with side shields for maximum eye protection
- Features unique spring-loaded flip window
- It's easy and safe by keeping the glasses on at all times, the operator can flip the shaded lenses up or down, providing uninterrupted eye protection during cutting and grinding operations
- Clear lens provides eye protection when the flip plate is in the up position
- Flip windows available in two Shades: 3 IR and 5 IR
- Meets or exceeds ANSI Z87.1+ high impact standards
- CE certified

| PRODUCT NO. | Color | Fixed Lens | Flip Lens Tint | Lens Coating | Pack Qty | Case Qty. |
|-------------|-------|------------|----------------|--------------|----------|-----------|
| \$72903 | Black | Clear | Shade 3 IR | Hard Coated | 12/Box | 144 |

sellstrom_®




S7470



S74751

Fold-out contouring side shield




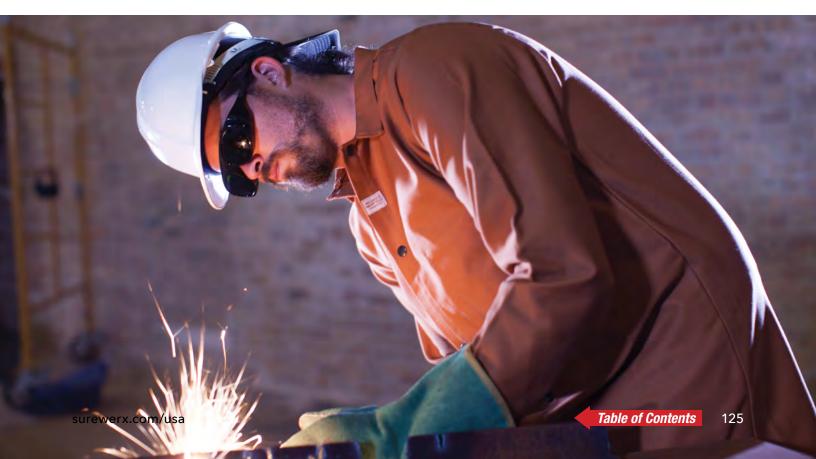





sellstrom.

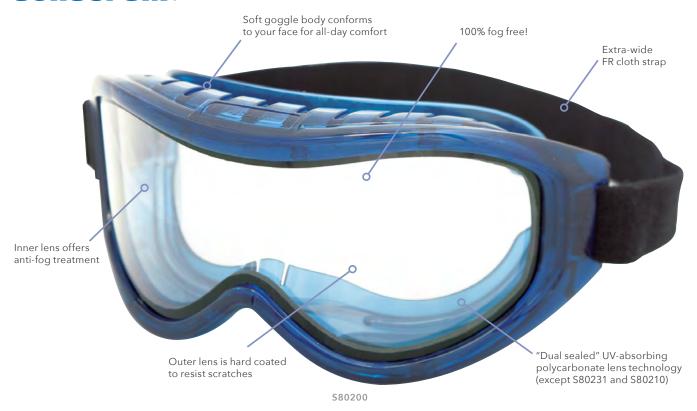

GOGGLES — PREMIUM





Odyssey II Safety Goggle Series

- The Odyssey II premium goggle series has been a market leader for 20 years
- Unique "dual sealed" UV absorbing polycarbonate lens technology (except single lens clean room and Shade 5 cutting models)
- Dual lens models offer anti-fog treatment on inside lens, anti-scratch on outside lens
- Industrial, chemical splash, and Shade 5 models feature top and bottom indirect vents, providing superior ventilation and the safest operator conditions
- 100% fog free, even in the worst conditions
- Stylish soft goggle body conforms to your face, providing a comfortable yet snug seal and maximum protection against liquids and dust
- Exceptional panoramic views
- Specially designed to fit over prescription eyewear
- Simply the best goggle in the market
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S80200, S80201, S80202, S80203, S80210, S80211, S80231 CSA certified to CAN/CSA Z94.3 standards

GOGGLES - PREMIUM

Odyssey II Series Industrial Dual Lens Model

- Our most popular Odyssey II model
- Ideal for a wide variety of applications including construction sites, shop use, and general industrial work-place protection
- Complete with extra-wide flame retardant cloth strap (\$80246)

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty. |
|-------------|-------------------|-----------|------|----------------------|-------|-----------|
| \$80200 | Blue | Indirect | Dual | Hard Coated/Anti-Fog | Clear | 100 |

Odyssey II Series Chemical Splash Dual Lens Goggle

- Specifically designed for those applications where the risk of a chemical splash exists
- Available in three lens tints: clear, smoke and amber
- Complete with extra-wide gray, latex free neoprene strap

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty. |
|-------------|-------------------|-----------|------|----------------------|-------|-----------|
| \$80201 | Blue | Indirect | Dual | Hard Coated/Anti-Fog | Clear | 100 |
| \$80202 | Blue | Indirect | Dual | Hard Coated/Anti-Fog | Amber | 100 |
| \$80203 | Blue | Indirect | Dual | Hard Coated/Anti-Fog | Smoke | 100 |

Odyssey II Series Tactical Dual Lens Goggle

- Specifically designed with high temperature vented body for police, prisons and military tactical applications
- Features a closed cell foam face seal design
- Complete with extra wide flame retardant strap

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty. |
|-------------|-------------------|-----------|------|----------------------|-------|-----------|
| \$80290 | Black (high temp) | Sealed | Dual | Hard Coated/Anti-Fog | Clear | 100 |

Odyssey II Series Clean Room Goggle

- Specifically designed for clean room applications
- Unlike traditional single use clean room goggles, these premium goggles are re-usable and designed for multi-use clean room applications
- Can be autoclaved
- Top-vented body with clear uncoated lens
- CE certified
- Complete with extra-wide gray, latex free neoprene strap (\$80251)

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty. |
|-------------|------------|------------|--------|----------|-------|-----------|
| \$80231 | Blue | Top-Vented | Single | Uncoated | Clear | 100 |

INCREDIBLE COMFORT & FIT!

sellstrom_®



BEST

S80200



S80201



S80202



S80203



S80290



S80231

sellstrom_®



S80210



S80245



S79905

GOGGLES - PREMIUM

Odyssey II Series Shade 5 Cutting Goggle

- Features a durable Shade 5 IR (single) lens
- Specifically designed for grinding, chipping and brazing operations in fabrication and welding shop applications
- Complete with extra wide flame retardant strap (80246)

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty. |
|-------------|-------------------|-----------|--------|----------|--------------|-----------|
| \$80210 | Black (High Temp) | Indirect | Single | Uncoated | Shade 5 IR** | 100 |
| \$80211 | Black (High Temp) | Indirect | Single | Uncoated | Shade 5 IR* | 100 |

BEST

Black Nylon Goggle Case c/w Belt Loop

| PRODUCT NO. | Description | Fits Goggle Models |
|-------------|--------------------------------|---------------------|
| \$80245 | Black Padded Nylon Goggle Case | All Odyssey Goggles |


Microfiber Bags for Odyssey II Goggles

| PRODUCT NO. | Description | Fits Goggle Models | | |
|-------------|----------------------|------------------------|--|--|
| \$79905 | Black Microfiber Bag | All Odyssey II Goggles | | |
| \$79906 | Black Microfiber Bag | Wildland Fire Goggles | | |



^{*}Packed in POS clamshell
**Packed in convenient polybag

sellstrom_®

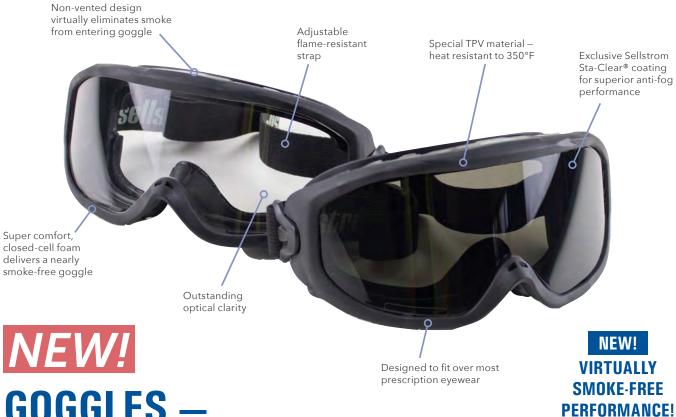

GOGGLES — PREMIUM WILDLAND FIREFIGHTING



Odyssey II Wildland Firefighting Goggles

- Specially designed for use in wildland firefighting applications
- TPV material construction is heat resistant to 350°F
- Non-vented style virtually eliminates smoke from entering goggle
- Closed-cell foam design offers a soft but firm seal and contributes to a smoke-free goggle
- Unique Sta-Clear® coating provides superior anti-fog performance
- Adjustable flame-resistant band for a custom fit
- Outstanding optical clarity and fits over prescription eyewear
- Meets ANSI Z87.1+ high impact standards

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty. |
|-------------|------------|-----------|--------|---------------------|-------|-----------|
| \$80225 | Black | Sealed | Single | Sta-Clear® Anti-Fog | Clear | 144 |
| \$80226 | Black | Sealed | Single | Sta-Clear® Anti-Fog | Smoke | 144 |













GOGGLES — PREMIUM SPECIALTY






- Jackson introduces a new premium goggle with detachable flip-up/flip-down face shield
- Stylish super-soft goggle body conforms to your face, ensuring a comfortable snug seal and maximum protection against liquids and dust
- Indirect vents along with an anti-fog lens coating ensures a safe, fog-free working environment while offering superior protection against dust and chemical splashes
- Optically correct polycarbonate lens provide exceptional panoramic views
- Specially designed to fit over prescription eyewear
- Face shield is easily detachable

GOGGLES — PREMIUM SPECIALTY

GPL500 Series Premium Safety Goggle with Detachable Flip-Up/Flip-Down Face Shield



- Extra-wide flame retardant strap is swivel mounted to goggle
- Provides 99.9% UV protection
- Available in three tints: Clear, IRUV 3, and IRUV 5
- · Clear version is ideal for industrial, mining, cutting, grinding, construction, woodworking, machine shop, and pressure washing applications
- Shade 3 IR goggle is coated to provide IR protection for oxy/acetylene cutting and light brazing applications
- Shade 5 IR goggle is coated to provide IR protection for oxy/acetylene cutting, brazing, and plasma cutting applications
- Meets ANSI Z87.1+ high impact standards
- Models 21000, 21002 CSA certified to CAN/CSA Z94.3 standards
- 21000, 21001, 21002 CE certified

| PRODUCT NO. | Model No. | Body Color | Face Shield Color | Lens | Coatings | Tint | Case Qty. |
|-------------|-----------|-------------------|-------------------|--------|----------|------------|-----------|
| 21000 | GPL500 | Blue | Blue | Single | Anti-Fog | Clear | 6 |
| 21001 | GPL530 | Black | Green | Single | Anti-Fog | Shade 3 IR | 6 |
| 21002 | GPL550 | Black | Green | Single | Anti-Fog | Shade 5 IR | 6 |

GOGGLES – ADVANTAGE PLUS SERIES

GM500 Safety Goggle

- The GM500 goggle combines comfort, fit, safety, and great looks in one product
- Stylish orange/black co-molded soft TPR body provides comfort and fit
- Molded curved polycarbonate lens provides outstanding panoramic views with virtually no distortion
- Top and bottom indirect vents along with an anti-fog lens coating provides superior ventilation and a safe, fog-free working environment
- Indirect vents provide superior protection against dust and chemical splashes
- Swivel mounted, extra-wide flame retardant strap
- Specially designed to fit over prescription eyewear
- Provides 99.9% UV protection
- Meets ANSI Z87.1+ high impact standards and CSA certified to CAN/CSA Z94.3 standards

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty. |
|-------------|--------------|-----------|--------|----------|-------|-----------|
| \$82500 | Orange/Black | Indirect | Single | Anti-Fog | Clear | 200 |

GM200 Safety Goggle

- The GM200 goggle combines comfort, fit, safety, and great looks in one product
- Super-soft smoke colored body is designed with extra-wide face seal lip for exceptional comfort and fit
- Molded optically correct polycarbonate lens provides panoramic views with little distortion
- Top and bottom indirect vents along with an anti-fog lens coating provides superior ventilation and a safe, fog-free working environment
- Indirect vents provide superior protection against dust and chemical splashes
- Extra-wide flame retardant strap
- Provides 99.9% UV protection
- All these features at an economical price ideal for use in schools
- Meets ANSI Z87.1+ high impact standard

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty. |
|-------------|------------|-----------|--------|----------|-------|-----------|
| \$82000 | Smoke | Indirect | Single | Anti-Fog | Clear | 200 |





BEST

NEW!

BETTER

** BETTER

21000



21001 21002





S82500



\$82000



sellstrom.

GOGGLES – ADVANTAGE SERIES (USA MADE)

880, 881, and 882 Series Safety Goggles

- Proudly made in the USA
- Green tinted flexible PVC body ensures proper fit
- Polycarbonate UV-absorbing clear lenses
- Three vent options available to fit your every need
- Adjustable 18" green flame-retardant headband (S22448)
- Available with anti-fog lens coating
- All models meet or exceed ANSI Z87.1+ high impact standards
- Models S88200, S88210 CSA certified to CAN/CSA Z94.3 standards



880 Direct Vent Safety Goggles

- Direct vent series
- Provides maximum air flow and protection against flying debris

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|-------------------|-----------|-------|----------|-----------------|-----------|
| \$88000 | Green | Direct | Clear | Uncoated | 1/Bag | 36 |
| \$88003 | Green | Direct | Clear | Uncoated | 150 Bulk Nested | 150 |
| \$88010 | Green | Direct | Clear | Anti-Fog | 1/Bag | 36 |

GOOD

MADE IN



S88110

881 Non-Vented Safety Goggles

- Non-vented series
- Offers best protection from liquids and dust particles

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|------------|-----------|-------|----------|----------|-----------|
| \$88110 | Green | Non-Vent | Clear | Anti-Fog | 1/Bag | 36 |

S88200

882 Indirect Vent Chemical Splash Safety Goggles

- Indirect vent chemical splash series
- Protects against liquid, dust, smoke, and chemical splash environments

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|------------|-----------|-------|----------|----------|-----------|
| \$88200 | Green | Indirect | Clear | Uncoated | 1/Bag | 36 |
| \$88210 | Green | Indirect | Clear | Anti-Fog | 1/Bag | 36 |

GOGGLES – ADVANTAGE SERIES

810 and 812 Series Safety Goggles

- Our most economically priced goggle series
- Clear flexible PVC body ensures proper fit
- Polycarbonate UV-absorbing clear lenses
- Three vent options available to fit your every need
- Adjustable 18" black flame-retardant headband (S22448)
- Available with anti-fog lens coating
- 813 series come with padded face seal
- 830 and 832 series are mini versions for children, students, and small faces
- Meets ANSI Z87.1+ high-impact standards

810 Direct Vent Safety Goggles

- Direct vent series
- Provides maximum air flow and protection against flying debris
- Models S81000 and S81010 CSA certified

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|-------------------|-----------|-------|----------|----------|-----------|
| \$81000 | Clear | Direct | Clear | Uncoated | 1/Bag | 200 |
| \$81010 | Clear | Direct | Clear | Anti-Fog | 1/Bag | 200 |

812 Indirect Vent Chemical Splash Safety Goggles

- Indirect vent chemical splash series
- Protects against liquid, dust, smoke, and chemical splash environments
- Model S81210 CSA certified

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|-------------------|-----------|-------|----------|----------|-----------------|
| \$81200 | Clear | Indirect | Clear | Uncoated | 1/Bag | 160 |
| \$81210 | Clear | Indirect | Clear | Anti-Fog | 1/Bag | 160 |
| S81210E | Clear | Indirect | Clear | Anti-Fog | 1/Bag | 144 NEW! |

812 Non-Vented Safety Goggles

- Non-vented goggle
- Offers best protection from liquids and dust particles
- Model S81220 is CSA certified

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|------------|-----------|-------|----------|----------|-----------------|
| \$81220 | Clear | Non-Vent | Clear | Anti-Fog | 1/Bag | 200 |
| S81220X | Green | Non-Vent | Clear | Anti-Fog | 1/Bag | 200 NEW! |

sellstrom_®



GOOD

S81000



S81200



S81210E



S81220



S81220X

sellstrom.





S81320



S81330



S83200

GOGGLES – ADVANTAGE SERIES

813 Direct Vent Safety Goggles (Padded)

- Direct vent series
- Provides maximum air flow and protection against flying debris
- Features padded face seal for maximum safety

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|------------|-----------|-------|----------|----------|-----------|
| \$81310 | Clear | Direct | Clear | Anti-Fog | 1/Bag | 200 |

GOOD

813 Indirect Vent Chemical Splash Safety Goggle (Padded)

- Indirect vent chemical splash model
- Protects against liquid, dust, smoke, and chemical splash environments
- Features padded face seal for maximum safety

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|------------|-----------|-------|----------|----------|-----------|
| \$81320 | Clear | Indirect | Clear | Anti-Fog | 1/Bag | 200 |

813 Non-Vented Safety Goggles (Padded)

- Non-vented goggle
- Offers best protection from liquids and dust particles
- Features padded face seal for maximum safety

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|------------|-----------|-------|----------|----------|-----------|
| \$81330 | Clear | Non-Vent | Clear | Anti-Fog | 1/Bag | 200 |

830 Direct Vent "Mini" Safety Goggles

- Direct vent series
- Provides maximum air flow and protection against flying debris
- Mini version for children, students, and small faces

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|------------|-----------|-------|----------|----------|-----------|
| \$83000 | Green | Direct | Clear | Uncoated | 1/Bag | 200 |
| \$83010 | Green | Direct | Clear | Anti-Fog | 1/Bag | 200 |

832 Indirect Vent "Mini" Chemical Splash Safety Goggles

- Indirect vent chemical splash series
- Protects against liquid, dust, smoke, and chemical splash environments
- Mini version for children, students, and small faces

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Packaged | Case Qty. |
|-------------|------------|-----------|-------|----------|----------|-----------|
| \$83200 | Green | Indirect | Clear | Uncoated | 1/Bag | 100 |
| \$83210 | Green | Indirect | Clear | Anti-Fog | 1/Bag | 200 |

GOGGLES — WELDING

Sellstrom carries one of the widest ranges of welding goggles in the industry

- All goggles feature soft, flexible green PVC bodies for excellent comfort and fit
- Top and bottom indirect vents provide superior ventilation and a safe, fog-free working environment (except S85150 eye cup goggle)
- Indirect vents provide superior protection against dust and chemical splashes
- Meets ANSI Z87.1+ high impact standards
- Models S80210, S85150, S85250, S85550 **CSA certified to CAN/CSA Z94.3** standards

Odyssey II Series Shade 5 Cutting Goggle

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Tint | Case Qty. |
|-------------|-------------------|-----------|--------|----------|--------------|-----------|
| \$80210 | Black (high temp) | Indirect | Single | Uncoated | Shade 5 IR** | 100 |

Plate Goggle

- Features standard size 2" x 4-1/4" Shade 5 IR fixed plate window
- Window includes filter, cover, and impact

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Case Qty. |
|-------------|------------|-----------|------------|----------|-----------|
| \$85450 | Green | Indirect | Shade 5 IR | Uncoated | 120 |

Lift Front Plate Goggle

- Features standard size 2" x 4-1/4" lift front plate window
- It's easy and safe by keeping the welding goggle on at all times, the operator can flip the shaded window up or down, providing uninterrupted eye protection during cutting and grinding operations
- Clear lens provides eye protection when the flip plate is in the up position
- Flip windows available in two shades: 5 IR and Shade 6 Cobalt Blue
- Window includes filter, cover, and impact plates

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Case Qty. |
|-------------|------------|-----------|---------------------|----------|-----------|
| \$85550 | Green | Indirect | Shade 5 IR | Uncoated | 100 |
| S85560B | Green | Indirect | Shade 6 Cobalt Blue | Uncoated | 100 |

Lens Cover Goggle

• Features 50mm eye-cup style fixed plate windows with soft PVC body

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Case Qty. |
|-------------|------------|-----------|------------|----------|-----------|
| \$85250 | Green | Indirect | Shade 5 IR | Uncoated | 100 |

Lift Front Lens Cover Goggle

- Features 50mm eye-cup style lift front eye-cup windows with soft PVC body
- It's easy and safe by keeping the welding goggle on at all times, the operator
 can easily flip the shaded windows up or down as required providing uninterrupted
 eye protection during cutting and grinding operations
- $\bullet\,\,$ Clear lenses provide eye protection when the flip plate is in the up position

| PROD | UCT NO. | Body Color | Vent Type | Lens | Coatings | Case Qty. |
|------|---------|------------|-----------|------------|----------|-----------|
| \$8 | 5350 | Green | Indirect | Shade 5 IR | Uncoated | 100 |

Eye Cup Goggle

- Our most basic welding type goggle
- Features 50mm eye-cup lenses and two individual cup bodies
- Ideal for confined space

| PRODUCT NO. | Body Color | Vent Type | Lens | Coatings | Case Qty. |
|-------------|------------|-----------|------------|----------|-----------|
| \$85110 | Green | Non-Vent | Clear | Uncoated | 100 |
| \$85150 | Green | Non-Vent | Shade 5 IR | Uncoated | 100 |

sellstrom.



BEST

**

BETTER

**
BETTER

BETTER

GOOD

GOOD

S80210



S85450



S8555



S85250



S85350




S85150





GERMICIDAL CABINETS



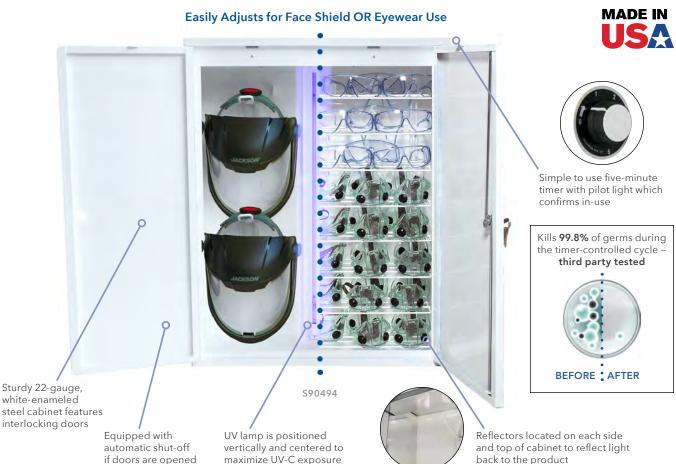

GERMICIDAL CABINETS

Why choose Sellstrom?

Sellstrom's Monitor® 2000 is proudly made in the USA and is the industry leader in UV-C germicidal cabinets. The Monitor® 2000 is underwriters laboratory listed and third-party tested* to eradicate up to 99.8% of germs, bacteria, and fungus on goggles, face shields, protective eyewear, and even sweatbands within five minutes.

Why UV-C sanitizing?

Traditional disinfection methods have been used for centuries – but are they good enough? The truth is that even the most rigorous cleaning with hot water, bleach, and disinfectants can miss harmful germs, bacteria, and mold. Ultraviolet germicidal irradiation (UVGI) is an affordable, environmentally friendly, and nontoxic method of sterilization. UVGI works by breaking down certain chemical bonds and scrambling the structure of DNA, RNA, and proteins, effectively destroying all microorganisms.

*Geneva Laboratory JN20DI525



Monitor® Germicidal Cabinets

- Made in the USA Sellstrom's Monitor Series Germicidal Cabinet has been the industry leader for decades
- Germicidal cabinets sanitize goggles/safety glasses for next use
- Kills 99.4% of germs during the timer controlled cycle in five minutes third party tested
- Sanitizes eyewear surfaces from germs, bacteria, mold, and fungus contaminants
- Sturdy 22-gauge white enameled steel cabinet features interlocking doors
- Features tamper-resistant latches with two keys provided
- Multiple units are keyed alike
- Zero UV radiation escapes during use
- Equipped with automatic shut-off if doors are opened
- Pilot light confirms UV lamp is in use on the Monitor 2000
- Wall or shelf mountable and includes 7' (2.13m) grounded cord
- For indoor use only; temperature range 32° to 104° Fahrenheit

GERMICIDAL CABINETS

Monitor® 2000 Germicidal Cabinet

- The Monitor 2000 has been the top selling germicidal cabinet for decades
- Specially designed for educational and medical industry applications
- Larger 32"H x 24.5"W x 9.5"D format includes eight shelves total
- Each shelf holds approximately five goggles or six safety glasses
- Sanitizes goggles/safety glasses for next use in just five minutes, an industry best
- Underwriters Laboratory listed and CUL certified

| PRODUCT NO. | Description | Use | Case Qty. |
|-------------|---------------------------------|------------------------------|-----------|
| \$90494 | Monitor 2000 Germicidal Cabinet | Education/Medical Industries | 1 |

sellstrom_®



BEST

Monitor® Germicidal Cabinet Replacement Parts

| PRODUCT NO. | RODUCT NO. Description Fits | |
|-------------|--|--------------|
| \$90479 | Keys for Monitor Cabinets (Set of Two) | Monitor 2000 |
| \$90482 | Lamp | Monitor 2000 |
| \$90484 | Interlock Switch | Monitor 2000 |
| \$90486 | Timer Knob and Faceplate | Monitor 2000 |
| \$90488 | Locking Rod Assembly (Lock and Two Keys) | Monitor 2000 |
| \$90496 | Universal Rack (One Rack) | Monitor 2000 |



Optional Magnetic Hooks for Hanging Face Shields in Monitor Cabinet — NEW!

- Allows use of Monitor 2000 germicidal cabinet to sanitize face shields instead of glasses and goggles
- Set of four magnetic hooks allows sanitization of up to four face shields during the five-minute cycle time
- It's easy simply remove the glasses and goggle rack from the Monitor 2000
- Space the four magnetic hooks in a pattern that allows up to four face shields to fit inside the cabinet
- Four magnetic brackets are designed to mount on the metal back wall of the cabinet
- Hang the face shields, close the door, set the timer, and after five minutes, away you go!
- Option expands the range of products that can be sanitized to include safety glasses, goggles, and now face shields
- The following Jackson and Sellstrom face shields have been tested and certified with the Monitor 2000 cabinet, effectively killing 99.4+% of germs:
 - Jackson Quad 500, Maxview, F4XP, MFS-320, 14955, 14957
 - Sellstrom 301, 303, 380, 390, and DP4 Series

| PRODUCT NO. | PRODUCT NO. Description | |
|-------------|-------------------------------------|---|
| 590495 | Magnetic Face Shield Mounting Hooks | 4 |



Monitor 2000 shown with S90495 hooks



sellstrom.

Sta-Clear In Standard Brandon Sta-Clear In Standard Brandon St

S23490 Box & Packets



S23480 Box & Tissues



S23469



S23470

STA-CLEAR™ LENS CLEANING PRODUCTS

- Cleans glass and polycarbonate safety glasses and goggle lenses
- Anti-static, anti-fog cleaning solution impregnated in tissues
- Scratch free contains no silica
- Cleans without streaking or leaving static residue
- Not for fog-free (anti-fog coated) lenses

Sta-Clear™ Pre-Moistened Lens Cleaning Tissue Packets

- Convenient pre-moistened single use packets
- Towelette measures 5" x 8" (12.7 x 20.32cm)
- Convenient dispenser box contains 110 packets
- Can be wall mounted or placed on flat surface

| PRODUCT NO. | ODUCT NO. Description | | Case Qty. |
|-------------|--|-----|-----------|
| \$23490 | Pre-Moistened Non-Alcohol Based Towelettes | 110 | 10/Box |

Sta-Clear™ Lens Cleaning Tissues

- Tissues come dry and must be water activated
- Tissues measure 4.5" x 10.5" (11.43 x 27.31cm)
- Box measures 5.25" x 4.5" x 4" (13.02 x 12.07 x 11.75cm)
- Convenient dispenser box contains 1,000 tissues

| PRODUCT NO. | Description | Tissues/Box | Case Qty. |
|-------------|--|-------------|-----------|
| \$23480 | Water Activated Lens Cleaning Tissue Box | 1000 | 36/Box |

Sta-Clear™ Lens Cleaning Stations

- Stations come with water activated tissues and 16 oz. pump spray bottle
- Tissues come dry and must be water activated
- Tissue measures 4.5" x 10.5" (11.43 x 27.31cm)
- Two variations available:
 - Cardboard station: Measures 8.625" x 6.5" x 5.375"
 - Metal station: Measures 8.75" x 6.5" x 5.25"
 - Metal station can be locked (uses key #23475)
- Opening allows for litter free disposal of used tissues
- Can be wall mounted or placed on flat surface

| PRODUCT NO. | Description | Pack Qty. |
|-------------|---|-----------|
| \$23469 | Cardboard Station (1000 Tissues and Spray Bottle) | 6/Box |
| \$23470 | Metal Station (1000 Tissues and Spray Bottle) | 1/Box |

EQUIPMENT CLEANING PRODUCTS

Sel-Kleen™ Pre-Moistened Equipment Cleaning Packets

- Anti-static, anti-fog cleaning solution impregnated in tissues
- Scratch free contains no silica
- Alcohol-free pads use active ingredient benzalkonium chloride and will not harm even the most sensitive rubber or PVC material
- Convenient single use packets
- Towelette measures 5" \times 8" (12.7 \times 20.32cm)
- Convenient dispenser box contains 110 packets
- Can be wall mounted or placed on flat surface

| PRODUCT NO. | Description | Packets/Box | Case Qty. |
|-------------|--|-------------|-----------|
| \$22185 | Pre-Moistened Non-Alcohol Based Towelettes | 110 | 10/Box |





S22185 Box & Pack



sellstrom.






S90320 16-Gallon Portable Eyewash Station

EMERGENCY EYEWASH





- OSHA regulations listed in 29 CFR outline where and when eyewash equipment must be installed
- ANSI Z358.1 (Emergency Eyewash and Shower Equipment) is the standard that outlines the proper design, performance, and installation of emergency equipment to comply with the OSHA standard
- Sellstrom offers a wide range of emergency eyewash solutions, all of which are designed to meet the ANSI standards





- Six-gallon, gravity-flow personal portable eyewash station
- Ideal as a portable, first response eyewash solution
- Water stream is activated by removing the water retaining strap
- Water is fed through dual spray heads for maximum effectiveness
- 3' drain hose directs waste water into floor drain or storage tank
- Furnished with epoxy coated steel wall mounting bracket • Can also be placed on flat surfaces such as counter tops
- Comes with 8 oz. bottle of bacteriostatic additive (S90322), which protects against growth of bacteria, fungus, algae and acanthamoeba
- Weight: 9.5 lbs. empty
- Complies with ANSI Z358.1 for portable personal eyewash stations


| PRODUCT NO. | Description | Case Qty. |
|-------------|---|-----------|
| 590306 | 6-Gallon Gravit-Eye Portable Personal Eyewash Station | 1 |



S90306

EYEWASH STATIONS — PORTABLE EMERGENCY

Gravit-Eye 16-Gallon Portable Gravity Feed Eyewash Station



- Water is fed through dual spray heads for maximum effectiveness
- Delivers over 14 gallons (53 litres) of water over a 15-minute period
- Hi-vis green body is easily located in case of emergency
- Heavy wall construction with reinforced ribs ensures strength and durability
- Water flow is activated by pulling up (on) or down (off) on bright yellow tray
- Integrated full flow nozzle delivers gentle spray of water
- Waste water is directed through drain opening in tank basin
- 3' drain hose directs waste water into floor drain or storage tank
- Furnished with steel wall mounting bracket
- Can also be placed on flat surfaces such as counter tops
- Comes with 8 oz. bottle of bacteriostatic additive (S90322) which protects against growth of bacteria, fungus, algae and acanthamoeba
- Weight: 13 lbs. empty, 146 lbs. full
- Unit comes completely assembled
- Complies with ANSI Z358.1 for portable eyewash stations

| PRODUCT NO. | Description | Case Qty. |
|-------------|---|----------------------------------|
| \$90320 | 16-Gallon Gravit-Eye Portable Eyewash Station | 1 |
| PRODUCT NO. | Description | Fits |
| \$90335 | Dust Cover | S90320 16-Gallon Eyewash Station |
| \$90321 | 3' Replacement Drain Hose | S90320 16-Gallon Eyewash Station |
| \$90324 | Replacement Mounting Bracket | S90320 16-Gallon Eyewash Station |
| \$90325 | Replacement Dispenser Cap | S90320 16-Gallon Eyewash Station |
| \$90326 | Replacement Manifold Assembly | S90320 16-Gallon Eyewash Station |
| \$90336 | Replacement Threaded Cap | S90320 16-Gallon Eyewash Station |

15-Gallon Portable Pressurized Eyewash/Drench Hose Unit

- 15-gallon pressurized tank portable eyewash station
- Stainless steel tank comes with carrying handles, air intake fitting, pressure gauge and pressure relief valve
- Provides approximately 10 gallons (34 liters) of usable capacity
- Two gentle spray heads with flip top dust cover, internal flow control and filter
- Pressure regulator restricts flow to 0.65 GPM (approx. 15 minutes of flow)
- 1/2" IPS chrome plated brass stay-open ball valve with flag handle
- Drench hose contains a single gentle spray head with flip top dust cover, chrome plated brass squeeze valve, 6' reinforced PVC hose and stainless steel lever handle
- Weight: 35.6 lbs. empty, 119 lbs. full
- Unit comes completely assembled
- Complies with ANSI Z358.1 for portable eyewash stations

| PRODUCT NO. | Description | Case Qty. |
|-------------|---|-----------|
| \$90315 | 15-Gallon Portable Pressurized Eyewash/Drench Hose Unit | 1 |

Eyewash Bacteriostatic Additive — 8 oz.

- 8 oz. bottle of bacteriostatic additive
- For use in all makes of portable eyewash stations
- Protects against growth of bacteria, fungus, algae and acanthamoeba

| PRODUCT NO. | Description | Case/Qty. |
|-------------|--|-----------|
| \$90322 | 8 oz. Bottle of Bacteriostatic Formula | 4/Case |

sellstrom.



MADE IN

USA

S90320



S90335 **Dust Cover Option**



S90315



590322

sellstrom.



S90331



S90333



S90330/S90329

EYEWASH STATIONS — PORTABLE BOTTLES

Rapid-Clear Portable Eyewash Bottle Stations

- Personal eyewash bottle stations are extremely portable and handy
- Quickly flushes contaminants from eyes using a sterile, buffered and preserved saline solution
- The ideal first response solution when continuous water supply is not available
- Single or dual bottle stations available
- Date coded for easy inspection
- Tamper-evident seal with an easy-to-open twist off cap
- Highly visible green plastic backboard can be wall mounted or placed on flat surface
- FDA approved

| PRODUCT NO. | Bottle Size | Туре | Description | Case Qty. |
|-------------|-------------|--------|------------------------------------|-----------|
| \$90331 | 16 oz. | Single | Rapid-Clear Eyewash Bottle Station | 4/Case |
| \$90332 | 32 oz. | Single | Rapid-Clear Eyewash Bottle Station | 4/Case |
| \$90333 | 32 oz. | Double | Rapid-Clear Eyewash Bottle Station | 4/Case |

Rapid Clear Replacement Eyewash Bottle Parts

- Replacement bottles with sterile saline solution
- Date coded for easy inspection
- Tamper-evident seal with an easy-to-open twist off cap
- FDA approved

| PRODUCT NO. | Bottle Size | Description | Case Qty. |
|-------------|-------------|--|-----------|
| \$90329 | 16 oz. | Rapid-Clear Replacement Eyewash Bottle | 12/Case |
| \$90330 | 32 oz. | Rapid-Clear Replacement Eyewash Bottle | 12/Case |







20774



67212



67220



S23410



HEARING PROTECTION

What You Should Know About Hearing Protection!

- Exposure to continuous high noise levels causes irreversible hearing loss
- Developing an effective workplace hearing safety program is critical
- OSHA sets the permissible eight-hour work day noise exposure level at 90 dBA and only two hours of exposure to 100 dBA
- Many companies place noise level limits even lower than the OSHA standard
- Here are guidelines that some companies apply for increased safety
 - 8 hours exposure = 85 dBA
 - 4 hours exposure = 88 dBA
 - 2 hours exposure = 91 dBA
 - 1 hour exposure = 94 dBA

About NRR Ratings and Their Practical Application in the Field

- The NRR ratings found on many hearing protection products in the market, including Jackson and Sellstrom, have been tested and certified in controlled laboratories
- However, working environments are seldom controlled environments
- In the field, hearing protection is not always fitted properly, leading to noise creep and the potential for hearing damage
- As a precaution, NIOSH recommends the following deratings during field use:
 - Ear Muffs NIOSH recommends derating NRR ratings by 25%
 - Earplugs NIOSH recommends derating NRR ratings by 50–75%
- In some applications, to achieve maximum protection, the use of earplugs and muffs together
 may be the safest solution. It is estimated that by combining the two, an extra 5 dBs can be
 added to the overall tested NRR rating


What Level of Protection Do You Need?

All hearing protectors sold by Jackson Safety and Sellstrom are tested to the American National Standards Institute (ANSI) S3.19-1974 Standard to receive a Noise Reduction Rating (NRR), which is labeled on all such products as required by the U.S. Environmental Protection Agency (EPA).

This number gives the consumer a method to judge performance among different models of hearing protectors – a higher NRR indicating more effective protection against sound. Some models of hearing protectors have multiple NRR numbers. This reflects the fact that these hearing protectors may be worn with their headbands in different positions.

Hearing Loss is Forever — Take Prevention Seriously!

Hearing protection should be taken very seriously and protectors, either muffs or plugs, should be comfortable to wear and offer sufficient attenuation to prevent hearing loss based on individual protection needed.



EARPLUGS — PREMIUM DISPOSABLE

Disposable Earplugs — Bullet Shape

- Contoured bullet shape premium quality polyurethane earplugs
- Gently but quickly expands to fit ear canal one size fits all!
- Soft, non-irritating PU foam for maximum comfort
- Available corded and uncorded
- Plugs are individually packed in pairs and sold:
 - Uncorded = 200 pairs in convenient dispenser box
 - Uncorded = 500 pairs in bulk bag (replacement plugs for dispenser)
 - Uncorded = 500 pairs in convenient see-through wall dispenser
 - Uncorded = 10 pairs in retail slide blister package
 - Corded = 100 pairs in convenient dispenser box
- CSA Class AL

| PRODUCT NO. | Туре | Shape | Color | NRR | Package | Case Qty. |
|-------------|----------|--------|--------------|-----|----------------------------|-----------|
| \$23410 | Uncorded | Bullet | Hi-Vis Green | 32 | 200 Pair Dispenser Box | 10/Box |
| \$23411 | Uncorded | Bullet | Hi-Vis Green | 32 | 500 Pair Bulk Pack | 10/Packs |
| \$23412 | Corded | Bullet | Hi-Vis Green | 32 | 100 Pair Dispenser Box | 20/Box |
| \$23413 | Uncorded | Bullet | Hi-Vis Green | 32 | 500 Pair In Wall Dispenser | 8 |
| S23414 | Uncorded | Bullet | Hi-Vis Green | 32 | 10 Pair in Retail Package | 200/Pack |

H10 DISPOSABLE EARPLUGS

H10 Disposable Earplugs — Bullet Shape

- Soft roll-down foam
- Smooth "bullet" shape for easy insertion
- High visibility for easy compliance monitoring
- Gravity feed display box

| PRODUCT NO. | Description | NRR | Class | Case Count |
|-------------|-------------|-----|-------|-----------------------------|
| 67210 | Uncorded | 31 | A(L) | 200 Pairs/Box; 8 Boxes/Case |
| 67212 | Corded | 31 | A(L) | 100 Pairs/Box; 8 Boxes/Case |

H10 Disposable Earplugs Dispenser and Bulk Pack (500 Pairs)

Farnlugs

- Featuring H10 uncorded disposable foam earplugs
- 500 pairs (or 1000 earplugs) packed in a polybag

Dispenser

- Wall mountable and desktop ready
- Easy, flip open for quick refill
- Clear globe helps to indicate when to refill
- Mounting template and hardware included

| PRODUCT NO. | Description | NRR | Class | Case Count |
|-------------|-------------|-----|-------|----------------------------|
| 25708 | Uncorded | 31 | A(L) | 500 Pairs/Bag; 4 Bags/Case |
| 25709 | Dispenser | N/A | N/A | 1 Dispenser/Case |

H10 Metal Detectable Disposable Earplugs

- Designed to deliver on performance and comfort and help you improve compliance
- Distinctive blue color for easy compliance monitoring
- Individual packaging for hygenic storage
- Universal size
- Metal embedded in the earplug for easy detection

| PRODUCT NO. | Description | NRR | Class | Case Count |
|-------------|-------------|-----|-------|-----------------------------|
| 13821 | Corded | 31 | A(L) | 100 Pairs/Box; 8 Boxes/Case |

sellst.rnm.



S23410



S23412





S23413

S23414





.



13821

Table of Contents

sellstrom_®



S23420



22/21



S23422

EARPLUGS — PREMIUM REUSABLE

Reusable Earplugs — Tapered

- Newly developed four-flange, tapered earplug ensures optimum ear canal coverage
- Firm push/pull post makes insertion and removal quick and easy
- One size fits all
- Reusable can be washed and reused dozens of times
- Made with non-allergenic polymer materials
- Plugs are individually packed in pairs and sold:
 - Uncorded = 100 pair/box
 - Corded = 100 pair/box
 - Corded = 1 pair in see-through plastic storage case with belt clip
- Independently tested/certified to NRR 27 (ANSI S3.19)
- CSA Class AL



S23421

| PRODUCT NO. | Туре | Shape | Color | Package | Case Qty. |
|-------------|----------|---------|-------------------|---------------------|-----------|
| \$23420 | Uncorded | Tapered | Blue/Hi-Vis Green | 100 Pair/Box | 20/Box |
| \$23421 | Corded | Tapered | Blue/Hi-Vis Green | 100 Pair/Box | 20/Box |
| \$23422 | Corded | Tapered | Blue/Hi-Vis Green | 1 Pair/Plastic Case | 500 |

H20 REUSABLE TRIPLE FLANGE EARPLUGS

H20 Reusable Earplugs — Tapered

- One size fits all
- Ridged for a better grip with insertion and removal
- Soft TPE flanges for comfortable fit and seal

| PRODUCT NO. | Description | NRR | Class | Case Count |
|-------------|-------------|-----|-------|-----------------------------|
| 67220 | Uncorded | 26 | A(L) | 100 Pairs/Box; 4 Boxes/Case |
| 67221 | Corded | 26 | A(L) | 100 Pairs/Box; 4 Boxes/Case |

H20 Metal Detectable Reusable Earplugs

- Designed to deliver on performance and comfort and help you improve compliance
- Distinctive blue color for easy compliance monitoring
- Individual packaging for hygenic storage
- Universal size
- Metal embedded in the earplug for easy detection

| PRODUCT NO. | Description | NRR | Class | Case Count |
|-------------|-------------|-----|-------|-----------------------------|
| 13822 | Corded | 26 | A(L) | 100 Pairs/Box; 4 Boxes/Case |





67220



13822

EARPLUGS — PREMIUM BANDED

Banded Earplugs

- Banded earplugs are designed to wear around the neck when not in use
- Ensures workers always have quality hearing protection when required
- Ideal for regular and intermittent applications easily installed or removed
- Compliance enforcement is made easy due to the hi-vis green band
- Specially designed band shape is curved at the plug end keeps the ear pods up and away
 from dirty and contaminated surfaces when not in use
- Comfortable blue earplugs/pods are easily replaced when dirty (\$23431)
- Used extensively on construction work sites, at airports and race tracks, in factory and shop
 applications, and wherever reusable ear protection is required
- Independently tested/certified to NRR 25 (ANSI S3.19)
- CSA Class AL


| PRODUCT NO. | Туре | Shape | Color | Package | Case Qty. |
|-------------|--------|-----------------------|--------------|---------|-----------|
| \$23430 | Banded | Tapered | Hi-Vis Green | 1/Bag | 320 |
| \$23431 | Rep | lacement Blue Plugs/l | 10 Pair/Bag | 2,400 | |









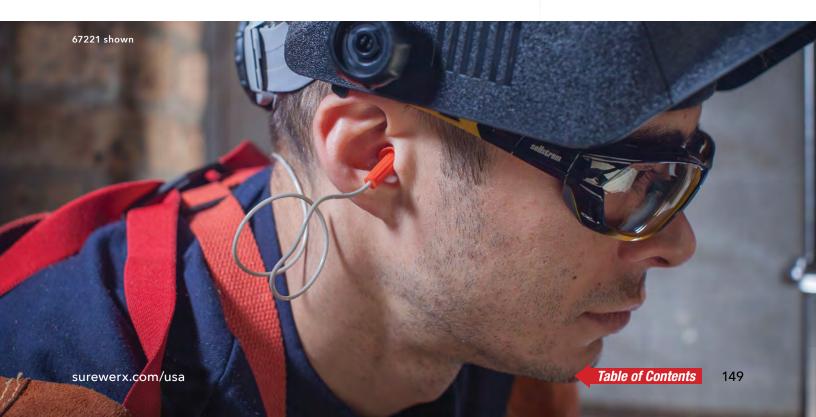







Padded comfortable headband

> Dielectric thermoplastic material retains shape and pressure for consistent noise reduction

EAR MUFFS —

SUPER PREMIUM DIELECTRIC



20774



20775

H70 Vibe Premium Dielectric Ear Muff

20773



- Jackson's exclusive H70 Vibe® ear muffs offer premium comfort, fit, and protection
- Stylish, modern lightweight design
- Dielectric durable thermoplastic material protects you from electric shocks and shorts
- Headband, swivel fork arms, and cup pads have been carefully designed to deliver strength, durability, consistent noise reduction, and most importantly, to offer a comfortable snug fit with minimal pressure for all-day comfort
- Cup pads are super soft and comfortable ideal for extended use
- Easily adjustable for quick and convenient positioning
- Features soft foam headband padding for maximum operator comfort and style
- Independently tested/certified to ANSI S3.19
- Available in both banded and hard hat cap mount format for use with slotted hard hats such as Jackson's SC-6
- Available in three popular NRR ratings
- Comes in four-color box with integrated fold-out hang tag
- CE certified

Vibe Headband Style

| PRODUCT NO. | Old Code | Cup Color | Headband | NRR Rating | Pkg. Qty. | Case Qty. |
|-------------|----------|-----------|--------------|------------|-----------|-----------|
| 20773 | 3015087 | Orange | Comfort Foam | 23 | 1/Pack | 20/Packs |
| 20774 | 3015089 | Red | Comfort Foam | 26 | 1/Pack | 20/Packs |
| 20775 | 3015090 | Black | Comfort Foam | 29 | 1/Pack | 20/Packs |

Vibe Cap Mount Style

| PRODU | T NO. | Old Code | Cup Color | Mount | NRR Rating | Pkg. Qty. | Case Qty. |
|-------|-------|----------|-----------|-----------|------------|-----------|-----------|
| 207 | 76 | 3015091 | Orange | Cap Mount | 22 | 1/Pack | 20/Packs |
| 207 | 77 | 3015092 | Red | Cap Mount | 25 | 1/Pack | 20/Packs |
| 207 | 78 | 3015093 | Black | Cap Mount | 27 | 1/Pack | 20/Packs |

EAR MUFFS — PREMIUM DIELECTRIC

HPD425 Premium Dielectric Ear Muff

- HPD425 ear muffs offer premium features and protection
- Stylish, modern lightweight design
- Dielectric protects you from electric shocks and shorts
- Hi-vis green/black cups are highly visible even in low light conditions
- Cup pads are soft and comfortable ideal for extended use
- Heavy-duty non-conductive swivel fork arms ensure strength & durability
- Easily adjustable for quick and convenient positioning
- Features soft foam head band for maximum operator comfort and style
- Independently tested/certified to NRR 25 (ANSI S3.19)
- CSA Class A

| PRO | DUCT NO. | Cup Color | Headband | NRR Rating | Pkg. Qty | Case Qty. |
|-----|----------|--------------------|---------------|------------|----------|-----------|
| S | 23407 | Hi-Vis Green/Black | Soft EVA Foam | 25 dB | 10/Box | 40 |

EAR MUFFS — PREMIUM SERIES

- Sellstrom introduces a full range of ear muffs offering premium features
- Stylish, modern lightweight design
- Cup pads are soft and comfortable ideal for extended use
- Strong stainless steel wire swivel fork arms ensure strength & durability
- Easily adjustable for quick and convenient positioning
- Feature soft EVA head bands for maximum operator comfort and style

HP431 Premium Ear Muff

- The HP431 ear muff offers our highest NRR rating (31 dB)
- Ideal for work in very high noise environments
- Independently tested/certified to NRR 31 (ANSI S3.19)
- CSA Class A

| PRODUCT NO. | Cup Color | Headband | NRR Rating | Pkg. Qty | Case Qty. |
|-------------|-----------|---------------|------------|----------|-----------|
| \$23406 | Black/Red | Soft EVA Foam | 31 dB | 10/Box | 60 |

HP427 Premium Ear Muff

- Our most popular premium series ear muff
- Low profile "slim" design is ultra-lightweight and comfortable
- Folds into a very compact, easy-to-store size
- Independently tested/certified to NRR 27 (ANSI S3.19)
- CSA Class AL

| PRODUCT NO. | Cup Color | Headband | NRR Rating | Pkg. Qty | Case Qty. |
|-------------|--------------|---------------|------------|----------|-----------|
| S23404 | Black/Orange | Soft EVA Foam | 27 dB | 10/Box | 60 |

HP424 Premium Ear Muff

- Low profile "slim" design is ultra-lightweight and comfortable
- Folds into a very compact, easy-to-store size
- Independently tested/certified to NRR 24 (ANSI S3.19)
- CSA Class A



sellstrom.



**
BETTER

**

BETTER

BETTER

**

BETTER

\$23407

Soft EVA foam headband



S23406

Soft EVA foam headband



S23404

Soft EVA foam headband



S23403

Table of Contents

sellstrom_®





- Sellstrom carries two Advantage Series ear muffs
- Comfortable, lightweight, and economically priced
- Dielectric protects you from electric shocks and shorts
- Cup pads are soft and comfortable ideal for extended use
- Tough, long-lasting tension bands
- Easily adjustable for quick and convenient positioning

Tonedown 200 Ear Muffs

- Our highest NRR rated economy ear muff (26 dB)
- Bright safety color yellow cups
- Independently tested/certified to NRR 26 (ANSI S3.19)



GOOD

GOOD

| PRODUCT NO. | Cup Color | Headband | NRR Rating | Case Qty. |
|-------------|-----------|----------------|------------|-----------|
| \$23400 | Yellow | Curved Plastic | 26 dB | 40/Box |



H225 Ear Muffs

- Our most popular and economically priced ear muff
- Attractive blue cups
- Comes in convenient clamshell package for display purposes
- Independently tested/certified to NRR 25 (ANSI S3.19)
- CSA Class A

| PRODUCT NO. | Cup Color | Headband | NRR Rating | Pkg. Qty. | Case Qty. |
|-------------|-----------|----------------|------------|-----------|-----------|
| \$23401 | Blue | Curved Plastic | 25 dB | 10/Box | 60 |

JACKSON®



H70 PASSIVE EAR MUFFS

H70 Onyx® Ear Muffs

- Lightweight, durable, and economical protection for low- to medium-level noise environments
- Ultra-soft ear cushions for comfort and extended wear
- Ball-and-socket pivoting cup attachment provides optimum pressure distribution
- Header bag packaging
- Earmuff is dielectric with no exposed metal parts

| PRODUCT NO. | Old Code | Description | NRR Rating | Case Count |
|-------------|----------|----------------|------------|------------|
| 20771 | 3015085 | Headband Style | 23 dB | 1/Pack |
| 20772 | 3015086 | Headband Style | 26 dB | 1/Pack |

EAR MUFFS — SUPER PREMIUM CAP MOUNTED

EXCLUSIVE!

BEST

** BETTER

H70 Vibe® Ear Muffs — Super Premium Capmount

- Innovative design that adjusts to fit most head shapes and sizes
- Dielectric, durable thermoplastic material retains shape and pressure for consistent noise reduction
- Various noise level reductions available in capmount styles
- Exclusive Jackson Safety® designs
- Extreme comfort and fit
- Comes in four-color display box

| PRODUCT NO. | Old Code | Description | NRR Rating | Case Count | Master Carton Qty. |
|-------------|----------|------------------|------------|------------|--------------------|
| 20776 | 3015091 | Capmount, Orange | 22 | 1/Pack | 20/Pack |
| 20777 | 3015092 | Capmount, Red | 25 | 1/Pack | 20/Pack |
| 20778 | 3015093 | Capmount, Black | 27 | 1/Pack | 20/Pack |



20776 (Hard hat and face shield not included)

EAR MUFFS — PREMIUM CAP MOUNTED

HPS428 Premium Cap Mounted Ear Muffs

- Designed to mount on to most brands of slotted hard hats
- Cup pads are soft and comfortable ideal for extended use
- Strong stainless steel wire swivel fork arms ensure strength and durability
- Easily adjustable for quick and convenient positioning
- One of the highest NRR ratings for a cap-mounted muff (28 dB)
- Independently tested/certified to NRR 28 (ANSI S3.19)
- CSA Class A

| PRODUCT NO. | Cup Color | Head Band | NRR Rating | Pkg. Qty | Case Qty. |
|-------------|-----------|---------------|------------|----------|-----------|
| \$23409 | Black/Red | Soft EVA Foam | 28 dB | 10/Box | 60 |





20776



20777



20778





S23409 (Hard hat not included)





Jackson Safety® Hard Hat Portfolio



Hard hat customization now available on fully automated equipment.

Types & Class Standards

Protective hard hats are classified according to the specific impact and electrical performance requirements they are designed to meet. All protective hard hats in accordance with this standard shall meet Type I impact requirements. In addition, all hard hats are further classified as meeting Class C, Class G, or Class E electrical requirements.

Impact Types

Type I: Hard hats intended to reduce the force of impact resulting from a blow only to the top of the head.

Type II: Hard hats intended to reduce the force of impact resulting from a blow which may receive limited protection odd center, lateral, or to the top of the head.

Electrical Classes

Class C (Conductive): Class C hard hats are not intended to provide protection against contact with electrical conductors. Class G (General): Class G hard hats are intended to reduce the danger of contact exposure to low-voltage conductors. Test samples are proof-tested at 2,200 volts (phase to ground). However, this voltage is not as an indication of the voltage at which the hard hat protects the wearer.

Class E (Electrical): Class E hard hats are intended to reduce the danger of exposure to higher-voltage conductors. Test samples are proof-tested at 20,000 volts (phase to ground). However, this voltage is not intended as an indication of the voltage at which the hard hat protects the wearer.

Optional Standards

Reverse Donning: Reverse-wearing option hard hats must pass force transmission requirements whether they are worn facing frontward or backwards in accordance with the manufacturer's wearing instructions.

JACKSON®

HEAD PROTECTION — CLIMBING STYLE INDUSTRIAL HARD



CH HARD HATS — INDUSTRIAL "CLIMBING" STYLE









CH-400V "Climbing Inspired" Industrial Hard Hat — Vented

- Introducing Jackson's new ultra-modern "climbing inspired" industrial hard hat
- $\bullet \ \ \, \text{Lightweight, molded from high-quality ABS materials}$
- Unique sliding vent hole system allows operator to open vents when working in direct sun/hot dry climates — or closed when used in cold or rainy conditions
- Super comfortable 6 pt. ratcheting suspension fits head sizes 6-1/2 to 8
- Rapid-Dial ratcheting headgear just grab and adjust, even with gloves on
- Comfortable and convenient chin strap with molded chin cup for added security
- Comfortable, replaceable sweatband
- More comfortable than "traditional" hard hats
- Four external clips are strategically positioned to securely fasten elastic straps found on LED lighting systems
- Slotted adapters allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adapters, ear muffs and Safe 2 System
- Multiple accessories available, including ear muffs and face shield adaptor systems
- Dual rear slots allow use of optional red reflector for improved safety
- Hi-vis reflective tape kit available for added safety
- Ideal for at-height and scaffolding work, confined space applications, construction sites requiring chin straps, and general all-around head protection
- Meets ANSI Z89.1, Type 1, Class C

| PRODUCT NO. | Color | Suspension | Case Count |
|-------------|--------------|------------------|------------|
| 20920 | White | 6 pt. Rapid Dial | 20 |
| 20921 | Yellow | 6 pt. Rapid Dial | 20 |
| 20923 | Orange | 6 pt. Rapid Dial | 20 |
| 20926 | Hi-Vis Green | 6 pt. Rapid Dial | 20 |
| 20927 | Black | 6 pt. Rapid Dial | 20 |

HEAD PROTECTION — CLIMBING STYLE INDUSTRIAL HARD

CH-300 "Climbing-Inspired" Industrial Hard Hat — Non-Vented

- Introducing Jackson's new ultra-modern "Climbing-Inspired" industrial hard hat
- Lightweight, molded from high density polyethylene (HDPE)
- Super comfortable 6 pt. ratcheting suspension fits head sizes 6-1/2 to 8
- Rapid-Dial ratcheting headgear just grab and adjust, even with gloves on
- Comfortable and convenient chin strap with molded chin cup for added security
- Comfortable, replaceable sweatband
- More comfortable than "traditional" hard hats
- Four external clips are strategically positioned to securely fasten elastic straps found on LED lighting systems
- Slotted adapters allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adapters, ear muffs, and Safe 2 System
- Hi-vis reflective tape kit available for added safety
- Ideal for at-height and scaffolding work, confined space applications, construction sites requiring chin straps, and general all-around head protection
- Meets ANSI Z89.1, Type 1, Class C, G, E, and EN397 European Standards

| PRODUCT NO. | Color | Suspension | Case Count |
|-------------|--------------|------------------|------------|
| 20900 | White | 6 pt. Rapid Dial | 20 |
| 20901 | Yellow | 6 pt. Rapid Dial | 20 |
| 20903 | Orange | 6 pt. Rapid Dial | 20 |
| 20906 | Hi-Vis Green | 6 pt. Rapid Dial | 20 |
| 20907 | Black | 6 pt. Rapid Dial | 20 |

| 20707 | Didek | o pt. Napia Diai | 20 |
|---------------------------------|--|-----------------------|------------|
| REPLACEMENT PARTS & ACCESSORIES | Description | | Case Count |
| 20930 | Replacement Ratcheting Headgear (CH- | 300 and CH-400V) | 20 |
| 20933 | CH-300/CH-400V Cap Adapter with Univ Window Mounting System | versal Pin Pattern | 20 |
| 20931 | Replaceable Sweatbands | | 20/Pack |
| 20932 | Replacement Chin Strap for CH-300 and | CH-400V | 1/Pack |
| 16797 | Safe 2 Face Shield/Ear Muff Bracket (only | y) | 1/Pack |
| 16150 | JLHL-150 150 Lumen COB 3-Function IP: | 54 Swivel Headlamp | 12 |
| 16250 | JUHL-250 250 Lumen SMD/COB 4-Funct | ion USB IP54 Headlamp | 24 |
| 20936 | Red Reflector (Mounts to CH-400V Dual | Rear Slots) | 1/Pack |
| 20937 | Hi-Vis Reflective Tape Kit for any Hard Ha | at Model | 1/Pack |
| | | | |



Capmount H70 Ear Muff 20776, 20777, 20778 (Hard hat and ear muffs sold separately)



20933



NEW!

COMING SOON!









16797 Face shield and ear muffs sold separately





20937 (Hard hat sold separately)




JACKSON®

HEAD PROTECTION — FULL BRIM HARD HATS



SPEED DIAL

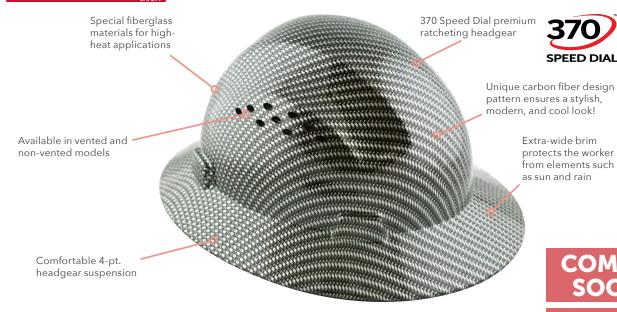

BLOCKHEAD® FG — NEW! PREMIUM FIBERGLASS FULL-BRIM HARD HATS



Blockhead FG Fiberglass Full Brim Hard Hat — Non-Vented

- Contoured dome shape with modern stylish ridgeline for unique identification
- Wrap-around brim further protects the worker from elements such as sun and rain
- Molded from special fiberglass materials great for general and high heat applications
- Features Jackson's 370 Speed Dial ratcheting headgear an industry best!
- 4 pt. ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Wrapped using a special water transfer decal to portray a stylish "composite" look
- A premium wide brim hard hat
- Meets ANSI Z89.1, Class C, G, and E





Chin strap sold separately



Blockhead FG Fiberglass Full Brim Hard Hat — Vented

- Same great features as non-vented version, but features vent holes to reduce heat build-up when working in direct sun and hot climates
- Vent holes reduce heat build-up when working in direct sun, hot climates and high-heat applications such as foundry and steel mill work environments
- Meets ANSI Z89.1, Class C

| PRODUCT NO. | Color | Suspension | Case Count |
|-------------------|---|----------------------|------------|
| 20620 | Composite Wrap | 4 pt. 370 Speed Dial | 20 |
| REPLACEMENT PARTS | Description | | Case Count |
| 20630 | Replacement Ratcheting Headgear (Block) | nead FG Series) | 12 |
| 20931 | Replaceable Sweatbands | | 20/Pack |
| 20832 | Optional Chin Strap | | 1/Pack |

HEAD PROTECTION — FULL BRIM HARD HATS







BLOCKHEAD® — PREMIUM FULL-BRIM HARD HATS

COMING SOON!

Blockhead® Series Full Brim Hard Hat — Non-Vented

- Classic smooth dome shape for improved impact deflection
- Wrap-around brim further protects the worker from elements such as sun and rain
- Lightweight, molded in the **USA** from high density polyethylene (HDPE)
- Features Jackson's 370 Speed Dial ratcheting headgear an industry best!
- Superior 6 pt. ratchet suspension offers premium comfort and safety
- Fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Meets ANSI Z89.1, Class C, G, and E

| PRODUCT NO. | | Color | Suspension | Case Count |
|-------------------|----------|------------------|----------------------|------------|
| 20697 | | White | 6 pt. 370 Speed Dial | 10 |
| 20698 | | Yellow | 6 pt. 370 Speed Dial | 10 |
| 20699 | | Blue | 6 pt. 370 Speed Dial | 10 |
| 20701 | | Orange | 6 pt. 370 Speed Dial | 10 |
| 20702 | | Red | 6 pt. 370 Speed Dial | 10 |
| 20718 | | Green | 6 pt. 370 Speed Dial | 10 |
| 20738 | | Hi-Vis Orange | 6 pt. 370 Speed Dial | 10 |
| REPLACEMENT PARTS | Old Code | Description | | Case Count |
| 20703 | 3014879 | 6 pt. Suspension | | 6 |
| 14429 | 3000105 | Sweatband | | 12/Bag |
| 14937 | 3002430 | 2 pt. Chin Strap | | 12/Bag |
| | | | | |









6 pt. suspension





20802









Chin strap sold separately

HEAD PROTECTION — FULL BRIM HARD HATS

COMING SOON!


GOOD


Advantage Series Full Brim Hard Hat — Non-Vented

- Contoured dome shape with modern stylish ridgeline for unique identification
- Wrap-around brim further protects the worker from elements such as sun and rain
- Lightweight, molded from high density polyethylene (HDPE)
- 4 pt. easy-dial ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Our most economical full brim hard hat
- Meets ANSI Z89.1, Type 1, Class C, G, and E

| PRODUCT NO. | Color | Suspension | Case Count |
|-------------|---------------|------------------|------------|
| 20800 | White | 4 pt. Rapid Dial | 20 |
| 20801 | Yellow | 4 pt. Rapid Dial | 20 |
| 20802 | Blue | 4 pt. Rapid Dial | 20 |
| 20803 | Orange | 4 pt. Rapid Dial | 20 |
| 20804 | Red | 4 pt. Rapid Dial | 20 |
| 20805 | Hi-Vis Orange | 4 pt. Rapid Dial | 20 |

Advantage Series Full Brim Hard Hat — Vented








| PRODUCT NO. | Color | Suspension | Case Count | | | | |
|-------------------|--|--|------------|--|--|--|--|
| 20820 | White | 4 pt. Rapid Dial | 20 | | | | |
| 20821 | Yellow | 4 pt. Rapid Dial | 20 | | | | |
| 20822 | Blue | 4 pt. Rapid Dial | 20 | | | | |
| 20823 | Orange | 4 pt. Rapid Dial | 20 | | | | |
| 20824 | Red 4 pt. Rapid Dial | | 20 | | | | |
| 20825 | Hi-Vis Orange | Hi-Vis Orange 4 pt. Rapid Dial | | | | | |
| REPLACEMENT PARTS | Description | | Case Count | | | | |
| 20230 | Replacement Ratcheting Headgear (Advanta | eplacement Ratcheting Headgear (Advantage Series Front Brim and Full Brim) | | | | | |
| 20931 | Replaceable Sweatband | eplaceable Sweatband | | | | | |
| 20832 | Optional Chin Strap | | 1/Pack | | | | |
| | | | | | | | |

HEAD PROTECTION — CAP-STYLE SLOTTED HARD HATS

SOON!

Advantage Series Cap-Style Slotted Hard Hat — Non-Vented




- Longer bill for improved protection from sun and falling debris
- Built-in rain trough helps shed water away from the neck
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors and Vibe ear muffs
- Lightweight, molded from high density polyethylene (HDPE)
- 4 pt. easy-dial ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Our most economical cap style hard hat
- Meets ANSI Z89.1, Type 1, Class C, G, and E



| PRODUCT NO. | Color | Suspension | Case Count |
|-------------|---------------|------------------|------------|
| 20200 | White | 4 pt. Rapid Dial | 20 |
| 20201 | Yellow | 4 pt. Rapid Dial | 20 |
| 20202 | Blue | 4 pt. Rapid Dial | 20 |
| 20203 | Orange | 4 pt. Rapid Dial | 20 |
| 20204 | Red | 4 pt. Rapid Dial | 20 |
| 20205 | Hi-Vis Orange | 4 pt. Rapid Dial | 20 |

Advantage Series Cap-Style Slotted Hard Hat — Vented

- Contoured dome shape with modern stylish ridgeline for unique identification
- Longer bill for improved protection from sun and falling debris
- Built-in rain trough helps shed water away from the neck
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors and Vibe ear muffs
- Lightweight, molded from high density polyethylene (HDPE)
- 4 pt. easy-dial ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Our most economical cap style hard hat
- Vent holes reduce heat build-up when working in direct sun and hot climates
- Meets ANSI Z89.1, Type 1, Class C

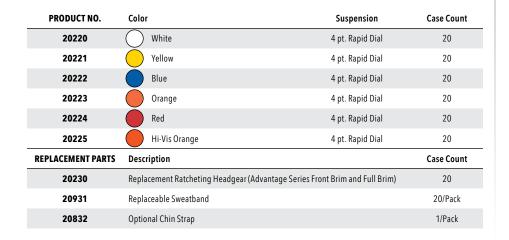











GOOD



JACKSO



Chin strap sold separately



20220





Chin strap sold separately

Table of Contents



SC-6 — PREMIUM CAP-STYLE HARD HAT







SC-6 Cap-Style Slotted Hard Hat — Non-Vented

- Classic smooth dome shape for improved impact deflection
- Longer bill for improved protection from sun and falling debris
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors and ear muffs
- Lightweight, molded in the **USA** from high density polyethylene (HDPE)
- Meets reverse donning standards
- 4 pt. ratchet suspension fits head sizes 6-1/2 to 8
- $\bullet \ \ \text{Features Jackson's } \textbf{370 Speed Dial} \ \text{ratcheting headgear} -- \text{an industry best!}$
- Comfortable, replaceable sweatband
- Our most popular hard hat!
- Meets ANSI Z89.1, Type 1, Class C, G, and E
- CSA certified to CSA Z94.1, Type 1, Class E







Reverse donning

| PRODUCT NO. | Old Code | Color | Suspension | Case Count |
|-------------------|----------|------------------|----------------------|------------|
| 14833 | 3001987 | Yellow | 4 pt. 370 Speed Dial | 12 |
| 14834 | 3001988 | White | 4 pt. 370 Speed Dial | 12 |
| 14836 | 3001989 | Brown | 4 pt. 370 Speed Dial | 12 |
| 14839 | 3001990 | Green | 4 pt. 370 Speed Dial | 12 |
| 14838 | 3001991 | Blue | 4 pt. 370 Speed Dial | 12 |
| 14839 | 3001992 | Orange | 4 pt. 370 Speed Dial | 12 |
| 14841 | 3001993 | Red | 4 pt. 370 Speed Dial | 12 |
| 14842 | 3001994 | Gray | 4 pt. 370 Speed Dial | 12 |
| 14843 | 3001996 | Hi-Vis Orange | 4 pt. 370 Speed Dial | 12 |
| REPLACEMENT PARTS | | Description | | Case Count |
| 14936 | 3002428 | 4-pt. Suspension | | 6 |
| 14937 | 3002430 | 2-pt. Chin Strap | | 12/Bag |
| 14958 | 3002459 | Sweatband | | 25/Bag |



JACKSON®



14409



6 pt. Ratchet Suspension

HEAD PROTECTION — CAP-STYLE SLOTTED HARD HATS

Sentry III[®] Cap-Style Slotted Hard Hat — Non-Vented

- Low profile, silhouette-styled hard hat
- Longer bill for improved protection from sun and falling debris
- Flat, customizable front area
- Low riding nape strap
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors and ear muffs
- Lightweight, molded in the **USA** from high density polyethylene (HDPE)
- Meets reverse donning standards
- 6 pt. ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Meets ANSI Z89.1, Type 1, Class C, G, and E










Reverse donning

| PRODUCT NO. | Old Code | Color | Suspension | Case Count |
|-------------------|----------|------------------|------------------|------------|
| 14407 | 3000061 | Yellow | 6 pt. Ratcheting | 12 |
| 14409 | 3000064 | White | 6 pt. Ratcheting | 12 |
| 14416 | 3000072 | Blue | 6 pt. Ratcheting | 12 |
| 14418 | 3000075 | Red | 6 pt. Ratcheting | 12 |
| 14420 | 3000078 | Orange | 6 pt. Ratcheting | 12 |
| 14423 | 3000085 | Hi-Vis Orange | 6 pt. Ratcheting | 12 |
| REPLACEMENT PARTS | | Description | | |
| 14426 | 3002428 | 6-pt. Suspension | | 6 |
| 14429 | 3002459 | Sweatband | | 12/Bag |
| 14434 | 3002430 | 2-pt. Chin Strap | | 25/Bag |
| 18446 | 3009653 | 4-pt. Chin Strap | | 12/Bag |



HEAD PROTECTION — CAP-STYLE SLOTTED HARD HATS

Charger® Cap-Style Slotted Hard Hat — Non-Vented





- $\bullet \;\;$ Built-in rain trough helps shed water away from the neck
- Slotted adaptors allow use with multiple Jackson and Sellstrom hard hat accessories including face shield adaptors & ear muffs
- Lightweight, molded in the **USA** from high density polyethylene (HDPE)
- Meets reverse donning standard
- 4 pt. ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Meets ANSI Z89.1, Type 1, Class C, G, and E



Reverse donning



BETTER

MADE IN

| PRODUCT NO. | Old Code | Color | Suspension | Case Count |
|-------------------|----------|------------------|------------------|------------|
| 20392 | 3013362 | White | 4 pt. Ratcheting | 12 |
| 20393 | 3013363 | Blue | 4 pt. Ratcheting | 12 |
| 20394 | 3013364 | Red | 4 pt. Ratcheting | 12 |
| 20395 | 3013365 | Hi-Vis Orange | 4 pt. Ratcheting | 12 |
| 20397 | 3013367 | Gray | 4 pt. Ratcheting | 12 |
| 20398 | 3013368 | Orange | 4 pt. Ratcheting | 12 |
| 20401 | 3013370 | Yellow | 4 pt. Ratcheting | 12 |
| 20403 | 3013372 | Neon Pink | 4 pt. Ratcheting | 12 |
| REPLACEMENT PARTS | | Description | | Case Count |
| 14429 | 3000105 | Sweatband | | 12/Bag |
| 14434 | 3000114 | 2-pt. Chin Strap | | 25/Bag |
| 18446 | 3009653 | 4-pt. Chin Strap | | 12/Bag |
| 20422 | 3013403 | 4-pt. Suspension | | 6 |





4 pt. Ratchet Suspension

surewerx.com/usa Table of Contents 165





(14809-14816)

It's as Easy as 1, 2, 3!

1

Order Jackson Safety's C10 bump cap with face shield adaptor (20186-20192)





2 Attach our new Jackson Safety 8" x 15.5" x .035" Shape E/N face shield window with anti-fog coating (28764)





You're safe to go with a complete bump cap, adaptor and anti-fog face shield kit!



HEAD PROTECTION — BUMP CAPS

Jackson Bump Caps, Adaptors, and Window Solutions

C10 Bump Cap Series (Bump Caps only)

- Bump caps are used to protect your head from minor bumps and scalp lacerations
- 4 pt. pin-lock suspension fits head sizes 6-1/2 to 8-1/4
- Features an absorbent brow pad for added comfort
- Can be customized with your company logo and branding needs
- Please note: To convert an existing bump cap for use with a face shield, use 14946
 Jackson hard hat adaptor with 29107 8" x 15.5" x .035" PETG anti-fog window

| PRODUCT NO. | Cap Color | Suspension | Case Qty. |
|-------------|-----------|------------|-----------|
| 14809 | Yellow | Pinlock | 12 |
| 14811 | White | Pinlock | 12 |
| 14812 | Green | Pinlock | 12 |
| 14813 | Blue | Pinlock | 12 |
| 14814 | Orange | Pinlock | 12 |
| 14815 | Red | Pinlock | 12 |
| 14816 | Gray | Pinlock | 12 |

C10 Bump Cap Series c/w Face Shield Attachment



MADE IN

- Same great features as above but includes an installed face shield adaptor
- Exclusive attachment converts your bump cap into a cap/face shield combo
- Uses Jackson windows:
 - 28764 8" x 15.5" x .035" clear PETG anti-fog window (Recommended)
 - 28765 6" x 15.5" x .040" clear PETG window
- Model #28765 does not meet ANSI Z87.1 standards due to coverage limitations

Please note: Windows sold separately

| PRODUCT NO. | Cap Color | Suspension | Case Qty. |
|-------------|-----------|------------|-----------|
| 20186 | White | Pinlock | 12 |
| 20187 | Yellow | Pinlock | 12 |
| 20188 | Blue | Pinlock | 12 |
| 20189 | Green | Pinlock | 12 |
| 20191 | Red | Pinlock | 12 |
| 20192 | Orange | Pinlock | 12 |
| 20193 | Gray | Pinlock | 12 |

C10 Bump Cap Replacement Parts

| PRODUCT NO. | Description | Case Qty. |
|-------------|------------------|-----------|
| 20194 | 4 pt. Suspension | 6 |
| 18428 | Sweatband | 12/Bag |

Universal Fit Adaptor & Window

Did you know? Our Jackson Safety 14946 universal hard hat adaptor fits most bump caps on the market. Use this adaptor along with our new 29107 **anti-fog** window to quickly convert your bump cap into a bump cap/face shield system



14946

Universal fit hard hat/ bump cap adaptor – uses universal pin pattern window mounting system



29107

8" x 15.5" x.035" PETG Shape E Anti-fog

166

HEAD PROTECTION — COWBOY HARD HAT

Western Outlaw® Hard Hat

- Popular cowboy-style hard hat offers unique style and image
- 4 pt. ratchet suspension fits head sizes 6-1/2 to 8
- Comfortable, replaceable sweatband
- Meets ANSI Z89.1, Type 1, Class C, G, and E

| PRODUCT NO. | Old Code | Color | Suspension | Case Count |
|-------------------|----------|------------------|------------|------------|
| 17330 | 3007313 | Black | Ratcheting | 4 |
| 19500 | 3010943 | White | Ratcheting | 4 |
| 19502 | 3010944 | Tan | Ratcheting | 4 |
| REPLACEMENT PARTS | | Description | | Case Count |
| 14429 | 3000105 | Sweatband | | 12/Bag |
| 14459 | 3000187 | 4-pt. Suspension | | 6 |





JACKSON°



19502





HARD HAT CUSTOMIZATION PROGRAM

Did you know? SureWerx recently acquired new, state-of-the-art automated hard hat customization equipment, allowing corporate logo placement on all Jackson brand hard hats.







Contact your local Jackson distributor for complete details.



39477



38423

38424







HEAD PROTECTION — HARD HAT ACCESSORIES

Hard Hat Interchange System for Slotted Hard Hats

- One-button action for quick release, even with gloves on
- Vertical lock-in eliminates helmet/face shield creep
- $\bullet \ \ \mathsf{Audible} \ \mathsf{click} \mathsf{know} \ \mathsf{your} \ \mathsf{PPE} \ \mathsf{is} \ \mathsf{assembled} \ \mathsf{correctly} \ \mathsf{without} \ \mathsf{visual} \ \mathsf{inspection}$
- Keep your hard hat ANSI Z98.1 Class E rated with dielectric Hard Hat Interchange System
- Accommodates all Jackson Safety® face shields, HSL Series hoods, Halo X hoods and Nitro® hoods
- $\bullet \ \ \text{Allows operator to quickly change from face shield to welding helmet protection in seconds!}$
- A Jackson Safety® exclusive

| CODE | Description | Case Count |
|-------|--|---------------|
| 39477 | HHIS Master Kit contains all components necessary to mount welding helmets and face shields to your hard hat | 6 |
| 38423 | Replacement HHIS Knobs for 14425/14235/14238 QUAD 500™ | 6 |
| 38424 | Replacement HHIS Knobs for 14202/14203 MAXVIEW™ and 14260/14262 F4XP | 6 |
| 38425 | HHISFaceShieldKitcontainsallcomponentsnecessarytomountfaceshieldstoyourhardhat | 6 |
| 38426 | $HHIS\ Welding\ Helmet\ Kit\ contains\ all\ components\ necessary\ to\ mount\ welding\ helmets\ to\ your\ hard\ hat$ | 6 |
| 39476 | Replacement Mounting Blades for SC-6 Series Hard Hats | 6 |





| JACKSON HARD HAT ACCESSORY COMPATIBILITY CHART | | | | | | | | | | |
|--|--------|---------|------------------------|---------|-----------|------|------------------------|--------------|-----------------|------------------|
| Hard Hat Interchange System | СН-300 | CH-400V | ADVANTAGE CAP STYLE | CHARGER | SENTRYIII | SC-6 | ADVANTAGE FULL BRIM | BLOCKHEAD II | BLOCKHEAD FG | C10 BUMP CAPS |
| 14939/14941 87 Mounting Blades 14949 82 B Cap Adaptor | | | 1 | 1 | 1 | ١ | | | | |
| 14947 437 Cap Adaptor | | | 1 | 1 | 1 | 1 | | | | |
| 14944 382-B Cap Adaptor | | | 1 | 1 | 1 | 1 | | | | |
| 14391 Model P Cap Adaptor | | | 1 | 1 | 1 | 1 | | | | |
| 14948 Model 137 Cap Adaptor | | | 1 | 1 | 1 | 1 | | | | |
| 14390 Model C Cap Adaptor | | | 1 | 1 | 1 | 1 | | | | |
| 14943 Model 282-B Cap Adaptor | | | | | | | | | | |
| 14942 Model 182-B Cap Adaptor | | | 1 | 1 | 1 | 1 | | | | |
| 14946 Model 337 Cap Adaptor | J | 1 | 1 | 1 | 1 | J | | | | 1 |
| 14505 Model A-5500SN Cap Adaptor | | | 1 | 1 | J | J | | | | |
| 14506 Model A-5500X Capshield | | | | 1 | J | J | | | | |
| 14393 Model H Cap Adaptor | | | | | | | 1 | 1 | 1 | |
| 14945 Model 37 Cap Adaptor | | | | | | | 1 | 1 | J | |
| S61602 Cap Adaptor | | | | | | | 1 | 1 | J | |
| S61900 Cap Adaptor | J | 1 | 1 | 1 | 1 | 1 | | | | 1 |
| S61600 Cap Adaptor | | | 1 | 1 | 1 | 1 | | | | 1 |
| S61601 Cap Adaptor | | | | | | | 1 | 1 | 1 | |
| S61610 Cap Adaptor | | | 1 | 1 | 1 | 1 | | | | |
| S61970 Universal Slot Adapter (USA) | J | 1 | 1 | 1 | 1 | 1 | | | | |
| 16797 Safe 2 System | J | 1 | 1 | 1 | 1 | 1 | | | | |
| 20774 H70 Vibe Ear Muffs Capmount Series | J | 1 | 1 | 1 | 1 | 1 | | | | |
| S23409 Ear Muffs | 1 | 1 | 1 | 1 | 1 | 1 | | | | |
| 14202/14203 Maxview — HHIS | 1 | 1 | ** | 1 | 1 | 1 | | | | |
| 14225/14235/14238 Quad 500 — HHIS | 1 | 1 | ** | 1 | 1 | 1 | | | | |
| DP4 — USA Adaptor | | | * | * | * | * | | | | |
| 380/390 Series — USA | J | J | 1 | 1 | J | 1 | | | | |
| 20933 Climbing Hard Hat Adaptor | 1 | J | 1 | 1 | J | J | | | | |

^{*} Reverse Donning only **New HHIS version coming 2021

Drybrow Sweatband

- $\bullet \ \ \text{Keeps you cool and prevents perspiration from running into your eyes in hot and humid conditions}$
- Ideal for all applications where workers need to be kept cool and comfortable
- Individually sleeved for increased shelf life and vending machine incorporation
- Finished dimensions: 8.7" long x 1.6" wide x 5mm thick

| PRODUCT NO. | Old Code | Description | Case Qty. | |
|-------------|----------|-------------------|-----------|--|
| 16750 | 3005344 | Drybrow Sweatband | 25/Bag | |







14494



14496



14497



14502



14499

HARD HAT ACCESSORIES

AA-7 Windgard® Head Protection

- Snug fitting cap style fits over most partial brim hard hats
- Keeps wind out, traps warmth, and prevents moisture build-up
- Made with dielectric material to allow use near electrical hazards
- Provides warmth for temperatures from 32° to 0°F (0°to -20°C)

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|-----------------|-----------|
| 14494 | 3000434 | AA-7, Navy Blue | 12/Pack |
| 14495 | 3000435 | AA-7, Orange | 12/Pack |
| 16756 | 3005341 | AA-7, Red | 12/Pack |

AA-8 Windgard® Head Protection

- Fits over most full brim style hard hats
- Keeps wind out, traps warmth, and prevents moisture build-up
- Made with dielectric material to allow use near electrical hazards
- Provides warmth for temperatures from 32° to 0°F (0°to -20°C)

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|-------------|-----------|
| 14496 | 3000436 | AA-8, Red | 12/Pack |

AA-9 Windgard® Head Protection

- Warmth for temps 0° to -20°F (-20°to -28°C)
- Full face and neck model protects mouth and cheeks
- Fits over most safety caps

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|-----------------|-----------|
| 14497 | 3000434 | AA-9, Navy Blue | 12/Pack |

SEASONAL WINTERLINERS

225 Plus Winterliner

- Can be worn under caps and hats
- Hook-and-loop fastener for a comfortable, close fit
- Outer shell: quilted nylon with extra-thick foam fill
- Lining: polyester fleece
- Meets 16 CFR 1610, Class 1

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|----------------------|-----------|
| 14502 | 3000442 | 225 Plus Winterliner | 12/Pack |

325 Ultra Winterliner

- Ideal for cold weather environments
- Can be worn over hearing products
- Top section is flame-retardant
- Bottom section is flame-resistant
- Detachable bottom section is double-layered, heavy-spun polyester
- Nape piece closes with two buttons
- **Top shell:** cotton twill
- Lining: brushed 100% polyester fleece (top only)
- Bottom shell: double nylon knit
- Meets 16 CFR 1610, Class 1

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|-----------------------|-----------|
| 14499 | 3000439 | 325 Ultra Winterliner | 3/Pack |

SEASONAL WINTERLINERS

400 Ultra Winterliner

- Ideal for extreme cold weather environments
- Full head and neck coverage with extra-long nape and wraparound collar
- Shoulder length that can be tucked into jacket
- Outer shell: cotton twill
- Lining: polyester sherpa
- Meets 16 CFR 1610, Class 1

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|-----------------|-----------|
| 14501 | 3000441 | 400 Winterliner | 3/Pack |

Wind Jammer IV

- Ideal for extreme cold weather environments
- Long nape and wraparound design provides extra warmth and a snug fit
- Silver with black fastener straps and elastic border stitching
- Meets 16 CFR 1610, Class 1

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|----------------|-----------|
| 16760 | 3005346 | Wind Jammer IV | 6/Pack |





14501



16760

FLASH-TEX® LINERS

Flash-Tex® liners are designed to assist in complying with OSHA 1910.269.

FLASH-TEX® LINERS — 650 NPR AND 695 NPR

| Flame-Resistant | | Laundering Data | | Char Length [†] | |
|---|---------------------------------|-----------------------------|---|--------------------------|-------|
| Outer Shell | Inner Shell | Outer Shell | Inner Shell | Outer | Inner |
| Nomex [®] Inherently flame-resistant | Proban® durable flame-resistant | FR properties last lifetime | Retains FR properties up to 25 industrial washes or 50 domestic washes | 2.4 | 3.5 |

Note: Data obtained from material manufacturers' testing. For additional technical information, contact Customer Service.

†The length of brittle residue when material is exposed to thermal energy

305 TSL Winterliner

- Ideal for cold-weather environments
- Full head and neck coverage with extra-wide wrapped collar
- Shoulder-length liner can be tucked into jacket

| PRODUCT NO. | Old Code | Description | Case Qty. | |
|-------------|----------|---------------------|-----------|--|
| 14503 | 3000443 | 305 TSL Winterliner | 3/Pack | |

695 NPR Winterliner

- Ideal for very cold weather environments
- Full head and neck liner with wide wraparound collar
- Universal to fit all head sizes
- Leather/Nomex® tabs attach to hard hats
- Provides protection from electrical arc energy exposure
- Outer shell: retains FR protection throughout life of product 100% Nomex® IIIA
- $\bullet \quad \textbf{Inner shell:} \ \text{flame resistance through 25 industrial washes or 50 domestic washes} \\ -- 100\% \ \text{Proban}^{\text{@}} \ \text{cotton}$

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|---------------------|-----------|
| 16767 | 3005355 | 695 NPR Winterliner | 3/Pack |

Nomex® Head Winterliner

- 100% Nomex® double-layered, knitted hood provides extra protection around the face
- Full head and neck coverage with extra-wide collar
- Shoulder-length collar can be tucked into jacket
- $\bullet\,$ Can be worn under a hard hat or welding helmet as protection against flame and electrical arcs
- Retains FR protection throughout life of the product

| PRODUCT NO. | Old Code | Description | Case Qty. |
|-------------|----------|-------------|-----------|
| 14504 | 3000444 | Nomex® Hood | 12/Pack |



14503



16767



14504

Table of Contents



JACKSON SAFETY® RESPIRATORS

Jackson Safety® particulate respirators deliver the protection you expect and the comfort you need for all-day wear.

| R30 | N99 Particulate Respirator |
|-----|----------------------------|
| R20 | P95 Particulate Respirator |
| R10 | N95 Particulate Respirator |
| R05 | Disposable Dust Mask |



COLOR-CODED PARTICULATE DISPOSABLE RESPIRATORY PROTECTION

| Jackson Safety® Brand Respiratory Protection Products | | | | | | | | |
|---|-------------|------------------|-----|-----|------------|--------|-----|--------|
| Product | CODE | Protection Level | | | Color Code | | | Valve |
| | | N95 | P95 | N99 | Blue | Yellow | Red | |
| R05 | 12978 | | | | | | | None |
| R10 | 64230/64235 | • | | | • | | | None |
| R10 | 64240 | • | | | • | | | Single |
| R20 | 64420 | | • | | | • | | Single |
| R30 | 64520 | | | • | | | • | Single |



64235



The N95 Pouch-Style Respirator is designed to increase air flow for better breathability

Introducing

The New R10 N95 Standard For All-Day Comfort, Fit, and Safety!



That's right! Jackson Safety is pleased to introduce an all-new N95 NIOSH-approved foldable disposable respirator designed for maximum all-day comfort. When your job requires the wearing of a protective mask, our Jackson 64235 introduces a new ultra-soft, ultra-comfortable respirator that significantly reduces facial irritation and discomfort. The pouch-style breathing chamber offers exceptional breathability while at the same time ensuring a minimum 95% filtration efficiency.

Look at these outstanding features:

- Ultra-soft non-irritating lining offers superior comfort over traditional N95 respirators
- Pouch-style breathing chamber provides exceptional breathability check and compare!
- Two 1/2" extra-wide head straps and an adjustable nose clip further improves comfort and helps to ensure a tight facial seal, preventing leakage around the mask edges
- Nose clip reduces potential fogging of glasses and face shields
- Unlike traditional N95 masks, these respirators fold flat, reducing storage space requirements and shipping costs, as well as reducing the chance of product damage
- N95 NIOSH rating provides a minimum 95% filtration efficiency of 0.3 micron particles
- Features two layers of electrostatically treated melt-blown filter media,
- A single-use respirator designed for use by skilled professionals in critical environments who are mandated to wear specific PPE to protect against the transfer of aerosolized solid and non-oil based liquid/particulate matter
- Compatible with a variety of SureWerx protective eyewear and hearing protection
- Packed 50 per bag, 6 bags (300 pieces) per case
- Disclaimer: Not intended for medical use



| PRODUCT NO. | Description | Shape | Baq Qty. | Case Qty. |
|-------------|----------------------------|-------------|----------|----------------|
| 64235 | N95 Particulate Respirator | Pouch Style | 50 | 6 Bags/300 Pcs |

RESPIRATOR PROTECTION — DISPOSABLE RESPIRATORS

R05 Disposable Dust Mask

- Basic protection against non-toxic dust, household allergens, mold, and pollen
- Adjustable nose clip provides a secure fit
- Universal size
- Does not provide lung protection

| PRODUCT NO. | Description | Case Count | |
|-------------|-----------------------|-----------------------|--|
| 12978 | Disposable Dust Masks | 50/Box, 20 Boxes/Case | |



Due to overwhelming demand, please contact a SureWerx representative for delivery information.

R10 N95 Particulate Respirator

- Comfortable, soft foam nose pad
- Highly visible, color-coded straps
- Knitted elastic straps ultrasonically attached
- Not made with natural rubber latex
- Code 64240 meets heat and flame resistance per ANSI/ISEA 110-2009



| PRODUCT NO. | Description | Protection | Strap Color | Case Count |
|-------------|---|------------|-------------|----------------------|
| 64230 | N95 Particulate Respirator (No Valve) | N95 | Blue | 20/Box, 8 Boxes/Case |
| 64240 | N95 Particulate Respirator (Single Valve) | N95 | Blue | 10/Box, 8 Boxes/Case |

R20 P95 Particulate Respirator

- Effective against all oil based and non-oil based particulate aerosols and dust that do not emit harmful vapors
- Soft foam nose pad with bendable nose clip
- Highly visible, color-coded straps
- Knitted elastic straps ultrasonically attached
- Not made with natural rubber latex



| PRODUCT NO. | Description | Protection | Strap Color | Case Count |
|-------------|---|------------|-------------|----------------------|
| 64420 | P95 Particulate Respirator (Single Valve) | P95 | Yellow | 10/Box, 8 Boxes/Case |

R30 N99 Particulate Respirator

- Full perimeter foam inside mask
- Adjustable head straps
- Soft foam nose pad with bendable nose clip
- Highly visible, color-coded straps
- Knitted elastic straps ultrasonically attached
- Not made with natural rubber latex



| PRODUCT NO. | Description | Protection | Strap Color | Case Count |
|-------------|---|------------|-------------|----------------------|
| 64520 | N99 Particulate Respirator (Single Valve) | N99 | Red | 10/Box, 8 Boxes/Case |



64230



64420



64520



sellstrom.

KneePro

KNEE & ELBOW PROTECTION

COMFORTAL DAY

surewerx.com/usa Table of Contents 175



KNEE PADS — PREMIUM GRADE





KneePro Ultra Flex III Knee Pads

- Sellstrom's KneePro Ultra Flex III knee pads have been the industry standard for more than 30 years
- Simply the best knee pads made!
- The articulating hinged design ensures proper placement all day long set them once and forget you are even wearing them
- Soft elastic, extra-wide woven straps with reinforced sewn ends are placed well above and below the knee no Velcro, which contaminates over time
- Straps stay aligned with your legs in any position will not bind behind the knee
- Built with strong, flexible hard plastic outer shells that extend well above, below and to the inside/outside of the knee for added knee and leg protection
- Metal rivet hinge ensures long lasting protection while kneeling or walking
- On the outside, pads feature a perfectly placed curved non-marking Grip Strip
- Grip-Strip designed for use in all applications without gumming up
- Grip Strips are easily replaceable
- On the inside, pads offer a long lasting 5/8" closed cell foam pad for maximum comfort and protection (KneePro Ultra Flex III version)
- Sweat does not penetrate closed cell foam lasts longer and won't "stink"
- Our KneePro Hybrid Ultra Flex III version offers even greater user comfort and protection through the use of a three layer, 3/4"-thick closed cell foam pad with built-in gel packs the ultimate in knee protection!
- Virtually indestructible built for years of hard work and heavy use
- Specially designed Quick-Snap clips ensure quick and easy removal
- Comes in convenient, reusable mesh bag with one extra Quick-Snap clip
- Pads weigh only 9 oz. each
- Straps, Grip Strips, and speedklips are replaceable
- Excellent for welders, ship builders, roofers, construction workers, flooring installers, and anywhere hard-working knee pads are required

KNEE PADS — PREMIUM GRADE

KneePro Ultra Flex III Knee Pads

| PRODUCT NO. | Mod. No. | Shell Color | Grip Strip | Pkg. Qty. |
|-------------|----------|-------------|------------|-----------|
| \$96110 | KPUF03 | Gray | Orange | 6/24 Pair |
| \$96111 | KPUFO3-B | Black | Black | 6/24 Pair |
| \$96112 | KPUFO3-G | OD Green | OD Green | 6/24 Pair |
| \$96113 | KPUFO3-T | Tan | Tan | 6/24 Pair |
| S96114 | KPUF03-F | Foliage | Foliage | 6/24 Pair |

KneePro "Hybrid" Ultra Flex III Knee Pads

- The **KneePro Hybrid Ultra Flex III** offers all of the same legendary features as the KneePro Ultra Flex III pad but has the added advantage of a built-in gel pack for added comfort and fit
- This is the ultimate knee pad for extreme applications where users are on their knees for extraordinarily long periods of time
- Unlike many gel pads on the market, our gel packs are securely placed inside a three-layer, 3/4" closed cell foam knee protector compartment and are guaranteed to stay leak free
- Available with black shells and hi-vis orange Grip Strip

| PRODUCT NO. | Mod. No. | Shell Color | Grip Strip | Pkg. Qty. |
|-------------|----------|-------------|---------------|-----------|
| S96211 | KPUFO3-H | Black | Hi-Vis Orange | 6/24 Pair |



sellstrom_®



S96111



S96112



S96113



S96114

177

surewerx.com/usa Table of Contents

sellstrom.



S96110-7

KNEE PADS — SPECIALTY

FOR HIGH HEAT APPLICATIONS

Set

1 Pair (2 pcs.)

4 of Each

KneePr

KneePro Roofers Knee Pads

PRODUCT NO.

S96110-7

S96110-6

- The KneePro Roofers vented foam rubber knee pads are specially designed for the tough roofers industry
- Manufactured using a special grade of ultra-dense rubber, offering extreme durability
- Non-marring rubber leaves no transfer on surfaces

KNEE PADS — PREMIUM GRADE

KneePro Ultra Flex III Knee Pad Replacement Parts

- Inner pads are serrated, creating channels that allow air to flow through the pad
- These channels dissipate heat, creating a cooler working environment at the knee
- Ideal for roofers working in high-heat applications
- Straps are located to allow the calf muscle curvature to help hold the pads in place without pinching the knee joint
- The upper end of the pads is hooked upward and inward to help hold the pads in place on the knee

Description

KneePro III Replacement Grip Strips - Orange (PR)

Knee Pad Pro III Replacement Straps and Clips (Kit)

- Weight 1.25 lbs. per pad, 2.5 lbs. per pair
- Ideal for roofers, welders, and anyone kneeling on heated surfaces

| PRODUCT NO. | Mod. No. | Shell Color | Туре | Pkg. Qty. |
|-------------|----------|-------------|---------|-----------|
| \$96350 | KPVFR | Black | Roofers | 6/12 |



air flow, creating cooler working environment.



S96310

KNEE PADS — ADVANTAGE SERIES

KneePro ZeroGravity Lightweight Knee Pads

- The KneePro ZeroGravity knee pad is one of the lightest yet toughest knee pads on the market today weigh only 2 oz. each
- So light, you won't even know you have them on!
- The outer shell is made using a durable, heat-formed, non-marking material for maximum life
- The inner closed cell foam protective pad is a full 1/2" thick for superior comfort
- Pad is molded to contour of knee, which helps it to stay in place during use
- Revolutionary new fastening system pops in and out like a button for easy and convenient on/off action
- To adjust the strap, simply pull the strap end to a comfortable size
- $\bullet\;$ Extra-wide, soft woven elastic cloth strap for improved comfort and fit
- Economically priced but built for hours of long-lasting protection and comfort
- Ideal for roofing, plumbing, flooring, tiling, gardening, carpentry, electrical work, maintenance, and home repair

| PRODUCT NO. | Mod. No. | Shell Color | Pkg. Qty. |
|-------------|----------|-------------|-------------|
| \$96310 | KPZGO3 | Gray | 20/100 Pair |
| S96311 | KPZGO3-G | OD Green | 20/100 Pair |

ELBOW PADS — PREMIUM SERIES

ArmorPro Tactical Elbow Pad

ArmorPro

- The ArmorPro Tactical Elbow Pad is the ultimate in elbow and arm protection
- The 11" long, abrasion-resistant foam and rubber body protects most of your arm
- Secures to your body with comfortable extra-wide top and bottom cinch straps
- Pull tabs help with adjustment even when wearing gloves
- Pad stays in position until **you** decide to change or remove
- Body is extremely flexible, becoming an extension of your arm
- Elbow protecting cap slides up and down for personal adjustment, comfort, and fit:
 - Shift cap to upper position for arm protection during belly crawl, or
 - Lower position for sniper stand off your choice, your comfort
 - Tough grip cap holds your elbow in place on any surface
- Lightweight and cool only weighs 7 ounces (each pad)
- Available in four colors: Black, OD Green, Tan and Foliage/Coyote Brown

| PRODUCT NO. | Mod. No. | Shell Color | Pkg. Qty. |
|-------------|----------|-------------|--------------|
| \$96410 | KPAP07-B | Black | 6/12/24 Pair |
| \$96411 | KPAP07-G | OD Green | 6/12/24 Pair |
| \$96412 | KPAP07-T | Tan | 6/12/24 Pair |
| S96413 | KPAP07-F | Foliage | 6/12/24 Pair |



sellstrom_®



S96410



S96411



S96412



WARNING: K1 and Due North* traction aids help give you traction on ice, snow, or similar porous surfaces. However, because NO product can completely prevent a slip or fall on slippery surfaces, remember to exercise care when walking or running in K1 and Due North* traction aids. Caution should also be taken when moving on any hard or polished surface, such as granite or marble, on ladders, or when driving a vehicle. Use care, as these traction aids are sharp and may injure or damage flooring, surfaces, or skin. K1 and Due North* traction aids are not to be used for mountaineering or hiking, in rocky terrain, or when the user may encounter steep up or down slopes. K1 and Due North* traction aids are not designed or intended to be used on high heel footwear. This product contains latex.



KEEPING YOU
GROUNDED

SLIPS AND FALLS — THE #1 CAUSE OF WORKER'S COMPENSATION CLAIMS

THE CLEAR FACTS

More than **20,460** reported ice, sleet and snow related worker injuries in 2017 making up the majority of claims.

- U.S. Bureau of Labor Statistics

20.8% of emergency department visits and hospitalizations in the U.S. are due to slips and falls.

EHS Today, "The High Cost of Slips, Trips and Falls"

25% of slips and falls result in more than 31 days away from work.

- National Floor Safety Institute

#1

Cause of Worker's Compensation Claims

20.8% of Emergency Visits

31
Days of Work Loss

SUREWERX — THE #1 SUPPLIER OF PROFESSIONAL TRACTION AID SOLUTIONS IN AMERICA!

That's right. SureWerx offers the most complete range of traction aid solutions in North America, offering the original and industry-leading K1 mid-sole ice cleat brand, and the industry leader in full-sole and heel traction aids, Due North. Together, SureWerx offers the best one-two punch for all your traction aid needs. No matter the application, we have the solution!







SLIP-ON TRACTION AIDS— THE FASTEST GROWING CATEGORY IN SAFETY

GROWING INDUSTRY

As more EHS professionals become aware of the available solutions, we are seeing more companies implement ice cleat policy

Companies are mandating ice cleats for all employees, including ones that don't necessarily work outside (i.e., office employees in the parking lot)

THE NUMBERS ADD UP

Average cost of an ice-related slip and fall worker's compensation claim is \$48,000, according to the Maine Department of Labor

At \$30 a pair, a company can outfit 1600 employees with a pair of ice cleats and save money if one accident is prevented



MID-SOLE ICE CLEATS — THE MARKET DISRUPTOR

Since its development and introduction five short years ago, the K1 Series mid-sole ice cleat has revolutionized the slip protection market, preventing countless injuries across all industries and professions. K1, "The Grip that Changed the Game", is simply the most efficient method when transitioning from outdoors to indoors. It's easy and simple - just strap the mid-sole ice cleat to your foot wear (one size fits all). When in the down (active) position, the heavy-duty tungsten carbide spikes quickly penetrate icy surfaces, preventing slips and falls. When transitioning indoors, simply reach down and swivel the cleated area to the top of the footwear (inactive mode) to avoid damage to indoor surfaces. This innovative design is also great for use while driving! Drive with the ice cleat in the up (inactive) position, and down (active) when stepping out of the vehicle onto icy and slippery surfaces.







Manufacturing



Mining





Transportation

Slim

Low Profile

Original

High Profile



Flat-Sole Footwear







Aggressive Arch & Heel



SELECTION CHART



K1MID-BLK



K1MID-LP-BLK



K1MID-HP-BLK

CHOOSING THE CORRECT K1 SERIES™ MID-SOLE MODEL

It's very easy to determine which model best suits a company's employees with just a couple of questions:

| | NO | YES |
|---|-----------|--------------|
| Will the ice cleat be worn in a volatile environment? | Original | Intrinsic |
| E.g., Oil & Gas, Mining, Chemical, Refining | Original | intrinsic |
| What kind of footwear is being worn? | | |
| Traditional Heeled Work Boot | K1MID | K1MID-INT |
| Hiker Style or Tactical Boot | K1MID-LP | K1MID-INT-LP |
| Deep Treaded Boot | K1MID-HP | K1MID-INT-HP |
| Sneaker/No Heel | K1MID-SLM | |

K1 SERIES™ BLACK STRAP MODELS

NEW!

The K1 Mid-Sole Black Strap series offers a discreet option for winter traction, ideal for home care, government, military, law enforcement and first responders.




K1 SERIES™ TRACTION AIDS FOR ANY FOOTWEAR AND ANY JOB



ORIGINAL

Regular length studs —

Ideal for most work boots with a defined heel



Total height 15mm



K1MID Original



K1MID-INT Intrinsic




K1MID-BLKBlack Strap

LOW PROFILE

Low profile studs —

For footwear with shallow arches



Total height 11mm



K1MID-LPOriginal



K1MID-INT-LP Intrinsic




K1MID-LP-BLK Black Strap

HIGH PROFILE

High profile studs —

For boots with deep treads/high arches



Total height 18mm



K1MID-HP Original



K1MID-INT-HP Intrinsic




K1MID-HP-BLK Black Strap

185

SLIM

Ultra Low profile —

Patented duo-purpose indoor (non-cleated)/outdoor (cleated) mid-sole designed for flat-style footwear with little to no arches



MINISTER AND RECORDING OF THE PARTY OF THE P

K1MID-SLM



surewerx.com/usa Table of Contents



K1 INTRINSIC MADE DIFFERENT. MADE SMART

When 'Non-Sparking' Brass Studs Are Not Enough

Certification is important. That's why we've done the testing to keep your team safe. The K1 Intrinsic series is the ONLY Certified Intrinsically Safe ice cleat in North America.

Mandated and trusted by oil and gas, utilities, waste water and agriculture for the most volatile environments – where safety matters most.

| Burnable Material | USA (NEC) | Europe (IEC) |
|-------------------|------------------|---------------------------|
| Gas or vapor | Class I, DIv I | Zone 0, Zone 1, Zone 2 |
| Dust | Class II, Div I | Zone 20, Zone 21, Zone 22 |
| Fibers | Class III, Div I | Zone 20, Zone 21, Zone 22 |

In order to reach the required values of combined resistance for potentially explosive production environments, the K1 Mid-Sole Intrinsic Certified Spark-proof model must always be worn together with appropriate ESD footwear.



K1MID-INT



K1MID-INT-LP



K1MID-INT-HP



MORE THAN NON-SPARKING. K1 INTRINSIC ICE CLEATS



THE ONLY CERTIFIED INTRINSICALLY SAFE ICE CLEAT IN NORTH AMERICA!

K1 SLIM SERIES PATENTED DESIGN OFFERS SLIP PROTECTION INDOORS AND OUTDOORS



We listened. We innovated. Meet the new K1 Slim.

- Designed for flat-soled footwear like sneakers and safety shoes
- Ultra-thin design is comfortable and durable
- Made to be worn all day, indoors and out
- Ice-penetrating tungsten carbide studs
- One size fits all
- Outstanding traction




The K1 Slim democratizes winter traction. Whether you're in and out of the warehouse, conducting home-care visits, or walking from the parking lot to the office, K1 Slim is convenient, smart, and safe.



EASILY SWITCH BETWEEN:

- Proven K1 Tungsten Carbide Studs
- Reliable anti-slip indoor traction





THE GRIP THAT CHANGED THE GAME™

duenorth[®]

ICE TRACTION AIDS

Superior in all ways!

- $\bullet \ \ \text{Exclusive "military grade" tungsten carbide replaceable spikes for superior strength}$
- Extra-strong spike material allows Due North to use a smaller diameter spike, resulting in faster, easier ice penetration while ensuring longest life!





LEADING THE WAY FOR REPLACEABLE SPIKE ICE TRACTION AID PERFORMANCE

Due North® Winter Traction product is ideal for those who walk, run, or work outdoors and require more stability and increased traction. Whether you're an industrial worker or someone who just needs extra stability in winter conditions, the enhanced design and improved shape will give you the extra confidence you need when walking or running on icy and snow conditions. The increased traction will help with preventing slips and falls on ice and snow, which reduces the risk of pulled muscles, fractured bones, or even back problems caused by a quick slip or fall. When not in use, the compact design makes them easy to store in small places, such as your coat pocket, handbag, briefcase, or the glove box in your vehicle.






ICE TRACTION AIDS — HEAVY DUTY INDUSTRIAL









Textured "Diamond Knurling" lining grips footwear and helps keep traction aids in place

ICE TRACTION AIDS — HEAVY DUTY INTEGRATED SPIKES



The solution for extreme winter work environments to give you the utmost confidence on ice and snow.

- Introducing the new Due North Heavy Duty
- 40% more natural rubber provides maximum cut and abrasion resistance while ensuring maximum performance for the life of the product
- Additional features include a built-in retention strap for a more secure fit and molded-in spikes; no additional accessories or replacement spikes are needed
- In comparison to our current industrial grade product, the Heavy Duty has 28 molded-in military grade tungsten carbide spikes

| PRODUCT NO. | Old Code | Description | Strap Color | Spike Count | Size | Fits Men's Sizes | Fits Women's Sizes | Case Qty. |
|-------------|----------------|-------------|-------------|-------------|----------|------------------|--------------------|-----------|
| V3550570-S | heavydutya-sml | Heavy Duty | Black | 28/Pair | Small | 3-7 | 4-8 | 12 |
| V3550570-M | heavydutya-med | Heavy Duty | Black | 28/Pair | Medium | 7.5-10 | 8.5-11 | 12 |
| V3550570-L | heavydutya-Irg | Heavy Duty | Black | 28/Pair | Large | 10.5-13 | 11.5-13 | 12 |
| V3550570-XL | heavydutya-osd | Heavy Duty | Black | 28/Pair | Oversize | *see below | *see below | 12 |

 $[\]star$ Oversized fits sized and Pac boots size 10+ or standard footwear sizes 13.5-15.

duenorth[®]



Tungsten carbide replacement spikes 100 pk. V3550670-O/S



All-purpose carry pouch with belt loop V3550970-O/S



All-purpose retention strap V3550870-O/S

ICE TRACTION AIDS — REPLACEABLE SPIKES





All-Purpose Industrial

- "Military" grade tungsten carbide "replaceable" spikes maximize traction and performance
- Sixteen tungsten carbide spikes per pair our top-rated replaceable series for tough applications
- Heel pad features two extra spikes and enlarged heel coverage (versus All Purpose) for increased traction and stability
- Exclusive specially formulated 100% rubber provides maximizes flexibility and durability in extreme cold conditions
- Specially designed "Pulse Grip" tread pattern offers added traction characteristics maximum slip resistance
- Textured "Diamond Knurling" inner lining grips the footwear, keeping traction aids stable and in place
- Improved heel fit for improved performance
- Geometrically designed strap webbing and improved shape fit a greater variety of footwear these traction aids stay on!
- Features molded-in retention strap attachment points
- For even greater security and fit, Due North offers an optional retention strap (sold separately)
- Industrial grade sole offers unparalleled grip, maximum durability, and superior operator safety
- The all-round solution for tough work environments best for those who play hard and work harder outdoors.

| PRODUCT NO. | Old Code | Description | Strap Color | Spike Count | Size | Fits Men's Sizes | Fits Women's Sizes | Case Qty. |
|--------------|------------------|---------------------------|-------------|-------------|----------|------------------|--------------------------------------|-----------|
| V3550370-S | apindustrial-sml | All Purpose Industrial | Black | 16/Pair | Small | 4-7 | 5-8 | 12 |
| V3550370-M | apindustrial-med | All Purpose Industrial | Black | 16/Pair | Medium | 7.5-10 | 8.5-11 | 12 |
| V3550370-L | apindustrial-lrg | All Purpose Industrial | Black | 16/Pair | Large | 10.5-14 | 11.5-13 | 12 |
| V3550370-XL | apindustrial-osd | All Purpose Industrial | Black | 16/Pair | Oversize | *see below | *see below | 12 |
| V3550370-2XL | NEW! | All Purpose Industrial | Black | 16/Pair | Oversize | | ky footwear sizes ndard sizes 15+ | 12 |

^{*}Oversized fits sized and Pac boots size 10+ or standard footwear sizes 13.5-15.

ICE TRACTION AIDS — REPLACEABLE SPIKES







All-Purpose

- "Military" grade tungsten carbide "replaceable" spikes maximize traction and performance
- Twelve tungsten carbide spikes per pair excellent for general industrial applications
- Exclusive specially formulated 100% rubber provides maximizes flexibility and durability in extreme cold conditions
- Specially designed "Pulse Grip" tread pattern offers added traction characteristics maximum slip resistance
- Textured "Diamond Knurling" inner lining grips the footwear, keeping traction aids stable and in place
- Geometrically designed strap webbing and improved shape fit a greater variety of footwear these traction aids stay on!
- Features molded-in retention strap attachment points
- Industrial grade sole offers unparalleled grip, maximum durability, and superior operator safety
- Easy to put on and take off, as well as easy to adjust
- All-around solutions for most footwear, including boots



Be Smart. Be Safe. Be Sure.

| PRODUCT NO. | Old Code | Description | Strap Color | Spike Count | Size | Fits Men's Sizes | Fits Women's Sizes | Case Qty. |
|-------------|------------------|-------------|-------------|-------------|----------|------------------|--------------------|-----------|
| V3550270-S | allpurposeng-sml | All Purpose | Black | 12/Pair | Small | 4-7 | 5-8 | 12 |
| V3550270-M | allpurposeng-med | All Purpose | Black | 12/Pair | Medium | 7.5-10 | 8.5-11 | 12 |
| V3550270-L | allpurposeng-lrg | All Purpose | Black | 12/Pair | Large | 10.5-14 | 11.5-13 | 12 |
| V3550270-XL | allpurposeng-osd | All Purpose | Black | 12/Pair | Oversize | *see below | *see below | 12 |

*Oversized fits sized and Pac boots size 10+ or standard footwear sizes M 13.5-15, W 10+

duenorth[®]



ICE TRACTION AIDS — REPLACEABLE SPIKES



Light Industrial



- "Military" grade tungsten carbide "replaceable" spikes maximize traction and performance
- Twelve tungsten carbide spikes per pair excellent for general industrial applications
- Exclusive specially formulated 100% rubber provides maximizes flexibility and durability in extreme cold conditions
- Improved toe-box design enhances fit and function
- Unique support hole on heel strap provides easy adjustment, allowing easy to put-on and take-off characteristics
- Proprietary tread design for added slip resistance
- A low-cost solution for light-duty, intermittent use work environments

| PRODUCT NO. | Old Code | Description | Strap Color | Spike Count | Size | Fits Men's Sizes | Fits Women's Sizes | Case Qty. |
|---------------|-------------------|------------------|-------------|-------------|------------------|------------------|--------------------|-----------|
| V3550170-S/M | ltindustrial-s/m | Light Industrial | Black | 12/Pair | Small/ Medium | 3-7 | 5-9 | 12 |
| V3550170-L/XL | ltindustrial-l/xl | Light Industrial | Black | 12/Pair | Large/XL | 8-14 | 10+ | 12 |



ICE TRACTION AIDS — INDUSTRIAL HEEL





Ideal for drivers, delivery personnel, or anyone operating machinery where use of a conventional, full coverage traction aid may interfere with driving capabilities

The HTA offers a unique design feature that quickly allows the user to flip the traction pad underneath the heel (spike side in) when encountering a walking surface that may be damaged by exposed spikes



8 SPIKES PER PAIR!

- "Military" grade tungsten carbide "replaceable" spikes maximize traction and performance
- Eight tungsten carbide spikes per pair excellent for general industrial applications
- Exclusive specially formulated 100% rubber provides maximizes flexibility and durability in extreme cold conditions
- Patented design allows the user to easily and quickly flip the traction pad spike side in (facing
 the heel of the boot), or to simply slip the pad out from underneath the heel completely, resting
 on the back of the boot. Both functions eliminate spikes from damaging sensitive floor surfaces
- The flip-up position allows the operator to avoid damaging sensitive surfaces by removing the spikes from surface contact
- Ideal for drivers, delivery personnel, and machine operators where use of a full-coverage traction aid may interfere with driving capabilities
- One size fits most

| PRODUCT NO. | Old Code | Description | Strap Color | Spike Count | Size | Case Qty. |
|--------------|-----------------|-------------------|-------------|-------------|--------------------|-----------|
| V3550470-0/S | heeltractionaid | Heel Traction Aid | Black | 8/Pair | One size fits most | 12 |

Ideal for drivers, delivery personnel, and machinery operators!



WARNING: Do not operate a motor vehicle with the HTA traction aid in active traction mode. The traction aid should always be in the "up" inactive mode position when driving.

duenorth[®]

It's as Easy as 1, 2, 3!



Full inactive mode or...





...Easily flip traction pad – spike side into heel





Flipped HTA traction pad – spike exposure eliminated

3





V3551270



V3551370



V3550270



V4550150



V4550250



V4550350

Slip Protection

- 100% natural rubber stays strong and retains elasticity in subzero temperatures for maximized durability
- Easy to take on and off
- Easily adjustable
- Replaceable military grade tungsten carbide spikes
- Twelve pair of Ice Diamond spikes per pair
- Molded designs ensure comfortable ergonomically superior fit
- Designed for running, walking or working while keeping your safe and secure

| PRODUCT NO. | Old Code | Description | Strap Color | Size | Case Qty. |
|-------------|----------|--------------|-------------|-------------|-----------|
| V3551270 | | Everyday G3 | Black | S/M, L/XL | 12 |
| V3551370 | | Everyday Pro | Black | S/M, L/XL | 12 |
| V3550270 | | All Purpose | Black | S, M, L, XL | 12 |

Rubz Massage

- Massage relief for tired achy feet
- Massage sore, tight, and tired muscles
- Rubz Ball is great for working sore hands and feet
- Rubz Ball and Rubz Massage Roller help to relieve plantar fasciitis
- Full body massage tool relieves tight and sore muscles in back, arms, shoulders, thighs and calves

| PRODUCT NO. | Old Code | Description | Color | Case Qty. |
|--------------|----------|---|--------|-----------|
| V4550150-0/S | | Foot Rubz Ball (English/Spanish package) | Green | 24 |
| V4550850-O/S | | Foot Rubz Ball (English/French package) | Green | 24 |
| V4550250-0/S | | Foot Massage Roller (English/Spanish package) | Purple | 12 |
| V4550650-O/S | | Foot Massage Roller (English/French package) | Purple | 12 |
| V4550350-0/S | | Full Body Massage Tool (English/French package) | Orange | 12 |









Pioneer History

The Pioneer story began in 1887 in boomtown Vancouver. In the 1890s, the founders grew the business quickly by supplying gear to prospectors arriving from all over North America heading to the famous Alaska/Yukon Klondike Gold Rush. These "sourdough prospectors", as they were called, fought mountainous terrain and the harshest climates in their long journeys to the northern goldfields. They relied heavily on their Pioneer gear to help them get the job done. Pioneer has now been keeping workers safe and comfortable for over 130 years.

Over these years, Pioneer has grown a reputation for designing and building high-quality and innovative protective and safety apparel. Using only the best/safest materials, componentry, and by using advanced sewing methods, Pioneer continues to deliver on safety, fit, durability, comfort and value for the professional worker.



Klondikers carrying supplies ascending the Chilkoot Pass, circa 1898

Today, Pioneer offers a complete selection of safety clothing including Hi-Vis gear, flame resistant wear, rainwear and much more... plus custom embroidery solutions. SureWerx combines Pioneer with the rest of the SureWerx family of safety brands to offer protection to workers from head to toe.

Why Choose Pioneer?

- Century long reputation for delivering the highest quality and most durable safety apparel
- ☐ Independently tested to meet and exceed all stated safety standards
- ☐ Innovative new product solutions based on the voice of the customer
- Unique bar tacking operation on all key seams, pockets, and other areas of stress
- Custom embroidery and silk screen solutions available
- Exclusive StarTech® reflective tape

Icon legend



Arc Resistant



Quick Dry



Thermal



Flame Resistant



Tear Resistant



Waterproof



Packable



Tear-Away



Women's



Temperature Range







HI-VIS SAFETY APPAREL

SAFETY SECTION

PIONER

V1021840U V1021860U V1021850U

HI-VIS SAFETY VESTS

Women's Custom Fit Hi-Vis Safety Vest

- 136U/139U ANSI/ISEA 107-15 Class 2 Type P and R
- 139PKU ANSI/ISEA 107-15 Class 1 Type P Type O
- Tricot polyester
- Front zipper closure
- StarTech® reflective tape provides excellent visibility
- ID pocket with pen holders
- Storage, mobile phone, and inside pockets
- Nine total pockets
- Radiophone clip strand
- Tapered waist and flared bottom design made especially for women

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|--------|
| V1021850U | 136U | Hi-Vis Orange | XS-2XL |
| V1021860U | 1390 | Hi-Vis Yellow/Green | XS-2XL |
| V1021840U | 139PKU | Pink | XS-2XL |





Woven 150D Multi-Pocket Surveyor Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- 150 denier woven twill polyester
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Radiophone pocket on chest
- Two radiophone clip straps
- Four front pockets with brass surveyor tape dispenser grommet
- Five pen pockets
- Seven other all-purpose storage pockets
- 19 pockets in total
- Cooling underarm mesh vents
- Back ruler slot
- Large back pack pouch with zipper access
- D-ring access slot

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1010151U | 6692AU | Hi-Vis Orange | S-4XL |
| V1010141U | 6693AU | Hi-Vis Yellow/Green | S-4XL |



V1010141U V1010151U

Mesh Surveyor Vest with Padded Collar

- ANSI/ISEA 107-15 Class 2 Type P and R
- Cool 4 oz. (120 GSM) hi-vis polyester mesh
- Durable and highly breathable mesh with mesh pockets
- StarTech® reflective tape provides excellent visibility
- Full-length zipper with extra-strong webbing reinforcement
- Padded collar for all-day comfort
- Water bottle/paint can holder at left side of waist
- Large radiophone/cell phone front pocket
- Two radiophone clip straps
- ID pocket with transparent window
- Chest pocket with pen slots
- Two inside full-width pockets with double hook-and-loop closure
- Inside tablet/storage pocket on left side with support strap
- Flap-covered chest pocket
- Lower pockets with flaps and grommets
- 11 pockets in total
- D-ring access slot below left chest pocket
- Full-width back panel with double-layer zip storage pouch

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1011150U | 6730U | Hi-Vis Orange | S-4XL |
| V1011160U | 6731U | Hi-Vis Yellow/Green | S-4XL |



V1011160U V1011150U





V1010260U V1010250U

V1010460U V1010450U

300D Oxford with Mesh Back Surveyor Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- Durable and breathable
- 4 oz polyester mesh back panel for cool ventilation
- Heavy-duty zipper front closure
- StarTech® reflective tape provides excellent visibility
- Radiophone clip straps
- ID pocket with transparent window
- Left chest pocket with pen slots
- Lower pockets with flaps and grommets
- Right and left inside tablet/storage pocket
- 12 pockets total
- D-ring access slot
- Full mesh back panel with double-layer bottom pouch

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1010250U | 6672U | Hi-Vis Orange | S-4XL |
| V1010260U | 6673U | Hi-Vis Yellow/Green | S-4XL |

Full Mesh Surveyor Vest with Padded Collar

- ANSI/ISEA 107-15 Class 2 Type P and R
- Cool hi-vis mesh vest with solid material pockets
- 4 oz polyester mesh is durable and provides cool ventilation
- StarTech® reflective tape provides excellent visibility
- Heavy duty zipper closure
- Padded collar for all-day comfort
- Radiophone clip straps
- ID pocket with transparent window
- Left chest pocket with pen slots
- Right and left inside tablet/storage pocket
- 12 pockets total
- Full mesh back panel with double-layer bottom pouch
- D-ring access slot

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1010450U | 6674U | Hi-Vis Orange | S-4XL |
| V1010460U | 6675U | Hi-Vis Yellow/Green | S-4XL |







V1021571U, V1021580U V1020251U, V1020161U



V1021061U V1020951U



V1021260U V1021150U V1021170U

Safety Vest

- 131BBAU/134BBAU ANSI/ISEA 107-15 Class 2 Type P and R
- 135AU/134NAU ANSI/ISEA 107-15 Class 1 Type O
- Tricot polyester interlock
- Zipper front closure
- StarTech® reflective tape provides excellent visibility
- ID pocket with pen holders
- Three storage pockets
- Eight pockets total
- Mobile phone pocket
- Two radiophone clip strands
- Adjustable 1 size up at sides

| PRODUCT NO. | MOD. NO. | Color | Double Sizes |
|-------------|----------|---------------------------|--------------|
| V1020251U | 134BBAU | Hi-Vis Orange/Black | S/M-4/5XL |
| V1020161U | 131BBAU | Hi-Vis Yellow/Green/Black | S/M-4/5XL |
| V1021571U | 135AU | Black | S/M-4/5XL |
| V1021580U | 134NAU | Navy | S/M-4/5XL |

Safety Tear-Away Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- Tricot polyester interlock
- StarTech® reflective tape
- ID pocket
- Five-point tear-away
- Four sealed pockets
- Radiophone clip strap
- D-ring access slot
- Adjustable 1 size up at front

| PRODUCT NO. | MOD. NO. | Color | Double Sizes |
|-------------|----------|---------------------|--------------|
| V1020951U | 6930U | Hi-Vis Orange | S/M-4/5XL |
| V1021061U | 6931U | Hi-Vis Yellow/Green | S/M-4/5XL |

Zip-Up Snap Break Away Safety Vest

- 6935AU/6936AU ANSI/ISEA 107-15 Class 2 Type P and R
- 6937AU ANSI/ISEA 107-15 Class 1 Type O
- 6935AU/6936AU CSA Z96-15 Class 2 Level 2
- 6937AU CSA Z96-15 Class 1 Level 2
- Full mesh back panel
- Tear-away snaps on left side of zipper
- Reflective tape X-on back of vest
- StarTech® reflective tape provides excellent visibility
- Tricot polyester interlock front
- Zipper front closure
- Five-point tear-away/snap construction
- Four sealed pockets
- Two radiophone clip straps
- D-ring access slot

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|--------|
| V1021170U | 6937AU | Black | XS-5XL |
| V1021150U | 6935AU | Hi-Vis Orange | XS-5XL |
| V1021260U | 6936AU | Hi-Vis Yellow/Green | XS-5XL |







V1060360U V1060450U



V1030560U V1030550U



V1024860U V1024850U

Zip-Up Safety Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- Tricot polyester mesh provides cool comfort
- StarTech® reflective tape provides excellent visibility
- Cell phone pocket with flap
- Two lower pockets
- Full front zipper

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1060450U | 6921U | Hi-Vis Orange | S-4XL | |
| V1060360U | 6922U | Hi-Vis Yellow/Green | S-4XL | |

Tear Away Mesh Safety Vest

- ANSI 107-15 Class 2 Type P and R
- Polyester mesh design
- StarTech® reflective tape provides excellent visibility
- Five-point tear-away
- D-ring access slot
- Adjustable one size up at front

| PRODUCT NO. | MOD. NO. | Color | Double Sizes | |
|-------------|----------|---------------------|--------------|---|
| V1030550U | 597U | Hi-Vis Orange | S/M-4/5XL | Ī |
| V1030560U | 598U | Hi-Vis Yellow/Green | S/M-4/5XL | |

Mesh Multi-Pocket Safety Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- Polyester mesh
- Zipper front closure
- StarTech® reflective tape provides excellent visibility
- Radiophone clip straps on each shoulder
- Four large pockets for items such as keys, phones, cards, wallets, etc.
- ID pocket with transparent window on right chest pocket
- Left chest pocket with pen slots and D-ring below
- Lower pockets with flaps
- Nine pockets total

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|--------|
| V1024850U | 6960U | Hi-Vis Orange | XS-5XL |
| V1024860U | 6961U | Hi-Vis Yellow/Green | XS-5XL |









V1025260U V1025250U



V1025160U V1025150U



V1025060U V1025050U

Mesh Multi-Pocket Safety Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- 100% polyester mesh design for cool comfort
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Left and right chest mic tab
- Left chest radiophone pocket
- Right chest two-tier, four-division pencil pocket
- Clear ID holder with flap
- Lower inside left tablet/storage pocket with support strap
- Eight pockets total

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1025250U | 6853U | Hi-Vis Orange | S-5XL |
| V1025260U | 6854U | Hi-Vis Yellow/Green | S-5XL |

Multi-Pocket Safety Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- 100% polyester tricot
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Left and right check mic tab
- Left chest radiophone pocket
- Right chest two-tier, four-division pencil pocket
- Clear ID holder with flap
- Lower inside tablet/storage pocket with support strap
- Eight pockets total

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1025150U | 6855U | Hi-Vis Orange | S-5XL |
| V1025160U | 6856U | Hi-Vis Yellow/Green | S-5XL |

Mesh Safety Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- 100% polyester mesh design for cool comfort
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Self-color binding
- Value alternative to safety vests with pockets

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1025050U | 6844U | Hi-Vis Orange | S-5XL |
| V1025060U | 6845U | Hi-Vis Yellow/Green | S-5XL |







V1023560U V1023550U



V1023960U V1023950U



V1030150U-O/S

Polyester Tricot Sleeved Safety Vest

- ANSI 107-15 Class 3 Type P and R
- Polyester tricot design for ultimate breathability
- Durable nylon front zipper
- StarTech® reflective tape provides excellent visibility
- Contrast binding on entire garment and on pocket openings
- Two radiophone clip straps
- Two chest pockets, two pockets waist pockets

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1023550U | 6690U | Hi-Vis Orange | S-4XL |
| V1023560U | 6691U | Hi-Vis Yellow/Green | S-4XL |

Mesh Short Sleeve Safety Vest

- ANSI/ISEA 107-15 Class 3 Type P and R
- Breathable polyester mesh
- StarTech® reflective tape provides excellent visibility
- Zipper front closure
- Left chest cell pocket
- Radiophone clip straps on each shoulder

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1023950U | 6790U | Hi-Vis Orange | S-4XL | |
| V1023960U | 6791U | Hi-Vis Yellow/Green | S-4XL | |

All-Purpose Mesh Vest

- Polyester mesh
- Yellow PVC reflective tape
- Five-point tear-away
- ID and pen pockets
- Three storage pockets
- Radiophone clip strap
- D-ring access slot

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|---------------|----------|---------------|----------|
| V1030150U-O/S | 145U | Hi-Vis Orange | One size |

SAFETY SASHES & GAITERS

Reflective Belt Vest

- Makes any plain garment more visible and safer
- Premium 1.5" elastic
- Adjustable elastic waist band and chest straps
- Quick-release waist buckle
- StarTech® reflective tape provides excellent visibility

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|----------|
| V1041050U | 5496U | Hi-Vis Orange | One size |
| V1041060U | 5497U | Hi-Vis Yellow/Green | One size |

Reflective Belt Vest Tear Away

- Makes any plain garment more visible and safer
- Premium 2" elastic
- Adjustable elastic waist band and chest straps fit all
- Quick-release waist buckle
- Four-point break-away
- StarTech® reflective tape provides excellent visibility

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|----------|--|
| V1040850U | 5591U | Hi-Vis Orange | One size | |
| V1040860U | 5592U | Hi-Vis Yellow/Green | One size | |



V1041060U V1041050U



V1040860U V1040850U







V1051160U V1051150U



V1054060U V1054050U



HI-VIS SAFETY SHIRTS

Birdseye Safety T-Shirt

- ANSI/ISEA 107-15 Class 2 Type P and R
- Soft premium birdseye moisture-wicking polyester
- StarTech® reflective tape provides excellent visibility
- Rib crew neck
- Chest pocket with hook-and-loop closure
- Radiophone clip strap

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1051150U | 6990U | Hi-Vis Orange | S-5XL | |
| V1051160U | 6991U | Hi-Vis Yellow/Green | S-5XL | |

Birdseye Safety T-Shirt

- ANSI/ISEA 107-15 Class 2 Type P and R
- 100% moisture-wicking birdseye polyester
- StarTech® reflective tape provides excellent visibility
- Lightweight fabric provides all-day comfort
- Left chest pocket

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1054050U | 6882U | Hi-Vis Orange | S-4XL |
| V1054060U | 6883U | Hi-Vis Yellow/Green | S-4XL |

Cool Pass® T-Shirt

- ANSI/ISEA 107-15 Class 3 Type P and R
- StarTech® Silver Zebra reflective heat-pressed tape
- 100% moisture-wicking birdseye material
- UPF 50+ UV protection
- Lightweight and breathable Cool Pass® fabric
- Stripe around each arm
- Crew neck

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1052160U | 6901AU | Hi-Vis Yellow/Green | S-4XL |





HI-VIS SAFETY SHIRTS

Birdseye Long-Sleeved Safety Shirt

- ANSI/ISEA 107-15 Class 3 Type P and R
- 100% moisture-wicking birdseye polyester
- StarTech® reflective tape provides excellent visibility
- Lightweight material for all-day comfort
- Left chest pocket
- Two stripes on arms

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|-------|
| V1054250U | 6887U | Hi-Vis Orange | S-4XL |
| V1054260U | 6888U | Hi-Vis Yellow/Green | S-4XL |

Birdseye Long-Sleeved Safety Shirt

- ANSI/ISEA 107-15 Class 3 Type P and R
- 100% moisture-wicking birdseye polyester
- StarTech® reflective tape provides excellent visibility
- Lightweight material for all-day comfort
- Left chest pocket
- One stripe on arms

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1051250U | 6995U | Hi-Vis Orange | S-4XL | |
| V1051260U | 6996U | Hi-Vis Yellow/Green | S-4XL | |



V1054260U V1054250U



V1051260U V1051250U



V1060461U V1060351U



V1060560U V1060550U

HI-VIS SAFETY HOODIES

Polyester Fleece Hoodie

- ANSI/ISEA 107-15 Class 3 Type P and R
- Premium 10.5 oz (360 GSM) polyester fleece
- Double-stitched StarTech® reflective tape provides excellent visibility
- Detachable drawstring hood
- Elastic cuffs and hem
- Full front reversible zipper
- Two front slash pockets
- Two radiophone clip straps

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1060351U | 6924AU | Hi-Vis Orange | S-5XL | |
| V1060461U | 6925AU | Hi-Vis Yellow/Green | S-5XL | |

Micro Fleece Zip Hoodie

- ANSI/ISEA 107-15 Class 3 Type P and R
- 7 oz (240 GSM) micro fleece
- Four-way comfort stretch
- StarTech® reflective tape provides excellent visibility
- Full front zipper
- Detachable drawstring hood
- Elastic cuffs and hem
- Two front slash pockets
- Two radiophone clip straps

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1060550U | 6940U | Hi-Vis Orange | S-5XL | |
| V1060560U | 6941U | Hi-Vis Yellow/Green | S-5XL | |






HI-VIS TRAFFIC SAFETY WEAR

Traffic Safety Coverall

- ANSI/ISEA 107-15 Class 3 Type P and R
- StarTech® reflective tape provides excellent visibility
- Polyester knit
- Mesh ventilation panels on upper arms and legs
- Two-way brass zipper
- Two radiophone clip straps
- Two-way 28" leg zippers for ventilation and easy boot access
- Adjustable snap wrists
- Seven storage pockets: two rear, two chest, two side, one tool
- Hammer loop
- Two pass-through pockets
- Elastic waist

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|--------|--|
| V1070160U | 5999AU | Hi-Vis Yellow/Green | XS-5XL | |



Mesh ventilated upper legs

28'

28" leg

zippers



V1070160U



V1070360U

Traffic Safety Pant

- ANSI/ISEA 107-15 Class E Supplemental Type
- StarTech® reflective tape provides excellent visibility
- Polyester knit
- Mesh ventilation panels on upper legs
- Brass zipper fly access
- Two-way 28" leg zippers for ventilation and easy boot access
- Five storage pockets: two side, two back, one tool
- Elastic waist with drawstring

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|---------------------|--------|
| V1070360U | 5999PU | Hi-Vis Yellow/Green | XS-4XL |



- ANSI/ISEA 107-15 Class E, Supplemental Type
- Class 3 when paired with ANSI Class 2 or Class 3 vest, shirt or jacket
- 100% polyester lightweight mesh
- Two pass-through pockets
- Drawstring waist
- StarTech® reflective tape provides excellent visibility

| PRODUCT NO. | MOD. NO. | Color | Double Sizes |
|-------------|----------|---------------------|--------------|
| V1070760U | 5670U | Hi-Vis Yellow/Green | 2XS/XS-4/5XL |



V1070760U

Table of Contents





RAINWEAR

Three-Piece Repel Rainwear

- Welded seams for waterproof protection
- .35mm PVC/polyester material
- 100% waterproof and windproof
- Includes jacket, detachable hood, and bib pant

Jacket features:

- Vented back and underarms
- Two large front cargo pockets
- Zipper plus snap storm placket
- Corduroy collar

Bib pant features:

- Adjustable waist and suspenders
- Snap fly access

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|--------|-------|
| V3010460U | 577AU | Yellow | S-5XL |







HI-VIS SAFETY RAINWEAR

150D Oxford Poly/PVC Waterproof Suit

- ANSI/ISEA 107-15 Class 3 Type P and R
- Folds into a storage pouch
- 100% waterproof 150 denier hi-vis oxford polyester with PU backing
- StarTech® reflective tape provides excellent visibility
- Taped and heat-sealed seams
- Full back vent for breathability

Jacket features:

- Two lower flap pockets
- Drawstring with toggle on hem
- Half mesh-lined back
- Full front zipper
- Hood folds into collar

Bib Pant features:

- Elastic suspenders
- Metal buckles
- Snaps on leg hems

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1080350U | 5618U | Hi-Vis Orange | S-4XL | |
| V1080360U | 5619U | Hi-Vis Yellow/Green | S-4XL | |

Lightweight Waterproof Suit

- ANSI/ISEA 107-15 Class 1/Class E Type O/Supplemental Type
- Two pieces: hooded jacket and bib pant, fold into storage pouch
- StarTech® reflective tape provides excellent visibility
- 100% waterproof polyester/PVC
- Taped and heat-sealed seams

Jacket features:

- Back vents
- Adjustable hem
- Two large front cargo pockets
- Hood folds and zips into collar
- Full front zipper
- Drawstring with toggle on hem.

Bib Pant features:

- High-quality black elastic suspenders with non-corrosive plastic buckles
- Snap on hems to fit snug to boots.

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1080150U | 5598U | Hi-Vis Orange | S-4XL | |
| V1080160U | 5599U | Hi-Vis Yellow/Green | S-4XL | |





V1080360U V1080350U





V1080160U V1080150U









HI-VIS SAFETY RAINWEAR

Ripstop Waterproof Safety Jacket

- ANSI/ISEA 107-15 Class 3 Type P and R
- 100% waterproof and windproof
- StarTech® reflective tape provides excellent visibility
- Double-stitched and heat-sealed seams
- Abrasion, puncture, and tear resistant
- Front and back ventilation panels
- Fully mesh and taffeta lined back
- Fleece-lined collar with chin guard
- Two lower zip pockets, two lower inside pockets, and concealed zip cell phone pocket
- Two radiophone clip straps
- Full front two-way zipper with snap placket
- Elastic wrists with hook-and-loop closure
- 5400HU/5401HU (hood sold separately)

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1200251U | 5400AU | Hi-Vis Orange | S-4XL | |
| V1200261U | 5401AU | Hi-Vis Yellow/Green | S-4XL | |







V1200261U V1200251U

Hood for 300D Ripstop Waterproof Safety Jacket

- 300 denier durable ripstop polyester, PU coated
- Snap closure with drawstring
- Snaps for connecting to 300D ripstop jackets

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|----------|--|
| V1200350U | 5400HU | Hi-Vis Orange | One size | |
| V1200360U | 5401HU | Hi-Vis Yellow/Green | One size | |





300D Ripstop Waterproof Safety Bib Pant

- ANSI/ISEA 107-15 Class E, Supplemental Type
- 300 denier PU-coated ripstop polyester
- StarTech® reflective tape provides excellent visibility
- Double-stitched and heat-sealed seams
- Abrasion, puncture, and tear resistant
- 12" leg zippers with hook-and-loop plackets/adjustor straps
- Zippered closure inside bib pocket
- Zippered fly access
- Fully lined

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1200451U | 5404AU | Hi-Vis Orange | S-4XL | |
| V1200461U | 5405AU | Hi-Vis Yellow/Green | S-4XL | |





V1200461U V1200451U

PIONER

V1081360U V1081350U V1082360U V1082350U



V1120661U V1120651U

HI-VIS SAFETY RAINWEAR

Hi-Vis Safety Jacket and Hi-Vis Safety Bib Pants

Jacket:

- 100% waterproof 300 Denier Oxford polyester w/ PU coating
- ANSI 107-15 Class 3 Type P and R
- StarTech™ reflective tape
- Taped and heat sealed seams
- Superior tear- and abrasion-resistant fabric
- Liberal fit and full back vent for working comfort
- Folds into zippered storage pouch
- Two lower flap pockets
- Half mesh lined back
- Full front zipper
- Hood folds into collar

Bib Pants:

- 100% waterproof 300 Denier oxford polyester w/ PU coating
- ANSI 107-15 Class E Supplemental Type
- StarTech™ reflective tape
- Taped and heat sealed seams
- Superior tear- and abrasion-resistant fabric
- Liberal fit for working comfort
- Elastic suspenders
- High-quality plastic buckles
- Two snap adjustment on leg hems to fit snug to boots
- Two-sided waist adjustment for better fit around waist

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|----------------------|-------|
| V1081350U | 5626U | Hi-Vis Orange Jacket | S-4XL |
| V1081360U | 5628U | Hi-Vis Yellow Jacket | S-4XL |
| V1082350U | 5627U | Hi-Vis Orange Pants | S-4XL |
| V1082360U | 5629U | Hi-Vis Yellow Pants | S-4XL |

HI-VIS INSULATED RAINWEAR

Hi-Vis 100% Waterproof Quilted Bib Pant

- ANSI/ISEA 107-15 Class E, Supplemental Type
- Double-stitched StarTech® reflective tape provides excellent visibility
- 300 denier PU-coated oxford polyester with 5.3 oz (180 GSM) warm quilted polyester lining
- 100% waterproof and windproof
- 20" boot access two-way leg zippers with snap storm covers
- Double-stitched, taped and heat-sealed seams
- Two-way zipper with brass snap storm placket
- Premium adjustable elastic suspenders with quick-release clips
- Elastic waist
- Two front slash cargo pockets
- Sealed inside chest pocket with pen slot
- Outside chest pocket with flap

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1120651U | 5040BBU | Hi-Vis Orange | S-4XL | |
| V1120661U | 5041BBU | Hi-Vis Yellow/Green | S-4XL | |





HI-VIS INSULATED RAINWEAR

Hi-Vis Waterproof 2-in-1 Bomber Jacket

- Outer jacket ANSI/ISEA 107-15 Class 3 Type P and R
- PU-coated oxford polyester shell
- 100% windproof and waterproof
- StarTech® reflective tape provides excellent visibility
- Removable inner fleece liner
- Embroidery access zipper on the inside
- Detachable snap hood with pouch to conceal hood
- Comfort collar with fleece lining
- Elastic ribbed cuffs and waist
- Full front zipper
- Two radiophone clip straps
- Two large front zippered pockets
- One cell phone pocket
- Inside chest pocket
- Black bottom to conceal soiling

| PRODUCT NO. | PRODUCT NO. MOD. NO. | | Sizes | |
|-------------|----------------------|---------------------|-------|--|
| V1130460U | 5209U | Hi-Vis Yellow/Green | S-4XL | |











V1210170U V1210160U

HEATED OUTERWEAR

Heated Safety Nano Bomber Jacket







- Comes with USB port to connect to rechargeable power bank (power bank not included; must be purchased separately)
- 300 denier Oxford polyester, PU coated shell fabric
- 120GSM insulated with taffeta lining
- 100% waterproof and windproof
- Double-stitched and heat sealed seams
- StarTech® reflective tape
- Full front waterproof zipper
- Two lower slash pockets with waterproof zip, 1 lower inside zip pockets, laser chest zip
- Two radiophone clip straps
- Three-piece lined detachable hood
- Fleece lined collar
- Elastic rib wrists
- Machine washable
- Sizes: S-4XL

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------------|-------|--|
| V1210160U | 5408AU | Hi-Vis Yellow/Green | S-4XL | |
| V1210170U | 5409AU | Hi-Vis Black | S-4XL | |

| Dawar Bank | HOURS OF KEEPING WARM* | | | | |
|------------------------|-------------------------|----------------------|--|----------------------|---------------------|
| Power Bank Capacity | Settings | | | | |
| (mAh) | Comfort 38°C/100.4°F | Cozy 43°C/109.4°F | | Warm 48°C/118.4°F | Hot 53°C/127.4°F |
| 5,000 | 6 | 5 | | 4 | 3 |
| 10,000 | 9 | 8 | | 7 | 6 |
| 15,000 | 12 | 11 | | 10 | 9 |
| 20,000 | 15 | 14 | | 13 | 12 |
| 25,000 | 18 | 17 | | 16 | 15 |

^{*}Based on 25,000 mAh Power Bank. Power bank not included.

The above chart is a guideline. Your results can vary based on the age and quality of the power bank used, outside temperatures and your own body heat. Test your power pack to ensure the length of performance with this jacket.

MARNING: Cancer − www.P65Warnings.ca.gov







CARBON NANOTUBE TECHNOLOGY (CNT)



MULTI-HEATING ZONES



CONNECTS TO USB POWER BANK



18 HOURS*



WATERPROOF & WINDPROOF



MACHINE WASHABLE

HI-VIS OUTERWEAR

Hi-Vis Safety Insulated Bomber Jacket

- PU-coated oxford polyester shell
- Meets ANSI 107-15 Class 3 Type P and R
- 160 GSM quilted poly insulation
- 100% windproof and waterproof
- StarTech® reflective tape provides excellent visibility
- Embroidery access zipper on the inside
- Detachable snap hood with pouch to conceal hood
- Comfort collar with fleece lining
- Elastic ribbed cuffs and waist
- Full front zipper
- Two radiophone clip straps
- Two large front zippered pockets
- One cell phone pocket
- Inside chest pocket
- Black bottom to conceal soiling

| PRODUCT NO. | MOD. NO. | Color | Sizes | |
|-------------|----------|---------------|-------|--|
| V1130560U | 5208AU | Hi-Vis Yellow | S-4XL | |







V1130560U



Certified bv UL

V2540310, V254031T V2540350, V254035T

Certified bv UL

V2570450U V2570470U

FLAME RESISTANT APPAREL



Flame Resistant Tech Premium Soft Coveralls





- ANSI/ISEA 107-15 Class 1 Type O
- FR-Tech™ 88% premium cotton blended with 12% high-tenacity nylon, 7 oz (240 GSM)
- Material and all components meet CGSB 155.20-2017 and NFPA 2112-2018 certified to UL
- Thermal Protective Performance (TPP) Value 9
- 7702/7702T CSA Z96-15 Class 3 Level 2 and Class 3 Level FR
- 7704/7704T CSA Z96-15 Class 1 Level 2 and Class 1 Level FR
- Meets ASTM F1506-2018, NFPA 70E-18 and CSA Z462-18
- ATPV 10 cal/cm² (Arc Thermal Protective Value)
- ARC 2 Arc Rating Category
- Double-stitched StarTech® FR reflective tape provides excellent visibility
- · Sewn with aramid inherently FR thread
- Flame resistance guaranteed for the life of the garment
- Radiophone clip strap
- Two-way FR brass zipper
- Seven storage pockets: two back, two chest, two side, one tool
- Two pass-through pockets
- Adjustable wrists and ankles
- Superior flash fire and arc flash protection

| PRODUCT NO. | MOD. NO. | Color | Waist Sizes |
|-------------|----------|--------|-------------|
| V2540350 | 7702 | Orange | 36-60 |
| V254035T | 7702T | Orange | 40-60 Tall |
| V2540310 | 7704 | Blue | 36-60 |
| V254031T | 7704T | Blue | 40-60 Tall |



Flame Resistant Zip-Style Heavyweight Cotton Safety Hoodie







- ANSI/ISEA 107-15 Class 1 Type O
- CSA Z96-15 Class 1 Level 2 and Class 1 Level FR
- 100% FR treated preshrunk cotton, 12 oz (400 GSM)
- Material and all components meet CGSB 155.20-2017 and NFPA 2112-2018 certified to UL
- Thermal Protective Performance (TPP) value: 12.6 cal/cm²
- Meets ASTM F1506-10a, NFPA 70E and CSA Z462-15
- ATPV 23 cal/cm² (Arc Thermal Protective Value)
- ARC 2 Arc Rating Category
- Double-stitched StarTech® FR reflective tape X on the back provides excellent visibility
- Sewn with inherently FR thread
- Two front slash pockets
- FR brass non-locking zipper
- Tough double-stitched seams
- Liberal sizing
- Detachable snap hood

| PRODUCT NO. | MOD. NO. | Color | Sizes |
|-------------|----------|--------|-------|
| V2570450U | 338SFU | Orange | S-5XL |
| V2570470U | 337SFU | Black | S-5XL |

FLAME RESISTANT APPAREL



Flame Resistant Hi-Vis Vest

- ANSI/ISEA 107-15 Class 2 Type P and R
- FR treated polyester mesh
- Meets EN ISO 14116 Index 1
- Must be worn over an FR sleeved garment
- Five-point tear-away
- StarTech® FR reflective tape provides excellent visibility
- D-ring access slot
- Adjustable one size up at front

| PRODUCT NO. | MOD. NO. | Color | Double Sizes |
|-------------|----------|---------------------|--------------|
| V2510850U | 6914AU | Hi-Vis Orange | S/M-4/5XL |
| V2510860U | 6916AU | Hi-Vis Yellow/Green | S/M-4/5XL |







V2510850U





CLASS 1 – TYPE O

ANSI/ISEA 107-15 AMERICAN NATIONAL STANDARD FOR HIGH-VISIBILITY SAFETY APPAREL AND ACCESSORIES

What is **ANSI/ISEA 107-15** American National Standard for High Visibility Safety Apparel and Accessories?

The latest ANSI/ISEA 107-15 version consolidates the requirements of ANSI/ISEA 107-2010 and ANSI/ISEA 207, American National Standard for High-Visibility Public Safety Vests, in an effort to establish a single comprehensive document that considers all occupational tasks. The standard continues to present three performance classes of garments based on the amount of visible materials and design attributes incorporated into the final configuration, and identifies garment types based on expected use settings and work activities being performed. These are designated as off-road (type O), roadway and temporary traffic control (type R), or public safety activities (type P). For a detailed explanation of these standards, visit www.safetyequipment.org/ansiisea-107-2015.

Listed below is a simplified explanation of the ANSI/ISEA 107-15 classes of garments:

CLASS 1 - TYPE O (Off Road)

Class 1 safety apparel are for workers whose jobs puts them at the lowest risk level. These would be for environments where traffic is traveling at or below 25 mph and work is taking place at a safe distance from a roadway. An example of this type of work would be sidewalk repair in a small residential neighborhood.

According to ANSI, in order for a vest to qualify as a Class 1 Type O safety apparel, it must have 217 square inches of background material in safety yellow or safety orange and have a minimum of 155 square inches of reflective tape. These reflective stripes must go around the middle of the vest as well as over the shoulder. These ANSI safety vests are designed to cover the torso only and do not require sleeves.

As defined by ANSI, "Performance Class 1 provides the minimum amount of high-visibility materials required to differentiate the wearer visually from non-complex work environments, in scenarios in which the struck-by hazards will not be approaching at roadway speeds, and therefore operative detection and identification distances."

- Basic harness or safety tape over the shoulders and encircling the waist.
- Suitable in less complex work areas where workers are separated from car and truck traffic.
- Example: Class 1 = Class 1 tape configuration + non-retroreflective background material.
- Pioneer model #135AU (V1021571U) Hi-Vis Safety Vest and Pioneer model #337SFU (V2570470U) Flame Resistant Zip Style Heavyweight Cotton Safety Hoodie are both Class 1 — Type O HVSA.

ANSI/ISEA 107-15 AMERICAN NATIONAL STANDARD FOR HIGH-VISIBILITY SAFETY APPAREL AND ACCESSORIES

CLASS 2 – TYPE R and/or P (Roadway, Temporary Traffic Control, and/or Public Safety

Class 2 safety apparel is intended for working environments that pose a greater risk than Class 1. This can include workers who are on a roadway where traffic is moving under 50 mph. This apparel is larger than their Class 1 counterparts because they require more high visibility and reflective areas to be present. A Class 2 vest, for example, must have at least 775 square inches of safety yellow or safety orange background material and 201 square inches of reflective striping. Class 2 apparel are commonly worn by survey crews, airport baggage handlers, and school crossing guards.

- Full coverage of the upper torso including front, back, sides and over the shoulders.
- The background material must be high visibility.
- For use in more complex or low-light work areas requiring greater visibility.
- **Example:** Class 2 = Class 2 tape configuration + retroreflective background material.
- Pioneer model #6990U (V1051150U) Birdseye Safety T-Shirt is a Class 2 Type R and P garments.

CLASS 3 – TYPE R and/or P (Roadway, Temporary Traffic Control, and/or Public Safety

Class 3 safety apparel is reserved for people working in the most dangerous environments where visibility is the highest priority. This includes roadways where traffic is traveling in excess of 50 mph, but it can also apply to emergency personnel or tow truck operators working in extreme weather conditions where visibility is at a minimum.

Class 3 ANSI approved safety apparel requires the most background fabric and reflective striping. The standard includes 1,240 square inches of safety yellow or safety orange background with 310 square inches of reflective striping.

As defined by ANSI, "Performance Class 3 can offer greater visibility to the wearer in both complex backgrounds and through a full range of body movements by mandatory placement of background, retroreflective and combined-performance materials on sleeves and pant legs (if present). Regardless of the area of materials used, a sleeveless garment or vest alone shall not be considered Performance Class 3."

- A Class 2 garment combined with arm and leg bands.
- The background material must be high visibility to the standard.
- Hi-Vis coveralls meet this standard; safety jackets (Class 2) and pants (Class E) can be worn combined, or arm/leg bands can be added to Class 2 garments, to attain Class 3.
- Suitable for use in complex work areas where low light, fast-moving traffic and inclement weather are safety factors.
- Example: Class 3 = Class 3 tape configuration + retroreflective background material
- Pioneer model #6690U (V1023550U) Hi-Vis Safety Vest With Sleeves, Pioneer model #5999AU (V1070160U) Hi-Vis Traffic Safety Coverall are all Class 3 — Type R and P garments.





CLASS 2 - TYPE R AND/OR P



CLASS 3 - TYPE R AND/OR P





SUPPLEMENTAL CLASS E

ANSI/ISEA 107-15 AMERICAN NATIONAL STANDARD FOR HIGH-VISIBILITY SAFETY APPAREL AND ACCESSORIES

SUPPLEMENTAL CLASS E

ANSI Supplemental Class E applies to Hi-Vis pants, bib overalls, shorts, and gaiters. Alone, these garments are not ANSI compliant. When combined with a Class 2 or Class 3 garment, the combination satisfies Class 3 requirements. This classification remains the same under the ANSI/ISEA 107-2015 standard.

ANSI designates "pants, bib overalls, shorts, and gaiters" as Class E.

- Class E garments must always be worn in combination with other items to meet HVSA PPE requirements.
- Class E items worn in combination with Performance Class 2 or Class 3 items will achieve an overall classification of Performance Class 3.
- Pioneer model #5404AU (V1200451U) Hi-Vis 300D Ripstop Waterproof Safety Bib Pant and Pioneer model #5999PU (V1070360U) Hi-Vis Traffic Safety Pant are both Class E HVSA.

Safety officials in your region determine the appropriate class wear for specific job sites. Hazardous risk assessment should be performed by a qualified individual to determine the applicable high visibility classification.





SIZING CHART

Body Measurements (not garment measurements)

| Jackets, Cove | ralls, | Over | alls | | | | | | | | | | | | | | | | | | |
|---------------|--------|------|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| | XS | : | s | ı | И | | Ĺ. | Х | L | 2) | (L | 3) | (L | 4) | KL | 5 | (L | 6) | ΚL | 7) | KL |
| Size | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | 54 | 56 | 58 | 60 | 62 | 64 | 66 | 68 | 70 | 72 |
| Chest | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | 54 | 56 | 58 | 60 | 62 | 64 | 66 | 68 | 70 | 72 |
| Waist | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | 54 | 56 | 58 | 60 | 62 | 64 | 66 |
| Arms | 32 | 3 | 3 | 3 | 4 | 3 | 5 | 3 | 6 | 3 | 7 | 3 | 8 | 3 | 9 | 4 | 0 | 4 | 1 | 4 | |
| Hip | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | 54 | 56 | 58 | 60 | 62 | 64 | 66 | 68 | 70 | 72 |

| Pants (overalls | Pants (overalls are sized based on chest measurements) | | | | | | | | | | | | | | | | | | | | |
|---|--|----|----|----|----|----|----|----|-----|----|----|----|-----|----|----|----|-----|----|----|------|----|
| XS S M L XL 2XL 3XL 4XL 5XL 6XL 7XL | | | | | | | | | | | | | | | | | | | | | |
| Size | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | 54 | 56 | 58 | 60 | 62 | 64 | 66 |
| Waist | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | 54 | 56 | 58 | 60 | 62 | 64 | 66 |
| Hip | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | 54 | 56 | 58 | 60 | 62 | 64 | 66 | 68 | 70 | 72 |
| Inseam | 30.5 | 3 | 1 | 31 | .5 | 3 | 2 | 32 | 2.5 | 3 | 3 | 33 | 3.5 | 3 | 4 | 34 | 1.5 | 35 | | 35.5 | |

| Shirts (select size by | Shirts (select size by neck for closed collar shirts, by chest for open collar shirts) | | | | | | | | | | | | |
|----------------------------------|--|---------|---------|--------|---------|---------|---------|---------|---------|---------|--|--|--|
| S M L XL 2XL 3XL 4XL 5XL 6XL 7XL | | | | | | | | | | | | | |
| Neck | 14–14.5 | 15–15.5 | 16–16.5 | 17–7.5 | 18–18.5 | 19–19.5 | 20-20.5 | 21–21.5 | 22–22.5 | 23–23.5 | | | |
| Chest | 34 | 38 | 42 | 46 | 50 | 54 | 58 | 62 | 66 | 70 | | | |
| Sleeve | 33.5 | 34 | 34.5 | 35 | 35.5 | 36 | 36.5 | 37 | 37.5 | 38 | | | |

| Women's Ga | rment Sizing | | | | | |
|------------|--------------|----|----|----|----|-----|
| | xs | S | М | L | XL | 2XL |
| Chest | 32 | 34 | 36 | 39 | 42 | 45 |
| Waist | 24 | 26 | 28 | 31 | 34 | 37 |
| Arms | 29 | 30 | 31 | 32 | 33 | 34 |
| Hip | 35 | 37 | 39 | 42 | 45 | 48 |
| Inseam | 27 | 28 | 29 | 30 | 31 | 32 |

All measurements in inches.

Talls in Coveralls are 2 inches longer in the torso and 1 inch longer in the sleeves and legs.

Measurement Directions:

Neck: Measure around the base of your neck, round up to the next half-inch.

Chest: Measure around your chest, under the arms and across the shoulder blades,

over a shirt if stomach is larger than chest; choose the larger size.

Waist: Measure around your waist at the level you normally wear your pants, over a shirt.

Hip: Standing with feet together, measure around the widest part of your hips,

parallel to the floor.


Inseam: Measure a good-fitting pair of pants along the inseam, from crotch seam to bottom edge of

cuff.

Sleeve: Bend arm and place fist on hip. Measure from center back of your neck, across shoulder and

down arm to elbow and then to your wrist. This is your sleeve length.

For working garments, measure liberally to find your size, as you need freedom of movement.

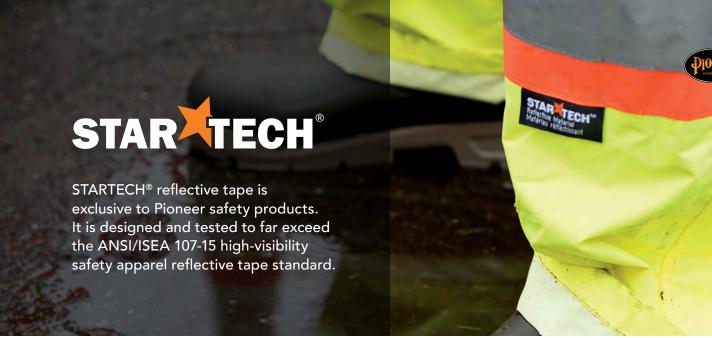



StarTech® reflective tape has been independently tested to meet:

- ANSI 107-15 American National Standards Institute
- EN ISO 20471 High-Visibility Standard Level 2 high-visibility safety apparel and accessories

StarTech® FR tape is made of FR cotton or aramid material as backing and has been independent lab-tested to meet:

- CGSB 155.20-2017 (Heat-Resistant Test)
- NFPA 2112-2018 Standard on Flame-Resistant Garments for Protection of Industrial Personnel against short duration thermal exposure from fire

The many standards for reflective tapes all require passing a battery of tests that simulate working conditions.

These include measuring the retroreflective performance of StarTech® tape after being subjected to abrasion, multiple flexing, cold temperatures, variable temperatures, multiple washings, wet conditions, and, for the FR version, its heat resistance properties as well. Due to its premium design and quality, StarTech® tape not only meets but exceeds all of these standards!



NFPA (National Fire Protection Association) 2112-2018 — Standard on Flame-Resistant Garments for Protection of Industrial Personnel Against Flash Fire

- NFPA 2112-2018 requires 3rd party certification through UL.
- Tests performed under NFPA 2112:
 - Heat transfer performance predict burn injury (2nd or 3rd degree burn).
 - 2. Flame resistance ASTM D6413 as received and after 100 wash cycles. Tested for 3 secs.
 - 3. Thermal shrinkage resistance/Heat resistance test Oven test at 260°C.
 - 4. Manikin testing ASTM F1930 Manikin has sensors and is subjected to 84kW/m² for flame for 3 secs. to verify if 2nd or 3rd degree burns are recorded.
 - 5. Thread melting resistance 260°C of heat is applied to verify if thread melts.
 - 6. Other tests included: label legibility, fabric weight, tensile strength, tear strength, material burst strength, laundering shrinkage, colorfastness, seam efficiency.

Electric Arc Standards

Test Method:

 ASTM F1506-2018 — Standard Performance Specification for Flame Resistant and Arc Rated Textile Materials for Wearing Apparel for Use by Electrical Workers Exposed to Momentary Electric Arc and Related Thermal Hazards.

Standards:

■ NFPA 70E-2018 — Standard for Electrical Safety in the Workplace.

What is ARC Flash?

When an electric current passes through air between underground conductors or between underground conductors and grounded conductors, temperatures can reach 20,000°C (35,000°F).

Exposure to these extreme temperatures burns the skin directly and ignites clothing, which adds to the burn injury.

The majority of hospital admissions due to electric accidents are from arc flash burns, not from shocks.

ASTM F1506-2018

- Both NFPA 70E and CSA Z462 define the following categories for ARC rated clothing
- ATPV (Arc thermal protective value) point at which 2nd degree burn is registered on the sensor and fabric is still intact
- □ EbT (Break-open threshold) point at which 2nd degree burn is registered on the sensor and fabric has broken/formed a hole
- Minimum ARC rating required
 4 Cal/cm²
- ARC 1 4 Cal/cm² to 7.9 Cal/cm²
- ARC 2 8 Cal/cm² to 24.9 Cal/cm²
- ARC 3 25 Cal/cm² to 39.9 Cal/cm²
- ARC 4 40 Cal/cm² and up.

Tests in this standards go way beyond testing for ARC rating:

- Breaking load test Grab test
- Tear resistance
- Seam slippage
- Colorfastness Laundering/Dry
 Cleaning three cycles of washing
- Dimensional Change Max 3%
- Flammability Char length needs to be below 150mm
- Before and after 25 washes,
 Bursting strength, Arc Rating

WARRANTY

Garment and Safety Gear

Pioneer warrants all garments to be free of defects in materials and workmanship under the normal use for which the product is intended. Normally, a garment defect of manufacture will show up in the first two months of use.

This warranty is limited to product failure as a result of seam separation, broken snaps or zippers, material delaminating, or any defect in material or workmanship that affects the performance of the garment.

Excluded from this warranty are products that have been affected by cuts or punctures, disfigured from continued wear or use, and products that have been exposed to solvents or excessive heat which may degrade their performance and garments that have not been maintained as per wash care instructions on the garment.

Warranty claims will only be provided for those products that have been made available for inspection by Pioneer. Any warranty claim on garments that have been purchased over 60 days ago will have to be accompanied by pictures and/ or defective garment itself for inspection. To maintain our health and safety standards, all products returned for inspection must be free of all removable debris. Any products returned that do not meet the above conditions will be returned to the customer at their expense.

Pioneer shall not be liable for indirect, special, incidental, or consequential damage or penalties and does not assume liability of purchaser or others for injury to persons or property.

For a warranty claim on a Pioneer garment, please contact your local sales or customer service representative.







FAILL PROTECTION

TABLE OF CONTENTS

| HARNESSES AND BELTS | 241–259 |
|-----------------------------------|---------|
| SELF-RETRACTING LIFELINES | 260–270 |
| LANYARDS | 271–274 |
| VERTICAL LIFELINES AND ROPE GRABS | 275–277 |
| ANCHORAGE CONNECTORS | 278–282 |
| TANK TROLLEYS | 283 |
| KITS | 284–296 |
| HARDWARE AND ACCESSORIES | 297 |
| LADDER SAFETY SYSTEM | 298–305 |
| EMERGENCY DESCENT SYSTEMS | 306–307 |
| ENGINEERED SYSTEMS | |
| TOOL TETHERING SYSTEMS | 309–314 |
| STANDARDS AND REGULATIONS | 315 |



PEACE OF MIND

PeakWorks Knows Fall Protection

From its inception in 2008, PeakWorks has been passionate about providing workers peace of mind when working at heights. The PeakWorks founders, with over 50 years of fall protection experience between them, set out to build a company that not only offered an industry-leading product line, but also provided their customers with value-added services supplying real solutions for both workers and the companies employing them. Today, as an integral part of our family of brands, we embrace those same principles. We know that the best fall protection is to eliminate the fall hazard in the first place. However, we also know that life doesn't always work that way. Our single goal, then, remains very simple: to ensure the best possible outcome when the unexpected occurs.

PeakWorks Embraces Industry Standards

Our in-house fall protection experts are driven to provide the best possible products and systems to ensure maximum worker safety. Like you, we live and work in North America, and we are intimately knowledgeable about the strict regulations imposed in this country, which has the highest standards in the world. In fact, we are so dedicated to the advancement of worker safety that our fall protection experts are active members of both the CSA and ANSI standards committees. Not only do we adhere to these standards, we help to develop them!

PeakWorks Thrives on Problem Solving

PeakWorks is all about solving problems for workers at height. Our team of experts is available to consult on applications, hazard analysis training, recertification of products and much more. If you need help, we are just a phone call away!

PeakWorks Offers Uncompromising Value

Great news! Not only have we developed a world-class fall protection program, we have also made every effort to ensure that it is delivered at the best value to you, the customer. We have accomplished this without compromising product quality – your safety remains our primary objective. So give us a call and let us know how PeakWorks can not only exceed your safety expectations but potentially lower your overall fall protection costs at the same time.

ANSI Certification

Products that are certified to the ANSI standard is much different than products that meets or exceed ANSI standard. Certified to ANSI means that the product has been tested and certified by a third party testing facility that have meet all the requirements of ISO 17025. The products undergo all the testing that is set forth by the ANSI standard to qualify as certified product. This gives the user an extra level of assurance that the product will perform as designed. On the other hand, if a product has the term "Meets or exceeds" on the labeling or instruction manual, it simply means that the manufacturer has tested the products internally usually without a third-party verification. It's important that you as the user of the equipment understand these difference so that you can make an informed decision on the products you are using or specifying to use in the field.

236 surewerx.com/usa



FALL PROTECTION DEFINED

What is Fall Protection?

Fall Protection refers to a series of regulated products or systems designed to protect workers from the risk of falls when working at height.

Types of Fall Protection

There are three basic types of fall protection available on the market:

Fall Restraint – Comprised of products or equipment which prevent a free fall from happening in the first place. The fall restraint system is designed to prevent a worker from ever reaching the edge or drop-off point when working at heights. Common examples: Guard Rails or Restraint Lanyards connected to Full Body Harnesses that are shorter in length than the distance from the Anchor Point to the Drop-Off Point.

Fall Arrest – Comprised of products, equipment or systems which stop a free fall once it occurs. These products are carefully designed and tested to stop a falling worker with minimal risk of injury. Common examples: Full Body Harnesses connected to Shock Absorbing Lanyards, or Self-Retracting Lifelines that are connected to an approved Anchor Point.

Work Positioning – Comprised of products or equipment which support or suspend a worker in order to allow the worker to be positioned at their working point hands-free. Common examples: Rebar Chain Assembly, Boatswain's Chairs, Descent Controllers.

Know Your ABCs

Fall protection systems are designed to prevent contacting a lower level if you fall from a height. There are several key components to these systems and it is important to know the basics.

A = Anchorage Connectors – The Anchorage is an engineered product which connects to some form of structure. The combination of these two critical components must be capable of withstanding the forces incurred during a fall. In North America, these components must be capable of withstanding a minimum 5,000 lb (22 kN) of force. Common examples: Anchor Slings, Fixed D-Rings, Beam Anchors, Concrete Hole Anchors, Carabiners.

B = Body Support – The Body Support is the component that is worn on or around the torso. There are two types of Body Support:

Restraint Belt:

Belt that is installed at the waist and used for worker positioning and travel restraint. A Restraint Belt must NEVER be used for fall arrest.

Full Body Harness:

A Full Body Harness is a body support device that is installed on the entire body and is designed to distribute the forces of a fall to the shoulders, thighs and pelvis.

All Full Body Harnesses have a back D-ring designed for the fall arrest connection point. Other styles of Full Body Harnesses are available with other attachment points such as side D-rings for work positioning, a frontal D-ring for ladder climbing, and shoulder D-rings for confined space work. Some styles of harnesses can also have a combination of all or some of these attachment points, for example our Class APLE has the following connection points: (1) back D-ring, (2) side D-rings, (1) frontal D-ring and (2) shoulder D-rings.

Full Body Harnesses are the only accepted body support to be used for a fall arrest application. NEVER use a Restraint Belt in a fall arrest application.

C = Connectors – Connectors are the engineered components that connect the Body Harness or Body Belt to the appropriate Anchorage. Common examples: Shock Absorbing Lanyards, Self-Retracting Lifelines (SRLs), Restraint Lanyards, Lifelines.

237







HARNESSES



PEAKWORKS

FULL-BODY HARNESSES

About Full-Body Harnesses

- Full-body harnesses are designed to arrest a fall while simultaneously distributing the tremendous shock or load to the worker's body.
- There are many applications and conditions in which full-body harnesses must be worn. In order to maximize effectiveness and minimize injury, it is critical that an appropriate body harness be selected based on the job for which it is intended. PeakWorks offers a full range of body harnesses for almost every application.
- Full-body harnesses must be fitted and tightened properly to ensure maximum protection and to minimize injury.
- Waist or restraint belts are not replacements for full-body harnesses.
- All PeakWorks full-body harnesses are built to meet or exceed the highest standards while providing maximum fit and comfort.

Harness Classes

- Full-body harnesses come in many styles with a variety of attachment points (D-rings). The placement of these D-rings is critical to the type of application and positioning of the worker when performing a job.
- The fall protection industry and regulatory committees have standardized the positioning of these attachment rings into Harness Classes A, D, E, L, P.
- Depending on the application, full-body harnesses may require more than one attachment class in order to correctly position the body and stress points during a fall; i.e., AE and AP.
- All full-body harnesses come with a standard Class A D-ring (located at the back between the shoulder blades).



Class A Fall Arrest



Class D
Descent



Class E Limited Access



Class L Ladder



Class P Work Positioning

Harness Hardware

PeakWorks full-body harnesses are available with a variety of buckle types for your convenience:



Pass-Thru Chest Strap



Pass-Thru Leg Strap



Grommeted Leg Strap



Stab Lock Chest or Leg Strap



Friction Torso Adjustment



Large Back D-Ring



Padded Back Support



Frontal D-Ring



Lanyard Park

UNIVERSAL HARNESS SIZE CHART

| HGT/WGT | 130 | 140 | 150 | 160 | 170 | 180 | 190 | 200 | 210 | 220 | 230 | 240 | 250 | 270 | 290 | 310 |
|---------|-----|-----|-----|-----|-----|-----|-----|---------|-----|-----|-----|-----|-----|------|-----|-----|
| 6'8" | | | | | | | | | | | | | | | | |
| 6'6" | | | | | | | | | | | | | V | T /\ | VV | |
| 6'4" | | | | | | | | | | | | | Λ | L/A | XX | |
| 6'2" | | | | | | | | | | | | | | | | |
| 6'0" | | | | | | | _ | | | | | | | | | |
| 5'10" | | | | | | | C | /M | / | | | | | | | |
| 5'8" | | | | | | | | / I V L | / 🗕 | | | | | | | |
| 5'6" | | | | | | • | | | • . | | | | | | | |
| 5'4" | | | | | Jn | ive | rsa | 31 F | ·IT | Rai | na | 2 | | | | |
| 5'2" | | | | , | | | | 7 | - | | -5 | | | | | |
| 5'0" | V | C | | | | | | | | | | | | | | |
| 4'10" | Λ | | | | | | | | | | | | | | | |

240 surewerx.com/usa



HARNESS D-RING LOCATIONS





Reference Guide











• Certified to both ANSI Z359.11 and

- CSA Z259.10 standards
- Meets or exceeds all applicable OSHA standards
- 130 to 310 lb. (60 to 141kg) capacity (combined weight of person, tools, clothing, etc.)
- Sub-pelvic strap for added safety and support
- Fall indicator for easier inspection before use
- Polyester webbing

PeakWorks offers four series of harnesses: PeakPro Plus, PeakPro, Contractor, and Compliance.



Example: V8005170 (FBH-70110G)





PEAKPRO

• Hi-vis green top and black bottom, easily visible and distinguishable for ease of donning

Example: V8255623

(FBH-60110A1020-L)

- Five points of adjustment ensuring a good fit (two leg, two torso,
- Buckles: premium Stab Lock (chest), Stab Lock (legs) or grommets (legs)
- Padded shoulder, back and leg straps for all-day comfort
- Includes installed trauma straps
- Available as harness & belt combo or just the harness.

- *** PEAKPRO PLUS **SUPREME**
- Peek-a-boo webbing has wear indicator for simple inspection
- Hi-vis yellow top and black bottom, easily visible and distinguishable for ease of donning
- Five points of adjustment ensuring a good fit (two leg, two torso, one chest)
- Buckles: premium Stab Lock (chest), Stab Lock (legs)
- Premium padded shoulder, back and leg straps for all-day comfort
- Anodized aluminum hardware for reduced weight and no corrosion
- Includes installed trauma straps at no additional cost
- Includes integrated padded belt



Reference Guide (continued)









Example: V8002000 (FBH-10000A)



Example: V8001000 (FBH-10002A)

CONTRACTOR



- Hi-vis green top and black bottom, easily visible and distinguishable for ease of donning
- Five points of adjustment ensure a good fit (two leg, two torso, one chest)
- Buckles: Pass-thru (chest and legs), pass-thru or grommets (legs)

COMPLIANCE



- Hi-vis green
- Three points of adjustment ensuring a good fit (two leg, one chest)
- Buckles: Pass-thru (chest and legs)



PeakPro Plus Series





PEAKPRO PLUS HARNESS — SUPER PREMIUM SUPREME COMFORT • FIT • SAFETY • PERFORMANCE

244 surewerx.com/usa



PeakPro Plus Series

The PeakWorks PeakPro Plus Harness is a sure-fit full body harness, Class APE, with increased durability and comfort. All hardware components are made from high-grade anodized aluminum for reduced weight and no risk of corrosion for added life expectancy.



- Material: Polyester "peek-a-boo" webbing when you see red, it's time to replace the harness
- Premium padding on the shoulders, back and legs
- Super-lightweight, anodized aluminum hardware
- Reinforced padded lumbar support belt for all-day comfort
- Supreme comfort, fit, and safety
- Chest Buckles: Aluminum Stab Lock
- Leg Buckles: Aluminum Stab Lock
- Weight: 3 lbs. (1.4kg)
- Class A, Class AP, Class APE available
- Certified to CSA Z259.10 and ANSI Z359.11







PEAKWORKS

V800517X Back

| | | | | | | | BUCKLE TYPE | | | | D-RING | LOCATIO | N |
|-------------|----------------|------|----------------------------------|------------------|-----------|---------------------|-------------|-----------|----------|------|--------|---------|-----------|
| PRODUCT NO. | MODEL NO. | Size | Weight Capacity | Trauma Straps | Class | Harness Weight | Chest | Legs | Torso | Back | Sides | Front | Shoulders |
| V8005101 | FBH-70110A-S | S | 130 to 310 lbs. (60 to 141kg) | Yes | Class A | 2.3 lbs (1kg) | Stab Lock | Stab Lock | Friction | 1 | | | |
| V8005102 | FBH-70110A-M | М | 130 to 310 lbs. (60 to 141kg) | Yes | Class A | 2.3 lbs (1kg) | Stab Lock | Stab Lock | Friction | 1 | | | |
| V8005103 | FBH-70110A-L | L | 130 to 310 lbs. (60 to 141kg) | Yes | Class A | 2.3 lbs (1kg) | Stab Lock | Stab Lock | Friction | 1 | | | |
| V8005104 | FBH-70110A-XL | XL | 130 to 310 lbs. (60 to 141kg) | Yes | Class A | 2.5 lbs (1.1kg) | Stab Lock | Stab Lock | Friction | 1 | | | |
| V8005105 | FBH-70110A-XXL | XXL | 130 to 310 lbs. (60 to 141kg) | Yes | Class A | 2.6 lbs (1.1kg) | Stab Lock | Stab Lock | Friction | 1 | | | |
| V8005111 | FBH-70110B-S | S | 130 to 310 lbs. (60 to 141kg) | Yes | Class AP | 2.5 lbs (1.1kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8005112 | FBH-70110B-M | M | 130 to 310 lbs. (60 to 141kg) | Yes | Class AP | 2.5 lbs (1.1kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8005113 | FBH-70110B-L | L | 130 to 310 lbs. (60 to 141kg) | Yes | Class AP | 2.8 lbs. (1.3kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8005114 | FBH-70110B-XL | XL | 130 to 310 lbs. (60 to 141kg) | Yes | Class AP | 2.9 lbs. (1.3kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8005115 | FBH-70110B-XXL | XXL | 130 to 310 lbs. (60 to 141kg) | Yes | Class AP | 2.9 lbs. (1.3kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8005171 | FBH-70110G-S | S | 130 to 310 lbs. (60 to 141kg) | Yes | Class APE | 3 lbs. (1.4kg) | Stab Lock | Stab Lock | | 1 | 2 | | 2 |
| V8005172 | FBH-70110G-M | M | 130 to 310 lbs. (60 to 141kg) | Yes | Class APE | 3 lbs. (1.4kg) | Stab Lock | Stab Lock | | 1 | 2 | | 2 |
| V8005173 | FBH-70110G-L | L | 130 to 310 lbs. (60 to 141kg) | Yes | Class APE | 3 lbs. (1.4kg) | Stab Lock | Stab Lock | | 1 | 2 | | 2 |
| V8005174 | FBH-70110G-XL | XL | 130 to 310 lbs. (60 to 141kg) | Yes | Class APE | 3 lbs. (1.4kg) | Stab Lock | Stab Lock | | 1 | 2 | | 2 |
| V8005175 | FBH-70110G-XXL | XXL | 130 to 310 lbs. (60 to 141kg) | Yes | Class APE | 3 lbs. (1.4kg) | Stab Lock | Stab Lock | | 1 | 2 | | 2 |



PeakPro Series





PEAKPRO HARNESS — PREMIUM COMFORT • FIT • SAFETY • PERFORMANCE

246 surewerx.com/usa

FULL-BODY HARNESSES/BELT COMBOS

PeakPro Series





The PeakWorks PeakPro Series harness is our gold standard harness. With its legendary comfort, this harness can be worn comfortably all day long when working at heights.

- High visibility color
- Fully adjustable for a universal fit
- Fall indicator for easier inspection before use
- Large back D-ring for easy connection
- Available in a variety of classes: A, AP, AL
- Meets or exceeds all applicable OSHA standards
- Polyester webbing

Belt sizing chart:

Min.

32" (81.3cm)

36" (91.4cm)

42" (1.07m)

44" (1.11m)

48" (1.22m)

Size

S

M L

ΧL

XXL

- 130 to 310 lb. (60 to 141kg) capacity (combined weight of person, tools, clothing, etc.)
- Certified to both ANSI Z359.11 and CSA Z259.10 standards

Max.

40" (1.02m) 44" (1.11m)

48" (1.22m)

52" (1.32m)

56" (1.42m)





V825562X FBH60110A1020-X

| | | | | | | Е | BUCKLE TYP | 1 | | D-RING I | LOCATION | |
|-------------|----------------|------|------------------|----------|---------------------|-----------|------------|----------|------|----------|----------|-----------|
| PRODUCT NO. | MODEL NO. | Size | Trauma Straps | Class | Harness Weight | Chest | Legs | Torso | Back | Sides | Front | Shoulders |
| V8255621 | FBH60110A10201 | S | Yes | Class AP | 3.5 lbs (1.6 kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8255622 | FBH60110A10202 | М | Yes | Class AP | 3.5 lbs (1.6 kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8255623 | FBH60110A10203 | L | Yes | Class AP | 3.5 lbs (1.6 kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8255624 | FBH60110A10204 | XL | Yes | Class AP | 3.5 lbs (1.6 kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8255625 | FBH60110A10205 | XXL | Yes | Class AP | 3.5 lbs (1.6 kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |



*** BEST

PeakPro Series











The PeakWorks PeakPro Series harness is our gold standard harness. With its legendary comfort, this harness can be worn comfortably all day long when working at heights.

- High visibility color
- Fully adjustable for a universal fit
- Fall indicator for easier inspection before use
- Large back D-ring for easy connection
- Available in a variety of classes: A, AP, AL
- Meets or exceeds all applicable OSHA standards
- Polyester webbing
- 130 to 310 lb. (60 to 141kg) capacity (combined weight of person, tools, clothing, etc.)
- Certified to both ANSI Z359.11 and CSA Z259.10 standards







V8006110 FBH-60110B

| | | | | | | BUCKLE TYPE | | | D-RING L | OCATION | |
|-------------|--------------|------------------|-----------|-----------------|-----------|-------------|----------|------|----------|---------|-----------|
| PRODUCT NO. | MODEL NO. | Trauma Straps | Class | Harness Weight | Chest | Legs | Torso | Back | Sides | Front | Shoulders |
| V8006100 | FBH-60110A | Yes | Class A | 3.5 lbs.(1.6kg) | Stab Lock | Stab Lock | Friction | 1 | | | |
| V8006110 | FBH-60110B | Yes | Class AP | 4 lbs.(1.8kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | | |
| V8006160 | FBH-60110APL | Yes | Class ALP | 4.7 lbs (2kg) | Stab Lock | Stab Lock | Friction | 1 | 2 | 1 | |

PeakPro Series











UNIVERSAL FIT — ONE SIZE **FITS MOST USERS!**



PeakPro harnesses now include two lanyard parks for easy storage



V8006120 FBH-60110L



PeakPro Series Harnesses





V8006200 FBH-60120A



V8006210 FBH-60120B

| | | | | | | | | BUCKLE TYPE | | | D-RING | LOCATIO | N |
|-------------|------------|-----------|----------------------------------|------------------|----------|---------------------|-----------|-------------|----------|------|--------|---------|-----------|
| PRODUCT NO. | MODEL NO. | Size | Weight Capacity | Trauma Straps | Class | Harness Weight | Chest | Legs | Torso | Back | Sides | Front | Shoulders |
| V8006120 | FBH-60110L | Universal | 130 to 310 lbs. (60 to 141kg) | Yes | Class AL | 4 lbs. (1.8kg) | Stab Lock | Stab Lock | Friction | 1 | | 1 | |
| V8006200 | FBH-60120A | Universal | 130 to 310 lbs. (60 to 141kg) | Yes | Class A | 3.5 lbs. (1.6kg) | Stab Lock | Grommet | Friction | 1 | | | |
| V8006210 | FBH-60120B | Universal | 130 to 310 lbs. (60 to 141kg) | Yes | Class AP | 4.5 lbs. (2kg) | Stab Lock | Grommet | Friction | 1 | 2 | | |



Contractor Series





CONTRACTOR HARNESS — PERFORMANCE SERIES

FULL-BODY HARNESSES/BELT COMBOS

** BETTER

Contractor Series

- Contractor series harnesses are as lightweight as it gets for all-day comfort
- High-visibility color
- Five-point adjustable for a universal fit
- Available with or with out belt. Belt can be added and removed.
- Two lanyard parks on chest strap for easy storage of lanyard
- Fall indicator for easier inspection before use
- 130 to 310 lbs. capacity (60 to 141kg)
- Certified to both ANSI Z359.11 and CSA Z259.10



PEAKWORKS





All Contractor harnesses now include two lanyard

V825522X FBH10000A1020X

| | | | | | | | BUCKLE TYPE | | | D-RING I | OCATION | |
|-------------|----------------|------------------|------------------|----------|---------------------|-----------|-------------|----------|------|----------|---------|-----------|
| PRODUCT NO. | MODEL NO. | Size | Trauma Straps | Class | Harness Weight | Chest | Legs | Torso | Back | Sides | Front | Shoulders |
| V825521X | FBH10020A1020X | S, M, L, XL, XXL | No | Class AP | 3 lbs (1.4kg) | Pass-Thru | Grommet | Friction | 1 | 2 | | |
| V825522X | FBH10000A1020X | S, M, L, XL, XXL | No | Class AP | 2.5 lbs (1.1 kg) | Pass-Thru | Pass-Thru | Friction | 1 | 2 | | |



** BETTER

Contractor Series













Contractor harnesses now include two lanyard parks for easy storage

- Contractor series harnesses are as lightweight as it gets for all-day comfort
- High-visibility color
- Five-point adjustable for a universal fit
- Available with or without a belt. Belt can be added and removed.
- Two lanyard parks on chest strap for easy storage of lanyard
- Fall indicator for easier inspection before use
- 130 to 310 lbs. capacity (60 to 141kg)
- Certified to both ANSI Z359.11 and CSA Z259.10







V8002210 FBH-10020B

| | | | | | | | BUCKLE TYPE | | | D-RING L | OCATION | |
|-------------|------------|-----------|------------------|----------|---------------------|-----------|-------------|----------|------|----------|---------|-----------|
| PRODUCT NO. | MODEL NO. | Size | Trauma Straps | Class | Harness Weight | Chest | Legs | Torso | Back | Sides | Front | Shoulders |
| V8002000 | FBH-10000A | Universal | No | Class A | 2.5 lbs. (1.1kg) | Pass-Thru | Pass-Thru | Friction | 1 | | | |
| V8002010 | FBH-10000B | Universal | No | Class AP | 3 lbs. (1.4kg) | Pass-Thru | Pass-Thru | Friction | 1 | 2 | | |
| V8002200 | FBH-10020A | Universal | No | Class A | 3 lbs. (1.4kg) | Pass-Thru | Grommet | Friction | 1 | | | |
| V8002210 | FBH-10020B | Universal | No | Class AP | 3.5 lbs. (1.6kg) | Pass-Thru | Grommet | Friction | 1 | 2 | | |
| V8002230 | FBH-10020E | Universal | No | Class AE | 3.5 lbs. (1.6kg) | Pass-Thru | Grommet | Friction | 1 | | | 2 |

Contractor Series













V8002020 FBH-10000L



V8002030 FBH-10020E

| | | | | | | | BUCKLE TYPE | | | D-RING LO | CATION | |
|-------------|--------------|-----------|------------------|----------|---------------------|-----------|-------------|----------|------|-----------|--------|-----------|
| PRODUCT NO. | MODEL NO. | Size | Trauma Straps | Class | Harness Weight | Chest | Legs | Torso | Back | Sides | Front | Shoulders |
| V8008000 | FBH-10000AHV | Universal | No | Class A | 2.5 lbs. (1.4kg) | Pass-Thru | Pass-Thru | Friction | 1 | | | |
| V8002020 | FBH-10000L | Universal | No | Class AL | 3.5 lbs. (1.6kg) | Stab-Lock | Pass-Thru | Friction | 1 | | 1 | |
| V8002030 | FBH-10000E | Universal | No | Class AE | 3 lbs. (1.4kg) | Pass-Thru | Pass-Thru | Friction | 1 | | | 2 |



GOOD

Compliance Series











Contractor harnesses now include two lanyard parks for easy storage

The PeakWorks Compliance Series harness is the best value on the market. When compliance and price are the key drivers, this harness is the solution.

- High visibility color
- Three points of adjustment ensuring a good fit (two leg, one chest)
- Two lanyard parks on chest strap for easy storage of lanyard
- Pass-thru leg and chest buckles for quick donning
- Sub-pelvic strap for added safety and support
- Fall indicator for easier inspection before use
- Large back D-ring for easy connection
- Polyester webbing
- 130 to 310 lb. (60 to 141kg) capacity (combined weight of person, tools, clothing, etc.)
- Certified to both ANSI Z359.11 and CSA Z259.10 standards
- Meets or exceeds all applicable **OSHA** standards







V8001200 FBH-10022A

| | | | | | | | BUCKLE TYPE | | | D-RING L | OCATION | |
|-------------|------------|-----------|------------------|---------|-------------------|-----------|-------------|-------|------|----------|---------|-----------|
| PRODUCT NO. | MODEL NO. | Size | Trauma Straps | Class | Harness Weight | Chest | Legs | Torso | Back | Sides | Front | Shoulders |
| V8001000 | FBH-10002A | Universal | No | Class A | 2 lbs (0.9kg) | Pass-Thru | Pass-Thru | N/A | 1 | | | |
| V8001200 | FBH-10022A | Universal | No | Class A | 2.2 lbs (1kg) | Pass-Thru | Grommet | N/A | 1 | | | |

FULL-BODY HARNESSES — SPECIALTY ARC FLASH

Welding and Arc Flash Harness

- Kevlar® webbing resists high temperatures and is designed to withstand harsh welding environments
- Five points of adjustment (two leg, two torso, one chest) for custom fit
- Upgraded Stab Lock leg and chest buckles for quick donning and comfort
- Large fall arrest D-ring for easy lanyard connection
- Side D-rings for added versatility
- Fall indicator for convenient pre-use inspection
- Certified to ANSI Z359.11, CSA Z259.10, ASTM F887-13, and meets the revised OSHA 1910.269 standard for arc flash exposure up to 40 cal/cm²







PEAKWORKS



V8009010 FBH 121102B

| | | | | | | | BUCKLE TYPE | | | D-RING L | OCATION | |
|-------------|-------------|-----------|----------------------------------|-------------|-------------------|-----------|-------------|-------|------|----------|---------|-----------|
| PRODUCT NO. | MODEL NO. | Size | Weight Capacity | Class | Harness Weight | Chest | Legs | Torso | Back | Sides | Front | Shoulders |
| V8009010 | FBH-121102B | Universal | 130 to 310 lbs. (60 to 141kg) | Class AP | 4 lbs. (1.8kg) | Stab Lock | Stab Lock | | 1 | 2 | | |

Welder's Shock Absorbing Lanyards

- Partially Oriented Yarn (POY) material stretches and is encased in tubular webbing for maximum strength
- Kevlar® webbing protects against welding spatter and resists high temperatures
- Drop indicator for easier inspection before use
- Designed for a 6' fall with a capacity of 130 to 310 lbs.
- Certified to ANSI Z359.13, ASTM F887-13, and OSHA 1910.269/1926954 standards

| PRODUCT NO. | MODEL NO. | Material | Length | Deployed Length | Average Arrest Force | Body | Anchor | Weight |
|----------------|-----------|-----------------------|------------|--------------------|----------------------------|------|--------|---------------------|
| V8109506 | SA-1700-6 | Kevlar w/ POY core | 6' (1.82m) | 10' (3m) | 900 lbs. (408kg) | Snap | Snap | 2.5 lbs. (1.1kg) |
| V8109526 | SA-1702-6 | Kevlar w/ POY core | 6' (1.82m) | 10' (3m) | 900 lbs. (408kg) | Snap | Form | 2.5 lbs. (1.1kg) |



SA-1702-6



SA-1700-6





V805101X WB-1010-X



V805601X WB-6010-X



V805602X WB-6020-X



V8059 WB-6006



V860301 FBH-PAD



V860302 CP-14010

BELTS AND ACCESSORIES

The PeakWorks series of belts add versatility and productivity to any PeakWorks harness.

- Lightweight for worker comfort
- Fits all PeakWorks harnesses
- Padded lumbar support made from closed cell foam
- Plated grommets for improved corrosion resistance
- Polyester webbing



Tongue Buckle

Belt sizing chart:

| Size | Min. | Max. |
|------|--------------|-------------|
| S | 32" (81.3cm) | 40" (1.02m) |
| M | 36" (91.4cm) | 44" (1.11m) |
| L | 42" (1.07m) | 48" (1.22m) |
| XL | 44" (1.11m) | 52" (1.32m) |
| XXL | 48" (1.22m) | 56" (1.42m) |
| | | |



D-Ring

| PRODUCT NO. | MODELNO | C: (V) | Due due at Name a | Padded | D-Ring Location | | |
|----------------------|-----------|------------------|--|--------|-----------------|-------|--|
| (see table below) | MODEL NO. | Size (X) | Product Name | Lumbar | Back | Sides | |
| V805101X | WB-1010-X | S, M, L, XL, XXL | Restraint Belt | | 1 | | |
| V805601X | WB-6010-X | S, M, L, XL, XXL | PeakPro Restraint Belt with Padded Lumbar Support | Υ | 1 | | |
| V805602X | WB-6020-X | S, M, L, XL, XXL | PeakPro Positioning Belt with Padded Lumbar Support | Υ | | 2 | |
| V8059 | WB-6006 | Universal | Padded Lumbar Support for Belt | | | | |

When ordering a belt, **PRODUCT NO. X** refers to the product size; for example:

| Size | PRODUCT NO. | MODEL NO. |
|------|------------------|---------------------|
| S | V805101 1 | WB-1010- S |
| M | V805101 2 | WB-1010- M |
| L | V805101 3 | WB-1010- L |
| XL | V805101 4 | WB-1010- XL |
| XXL | V805101 5 | WB-1010- XXL |

Accessories can be added to any PeakWorks harness.

| PRODUCT NO. | MODEL NO. | Product Name |
|-------------|-----------|-------------------------------------|
| V860301 | FBH-PAD | Removable Back Pad for PW Harnesses |
| V860302 | CP-14010 | D-Ring Extender 18" (46cm) |
| V860308 | CP-14010 | D-Ring Extender 8" (20cm) |

Accessorize Your Harness!

TRAUMA STRAPS



- In the event of a fall, trauma straps help reduce the effects of suspension trauma
- Trauma straps can be added to any PeakWorks® full body harness
- Trauma straps are an important part of any rescue plan

How to Use Trauma Straps

- Pull the straps out of their packs
- Clip the straps together
- Step into the straps

Orthostatic Intolerance or Suspension Trauma

- Blood can accumulate in the veins while in a sedentary position
- Reduction in quantity and/or quality (O_2) of blood flowing to the brain and kidneys
- May be fatal

Suspension Trauma Signs and Symptoms

- Faintness
- Breathlessness
- Sweating
- Paleness
- Hot flashes
- Increased heart rate
- Nausea
- Dizziness
- Unusually low heart rate
- Unusually low blood pressure
- Graying loss of vision

HELPS TO
PROVIDE PROPER
CIRCULATION
WHILE AWAITING
RESCUE



| PRODUCT NO. | MODEL NO. | Product Name |
|-------------|------------|--------------|
| V860303 | CP-23300-1 | Trauma Strap |



How to Use Trauma Straps





SELF-RETRACTING LIFELINES (SRLs)

Choosing the Right Self-Retracting Lifeline



There are different styles of SRLs that can be used for different applications. It is important to consider the specific application when choosing an SRL. Knowing the type of work environment, where the attachment point of the SRL is located on the job site, what the worker will be doing at heights and the required location of the fall protection will be crucial information to choosing the correct SRL. Below are questions to consider when choosing the appropriate SRL edge and where a fall hazard exists that could cause the lifeline to come into contact with the edge; for example, when working over structural steel or in high-rise concrete buildings under construction with open flooring.

Will the Installation of the SRL be Overhead (Vertical) or at Horizontal/Foot-Level (LE)?



Horizontal/Foot-Level (LE)

- If there is no anchorage point overhead to connect an SRL, you
 will likely be connecting at foot level or horizontally, also known
 as leading edge (LE) application
- A leading edge can be described as any sharp edge commonly found on a work site with which a cable or webbing connection could come into direct contact during a fall
- An SRL-LE device is an SRL that has enhanced design features for use in leading edge applications and must always be used for any leading edge application

Allowable Edges on Your SRL-LE Device?

- ANSI Z359 standard only requires leading edge testing over a steel sharp edge with radius of .005 inches to classify an SRL as leading edge approved. (Identified by the global sharp edge symbol below)
- ANSI Z359.14 standard does not cover testing over additional materials commonly found on many job sites, such as concrete edges, wood edges, paneled rounded fascia
- It is important to be aware of additional edge materials that the lifeline might come in to contact with and verify if the SRL-LE can be used in that application with the manufacturer




Radius as sharp as .005 in. (.13mm)



Vertical (non-LE)

If the installation will be overhead or at shoulder level, you should determine the minimum fall clearance requirement on the job site to help identify the correct class of SRL you should be using. ANSI Z359 classifies an SRL as a CLASS A or CLASS B with the differences in arresting distances and average arrest forces indicated in the image below.

The extra 2-1/2 feet difference in arresting distance between ANSI Class A and B is a critical factor if you only have 6 feet fall clearance from the lower level (danger level).

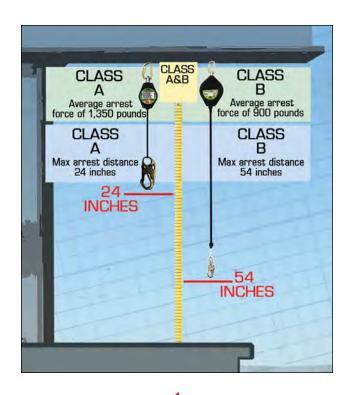



SELF-RETRACTING LIFELINES (SRLs)

Peakworks SRL-LE Clear Advantage

One Device for Both Applications

- PeakWorks offers one device that is certified as ANSI Z359.14 CLASS A in vertical non-LE applications as well as leading edge certified for use in horizontal applications. One product works for most applications
- Reduces inventory duplication and safety investment costs

Deceleration System

- Unlike most SRL-LE devices in the market, PeakWorks SRL-LE devices do not require an external shock pack in order to meet the leading-edge standards due to the exclusive internal braking system
- This translates to shorter arresting distances in both vertical and horizontal orientation (refer to page 263 for fall clearance comparison)

Allowable Edges

- PeakWorks SRL-LE devices have had additional testing over multiple leading-edge materials commonly found on job sites, such as concrete edges, wooden beams, paneled rounded fascias, and trapezoidal sheet metal
- Contact a PeakWorks representative for information on additional material testing

Dyneema® Webbing vs Cable

- PeakWorks SRD-LE units are up to 32% lighter than competitors' SRD-LE of equivalent length
- Thin webbing accommodates smaller housing design
- Outstanding versatility for use on multiple surface materials
- Dyneema® webbing is a proven LE-rated material

THE PEAKWORKS LE ADVANTAGE

- No shock pack required
- Reduces fall clearance by up to 4 feet!
- Certified for both vertical and horizontal applications
- Ultra lightweight!



PeakWorks Leading Edge-rated devices can be identified with labels on the housing and lifeline

V845526006LE

PeakWorks understands the importance of calculating the fall clearance, which is why we created an app for calculating fall clearances. Visit the App Store today to download it.







THE PEAKWORKS SRL-LE FALL CLEAR ADVANTAGE!

SRL FALL CLEARANCE COMPARISON Anchor point at foot level Non-LE Non-LE 0' 0' 2' Free Fall PeakWorks' Required 51 51 1' **Distance** 4.5 Fall Clearance for Non-LE 1' **Deceleration** Competitors' Required Minimum **Distance** 2' 31 to **Fall Clearance** 4' for Non-LE 4.5' Harness 3.51 to Stretch 1' 8.5 **PEAKWORKS** Safety 31 **Factor Swing** Fall* 1' PeakWorks' 31 **Required Minimum** . Fall Clearance for LE * 17.51 **Competitors**' *Eliminate Swing Fall whenever possible! If Swing Fall exists, always account for additional fall clearance. Required Minimum Fall Clearance for LE



SELF-RETRACTING DEVICE (SRD) — LEADING EDGE

Dual Tie-Back LE



COMPACT UNIT

Among the smallest SRLs in the market. Designed for comfort and to reduce fatigue

Impact-resistant aluminum housing provides maximum durability compared to nylon or thermoplastic housing SRLs in the market

Internal automatic locking pawls will stop a fall within inches while keeping average arresting forces to 900 lbs. or less. Unlike competitor SRLs, no external shock pack is required on any of the PeakWorks SRLs as shock absorbers capability are built in to the internal braking mechanism

Tie-back snap hook with a 5,000 lb. gate strength and 0.83" (21mm) gate opening

Harness bracket allows for easy installation under the D-ring and provides a snug backpack-style fit. No separate carabiner required for harness connectivity on dual SRLs

Provides 360° rotation and leaves the harness dorsal D-ring open for rescue or other equipment attachment

Swivel top keeps the lifeline from tangling and twisting

6 ft. retractable lifeline reduces dragging and trip falls

Hi-visibility green Dyneema* webbing allows workers to easily inspect webbing for damage

> 3 ft. of abrasion-resistant outer jacket tie-back legs wrap around the anchor point, allowing the tie-back snap hook to tie back on to itself

Offers more mobility for workers allowing the tieback leg to connect where traditional anchorage connectors are not available or feasible

Impact indicator provides visual inspection

Using the correct snap hook on your SRL tie-back makes all the difference

PeakWorks designed the new Tie-Back with a special snap hook that will not accidentally open under gate load. Be sure to use approved Tie-Back gear that is certified to meet ANSI standards 5,000 lb. gate strength.





V845528009TB


Tie-back hook (3/4" (19mm) Gate opening)



Mini Form hook (2" (51mm) Gate opening)



Snap Hook (3/4" (19mm) Gate opening)



Form Hook (2-1/2" (64mm) Gate opening)

SELF-RETRACTING DEVICE (SRD) — LEADING EDGE

Tie-Back SRD-LE — Class A

Tie-Back

- Tie-back is an all-in-one, self-retracting lifeline and anchorage connector, thus reducing the amount of equipment required on the job site and making it a cost-effective alternative
- It allows the unit to attach directly to a compatible structural anchor by wrapping around the structure to tie-back to itself
- Single and dual 100% tie-off configurations available
- Approved for use in vertical and horizontal applications
- LE minimum fall clearance: 13 ft. (4m)
- Maximum total arrest distance: 24 in. (0.61m) non-leading edge application
- Average arrest force: 765 lbf (3.4kN)
- LE minimum setback distance: 12 in. (0.31 m)
- Third-party certified to ANSI Z359.14-2014, Class A and Leading Edge, meets applicable OSHA standards

| PRODUCT NO. | MODEL NO. | Webbing Width | Length | Weight | Capacity | Dual/Single |
|---------------|---------------|------------------|-----------------|-------------------------|---------------------|-------------|
| V845528009TB | SRL-54954-9TB | 0.77" (20mm) | 9 ft. (2.7m) | 6 lbs. (2.7kg) | 300 lbs. (136kg) | Dual |
| V845552T009TB | SRL-54T54-9TB | 0.77" (20mm) | 9 ft. (2.7m) | 2.5 lbs. (1.1kg) | 300 lbs. (136kg) | Single |

INCREDIBLY
LIGHTWEIGHT —
CHECK AND
COMPARE!







Third Party

Certification

ANSI

V845528009TB (Dual Tie-Back)



Table of Contents

(Single Tie-Back)





V8455277-5LE



V845526006LE

SELF-RETRACTING DEVICE (SRD) — LEADING EDGE

Dual Compact SRD-LE — Class A

- Dual units are also available with lightweight aluminum rebar hooks
- Attachment points include a swivel eye on housing with connection pin for mounting below the dorsal D-ring
- Hi-vis green Dyneema® webbing lifeline has been sharp-edge tested over a .005" radius sharp edge
- Class A rating means the fall distance is less than 2 ft. (0.6m) or less when connected overhead (non-LE application)
- Leading edge minimum fall clearance of 13 ft. (4m) required
- Third-party certified to ANSI Z359.14-2014, Class A and Leading Edge, CSA Z259.2.2, meets applicable OSHA standards

| Third Party | |
|-------------|---|
| ANS | |
| | = |

| PRODUCT NO. | MODEL NO. | Lifeline Type | Length | Weight | Capacity | Single/ Dual | Hook Style |
|--------------|-----------------|---------------------------------------|-------------------|---------------------------|---------------------|-----------------|--|
| V8455277-5LE | SRL-54854-7-5LE | Dyneema® Webbing .77" (20mm) | 7.5 ft. (2.3m) | 6.2 lbs. (2.82kg) | 300 lbs. (136kg) | Dual | Compact ladder hook (gate opening 2 in. (51mm)) |
| V845525006LE | SRL-50502-6LE | Dyneema® webbing .77" (20mm) | 6 ft. (1.8m) | 5.5 lbs. (2.5kg) | 300 lbs. (136kg) | Dual | Regular snap hook (gate opening .75 in. (19mm)) |
| V845526006LE | SRL-50602-6LE | Dyneema® webbing .77" (20mm) | 6 ft. (1.8m) | 7.4 lbs. (3.36 kg) | 300 lbs. (136kg) | Dual | Aluminum form hook (gate opening 2.5 in. (64mm)) |



SELF-RETRACTING DEVICE (SRD) — LEADING EDGE

Single SRD LE — Class A

Class A — Dyneema® Web

- Approved for use in vertical and horizontal applications
- LE minimum fall clearance: 13 ft. (4m)
- Maximum total arrest distance: 24 in. (0.61m) non-leading edge application
- Average arrest force: 765 lbf (3.4kN)
- Minimum setback distance: 12 in. (0.31 m)
- Foot level tie-off: Tested and approved for foot level tie-off
- Operating temperatures: -22°F to 122°F (-30°C to 50°C)
- Aluminum housing
- Under 2.5 lbs. total weight
- Steel snap hook with .75" (19mm) gate opening; different snap hook types available
- Double-locking steel carbiner with 3,600 lb. gate strength included for anchor connection
- Certified to meet OSHA, ANSI Z359.14-2014, Class A, Leading Edge and CSA Z259.2.1 standards

| PRODUCT NO. | MODEL NO. | Webbing Width | Length | Weight | Hook (Gate Opening) | Capacity |
|--------------|---------------|------------------------|-----------------|-----------------------|-----------------------------|---------------------|
| V845822006LE | SRL-65105-6LE | .75" (19mm) webbing | 6 ft. (1.8m) | 2.46 lbs. (1.12kg) | 3/4" snap hook (19mm) | 300 lbs. (136kg) |

Class A — Cable

- Tested and approved for foot level tie-off
- Carabiner hook included for attachment to the anchor point or rear D-ring of the harness
- Available with regular snap hook or lightweight aluminum form hook
- Lightweight composite plastic housing
- 3/16" (5mm) galvanized cable, 10 ft. (3m) working length
- LE minimum fall clearance: 13 ft. (4m)
- Maximum total arrest distance: 24 in. (0.61m) non-leading edge application
- Average arrest force: 765 lbf (3.4kN)
- Minimum setback distance: 16 in. (0.4m)
- Third-party certified to ANSI Z359.14-2014, Class A and Leading Edge, CSA Z259.2.2, meets applicable OSHA standards

| PRODUCT NO. | MODEL NO. | Cable Diameter | Length | Weight | Hook (Gate Opening) | Capacity |
|--------------|----------------|----------------------|----------------|----------------------|-------------------------------|---------------------|
| V845533010LE | SRL-53302-10LE | 3/16" cable (5mm) | 10 ft. (3m) | 5.28 lbs. (2.4kg) | 3/4" snap hook (19mm) | 300 lbs. (136kg) |
| V845534010LE | SRL-53402-10LE | 3/16" cable (5mm) | 10 ft. (3m) | 6.3 lbs. (2.9kg) | 2-1/2" form hook (64mm) | 300 lbs. (136kg) |

QUICK NOTE

Selecting a Dual vs Single SRD?

Dual Self-Retracting Devices allow for 100% tie-off when moving or transitioning between levels or obstacles.





Third Party

Certification

ANSI

(SP)





V845534010LE



SRL-LE



SELF-RETRACTING LIFELINES (SRL) — LEADING EDGE

Third Party Certification


ANSI

(I)

Class B — Cable

- Approved for use in vertical and horizontal applications
- Tested and approved for foot level tie-off
- Additional testing over alternate leading edge materials
- Carabiner hook included for attachment to anchor point
- Aluminum housing for maximum durability
- 3/16" (5mm) galvanized cable lifeline
- LE minimum fall clearance: 13 ft. (4m)
- Minimum set-back distance from edge: 20 in. (50cm); refer to user manual
- Maximum total arrest distance: 54 in. (1.4m) non-leading edge applications
- Average arrest force: 765 lbf (3.4kN)

| PRODUCT NO. | MODEL NO. | Lifeline Type | Length | Weight | Hook Style | Capacity |
|--------------|----------------|----------------------|------------------|-----------------|-------------------|---------------------|
| V845533020LE | SRL-53302-20LE | 3/16" (5mm) Cable | 20' (6m) | 7 lbs. (3 kg) | 3/4" Snap Hook | 300 lbs. (136kg) |
| V845533030LE | SRL-53302-30LE | 3/16" (5mm) Cable | 30' (9m) | 10 lbs. (4.5kg) | 3/4" Snap Hook | 300 lbs. (136kg) |
| V845533040LE | SRL-53302-40LE | 3/16" (5mm) Cable | 40' (12m) | 12 lbs. (5.4kg) | 3/4" Snap Hook | 300 lbs. (136kg) |
| V845533060LE | SRL-53302-60LE | 3/16" (5mm) Cable | 60' (18m) | 16 lbs. (6.9kg) | 3/4" Snap Hook | 300 lbs. (136kg) |

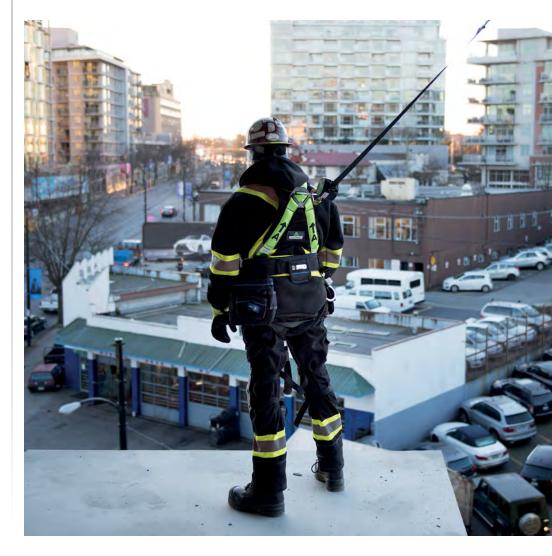



SELF-RETRACTING LIFELINES (SRL) — NON-LEADING EDGE

Class B — Dyneema® Web

- Approved for vertical use only, non-leading edge applications
- Easy and lightweight to carry
- High strength composite plastic housing
- Swivel top
- 1" (25mm) Dyneema® webbing
- Maximum total arrest distance: 54 in. (1.4m) non-leading edge applications



| PRODUCT NO. | MODEL NO. | Lifeline Type | Length | Weight | Hook Style | Capacity |
|-------------|--------------|----------------------|-------------------|----------------------|-------------------|---------------------|
| V845423012 | SRL-40302-12 | 1" (25mm) Webbing | 12' (3.5m) | 2.6 lbs. (1.2 kg) | .75" Snap Hook | 300 lbs. (136kg) |
| V845423018 | SRL-40302-18 | 1" (25mm) Webbing | 18' (5.5m) | 2.6 lbs. (1.2 kg) | .75" Snap Hook | 300 lbs. (136kg) |



V8454230XX SRL-40302-XX

SELF-RETRACTING LIFELINES (SRL) — NON-LEADING EDGE

Class B — Cable

- Approved for vertical use only, non-leading edge applications
- Aluminum housing for maximum durability
- 3/16" (5mm) galvanized cable lifeline
- Fixed handle anchor attachment point
- Maximum total arrest distance: 54 in. (1.4m) non-leading edge applications

| PRODUCT NO. | MODEL NO. | Lifeline Type | Length | Weight | Hook Style | Capacity |
|-------------|---------------|----------------------|-------------------|----------------------|-------------------|---------------------|
| V845533120 | SRL-53302-120 | 3/16" (5mm) Cable | 120' (36m) | 42 lbs. (19.1 kg) | .75" Snap Hook | 300 lbs. (136kg) |
| V845533140 | SRL-53302-140 | 3/16" (5mm) Cable | 140' (42m) | 60 lbs. (27.3 kg) | .75" Snap Hook | 300 lbs. (136kg) |
| V845533170 | SRL-53302-170 | 3/16" (5mm) Cable | 170' (51m) | 75 lbs. (34.1 kg) | .75" Snap Hook | 300 lbs. (136kg) |



SRL-53302-XXX



SELF-RETRACTING LIFELINE (SRL-R) - RESCUE


3-Way Rescue/Recovery

- PeakWorks 3-Way Rescue and Retrieval SLR-R
- Transition from SRL mode to rescue and retrieval mode in seconds
- Aluminum housing for maximum durability
- 3/16" (5mm) galvanized cable lifeline
- Maximum total arrest distance: 54 in. (1.4m) non-leading edge applications

| PRODUCT NO. | MODEL NO. | Lifeline Type | Length | Weight | Hook Style | Capacity |
|-------------|---------------|----------------------|-------------------|----------------------|-------------------|---------------------|
| V845534060 | SRL-53303-60 | 3/16" (5mm) Cable | 60' (18m) | 31 lbs. (14.1 kg) | .75" Snap Hook | 310 lbs. (141kg) |
| V84553496 | SRL-53303-96 | 3/16" (5mm) Cable | 96' (29m) | 48 lbs. (21.8 kg) | .75" Snap Hook | 310 lbs. (141kg) |
| V845534140 | SRL-53303-140 | 3/16" (5mm) Cable | 140' (52m) | 59 lbs. (26.8 kg) | .75" Snap Hook | 310 lbs. (141kg) |






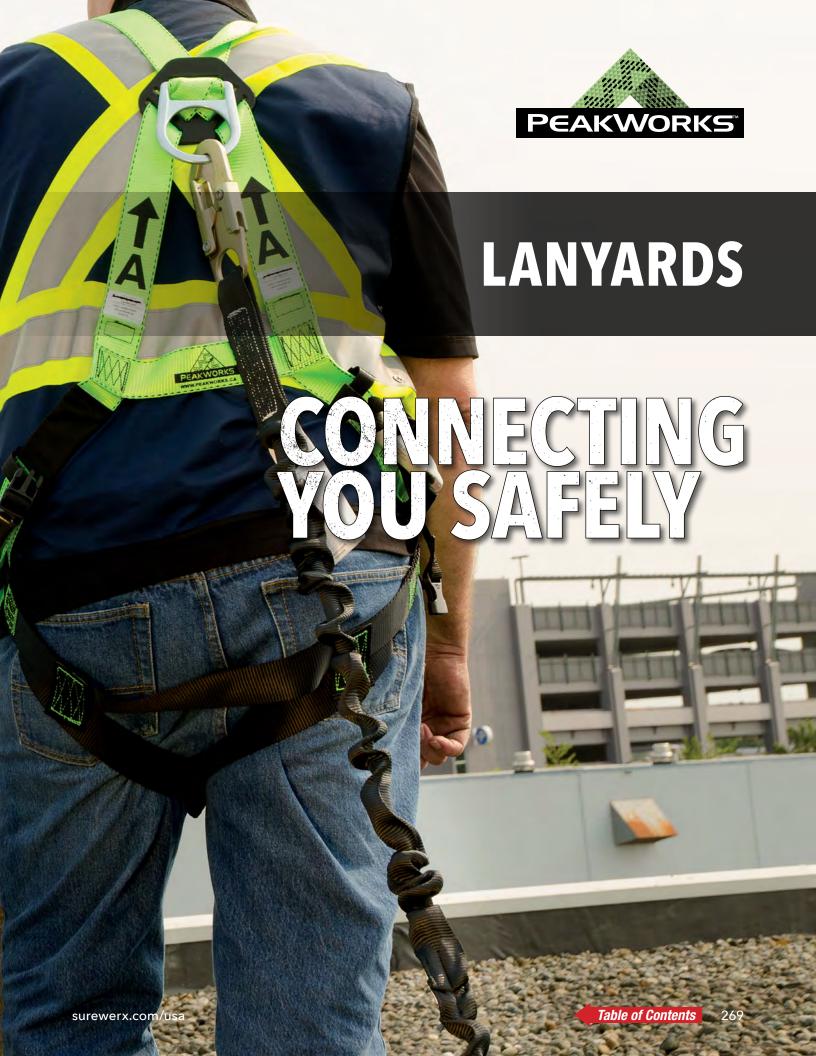



LANYARDS

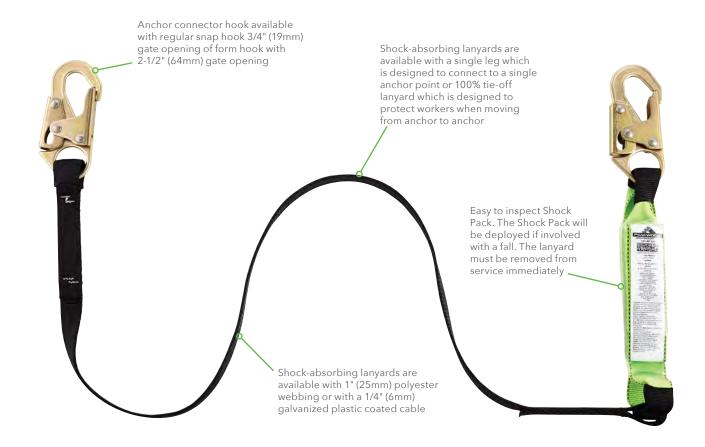



Snap Hook (3/4" (19mm) Gate Opening)



Form Hook (2-1/2" (64mm) Gate Opening)

About Lanyards

- Lanyards are engineered products, and the critical connection component between the full body harness and the anchor. They are sometimes referred to as connectors
- PeakWorks lanyards are designed and tested to comply to strict CSA and ANSI standards
- There is a wide variety of lanyards to suit a wide range of applications
- There are two common types of lanyards: Fall Restraint and Fall Arrest

Fall Restraint Lanyards

- Fall restraint lanyards are a fixed-length connection and have no shock absorbing capability
- These lanyards are designed to limit the distance a worker can move from the anchor point and towards the edge of the structure and should never be used when there is a risk of falling

Fall Arrest Lanyards

 The shock absorbing action of these lanyards limits and reduces the force of a fall on the worker, significantly reducing injury to the body

SP (Shock Pack):

- SP (Shock Pack) lanyards are comprised of "tear webbing" which is woven in a manner that allows the webbing to tear when it has a load applied to it. This tearing absorbs a significant amount of downward force under load, reducing injury
- This tear webbing is folded and shrink-wrapped into a compact 1" \times 2" \times 6" (2.5cm \times 5cm \times 15cm) pack that is sewn into the lanyard next to the body connector
- Cable lanyards are ideal if you're working in abrasive or high-heat environments

SHOCK ABSORBING LANYARDS

Shock Pack (SP)



PeakWorks Shock Pack (SP) shock absorbing lanyards are certified to ANSI Z359.13 standards.

- Made with a superior grade, heavy-duty 1-3/4" (45mm) or 1" (25mm) polyester webbing for maximum strength or 1/4" (6mm) galvanized plastic coated cable, with tear webbing shock absorber
- Resists abrasions and harmful UV rays
- Shock packs are designed to tear the inner webbing to reduce the force the worker feels to an acceptable level





| PRODUCT NO. | MODEL NO. | Style | Single or Double Leg | Weight Capacity | Body | Anchor 1 | Anchor 2 | Length X | Adjustable |
|-------------|-------------|---------------------------------|-------------------------|--------------------|------|---------------|----------|------------------|------------|
| V8104304 | SA-7400-4U | Tear Pack 1" Webbing | Single | 130 to 310 lbs. | Snap | Snap | | 4' (1.2m) | |
| V8104306 | SA-7400-6U | Tear Pack 1" Webbing | Single | 130 to 310 lbs. | Snap | Snap | | 6' (1.8m) | |
| V8104326 | SA-7402-6U | Tear Pack 1" Webbing | Single | 130 to 310 lbs. | Snap | Form | | 6' (1.8m) | |
| V8104300 | SA-7400-6AU | Tear Pack 1" Webbing | Single | 130 to 310 lbs. | Snap | Snap | | 6' (1.8m) | Yes |
| V8104320 | SA-7402-6AU | Tear Pack 1" Webbing | Single | 130 to 310 lbs. | Snap | Form | | 6' (1.8m) | Yes |
| V8104356 | SA-7405-6U | Tear Pack 1" Webbing | Single | 130 to 310 lbs. | Snap | Snap + D-ring | | 6' (1.8m) | |
| V8104406 | SA-84000-6U | Tear Pack 1" Webbing | Double | 130 to 310 lbs. | Snap | Snap | Snap | 6' (1.8m) | |
| V8104426 | SA-84022-6U | Tear Pack 1" Webbing | Double | 130 to 310 lbs. | Snap | Form | Form | 6' (1.8m) | |
| V8108306 | SA-7500-6U | Tear Pack 1/4" PVC Coated Cable | Single | 130 to 310 lbs. | Snap | Snap | | 6' (1.8m) | |
| V8108326 | SA-7502-6U | Tear Pack 1/4" PVC Coated Cable | Single | 130 to 310 lbs. | Snap | Form | | 6' (1.8m) | |
| V8108426 | SA-85522-6U | Tear Pack 1/4" PVC Coated Cable | Double | 130 to 310 lbs. | Snap | Form | Form | 6' (1.8m) | |

See page 263 for welder's lanyards





V81540X LAN-3400-X



V81542X LAN-3402-X



V815100X LAN-1222-X



V815120X LAN-1242-X



V860140 RA-100


RESTRAINT LANYARDS

Preventing a fall is a better way of protecting workers than arresting a fall. For these applications, PeakWorks has a wide selection of fall restraint lanyards. Fall restraint lanyards should never be used if there is any risk of falling.

- Fall restraint lanyards are a fixed length connection and have no shock absorbing capability
- These lanyards are designed to limit the distance a worker can move from the anchor point and towards the edge of the structure and should never be used when there is a risk of falling
- PeakWorks restraint lanyards are made using two types of material a rugged heavy-duty
 polyester webbing or a premium polyester rope and with a variety of hook configurations
- PeakWorks restraint lanyards are available in 4' (1.2m) and 6' (1.8m) lengths

| PRODUCT NO. | MODEL NO. | Laundh | Product Name | Hook | Hook Type | |
|-------------|------------|---|--|----------|-----------|--|
| | MODEL NO. | Length | Product Name | Body | Anchor | |
| V81540X | LAN-3400-X | 4', 6' (1.2m, 1.8m) | Restraint Lanyard with 1" (25mm) Webbing | Snap | Snap | |
| V81542X | LAN-3402-X | 4', 6' (1.2m, 1.8m) | Restraint Lanyard with 1" (25mm) Webbing | Snap | Form | |
| V815100X | LAN-1222-X | 2', 3', 4', 5', 6' (.6m, .9m, 1.2m, 1.5m, 1.8m) | Restraint Lanyard with 5/8" (16mm) Rope | Snap | Snap | |
| V815120X | LAN-1242-X | 2', 3', 4', 5', 6' (.6m, .9m, 1.2m, 1.5m, 1.8m) | Restraint Lanyard with 5/8" (16mm) Rope | Snap | Form | |
| V860140 | RA-100 | 2' (.6m) | Rebar Chain Assembly | (2) Snap | Form | |



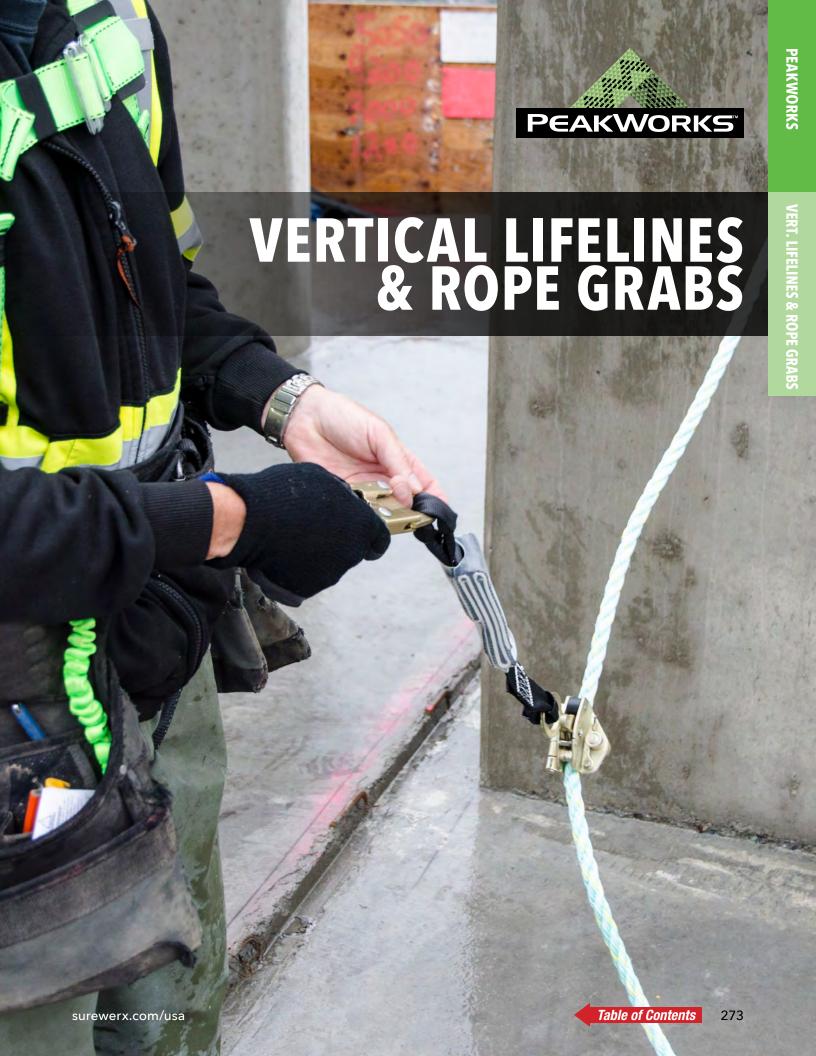





V84013XXX VL-1115-X



V84014XXX VL-1125-X



V84084XXX VL-1825-X

VERTICAL LIFELINES & ROPE GRABS

Lifelines

- Lifelines are specially designed from rope made using high-strength polysteel
- Polysteel is an extruded co-polymer fibre that yields an extremely highstrength, lightweight rope with excellent resistance to acids and alkalis
- PeakWorks vertical lifelines are all 5/8" (16mm) in diameter
- Minimum breaking strength 6,000 lbs (27kN)
- We offer a wide range of lengths with a variety of snap hook/carabiner options
- All PeakWorks lifelines have a back splice at the trailing end to prevent the rope grab from coming off the end of the lifeline
- Certified to CSA Z259.2.5-2012 and meets or exceeds ANSI Z359.15 standards

| | | | | End Configuration | |
|-------------|-----------|--|---|-------------------|--------------|
| PRODUCT NO. | MODEL NO. | Length | Product Name | Anchor End | Trailing End |
| V84013XXX | VL-1115-X | 25', 50', 100' (7.6m, 15.2m, 30.5m) | Premium Vertical Lifeline, 5/8" (16mm) Rope | Carabiner | Back Splice |
| V84014XXX | VL-1125-X | 25', 50', 100' (7.6m, 15.2m, 30.5m) | Premium Vertical Lifeline, 5/8" (16mm) Rope | Snap Hook | Back Splice |
| V84084XXX | VL-1825-X | 25', 50', 100' (7.6m, 15.2m, 30.5m) | Standard Vertical Lifeline, 5/8" (16mm) Rope | Snap Hook | Back Splice |

Note: other lengths available as a special order.

DID YOU KNOW?

Automatic rope grabs are designed to move easily up and down vertical lifelines handsfree to provide continuous fall protection. PeakWorks rope grabs include a shockabsorbing pack to reduce arresting forces in the event of a fall.







VERTICAL LIFELINES & ROPE GRABS

Rope Grabs



- Rope grabs are designed to travel hands-free on 5/8" (16mm) rope
- These automatic rope grabs follow the user during their ascent or descent
- In the event of a fall, the rope grab will "bite" onto the rope and arrest the user's fall
- PeakWorks rope grabs are also equipped with a panic lock feature which "bites" onto the rope even if the user mistakenly pushes the cam up, ensuring that the rope grab will lock and arrest the fall in any situation
- Rope grabs offer the most cost-effective fall protection solution when working at height
- 130 to 310 lb. (60 to 141kg) capacity (combined weight of person, tools, clothing, etc.)
- All Peakworks rope grabs meet or exceed ANSI Z359.15 standards










V830113 RG-11005

| PRODUCT NO. | MODEL NO. Product Name | Product Name | Rope | |
|-------------|------------------------|---|-------------|----------|
| PRODUCT NO. | MIODEL NO. | Flourt Name | Size | Туре |
| V830103 | RG-11015 | ADP Rope Grab with Panic Grab, Small Eye w/SP | 5/8" (16mm) | 3 Strand |
| V830113 | RG-11005 | ADP Rope Grab with Panic Grab, Large Eye w/SP | 5/8" (16mm) | 3 Strand |

surewerx.com/usa Table of Contents 275

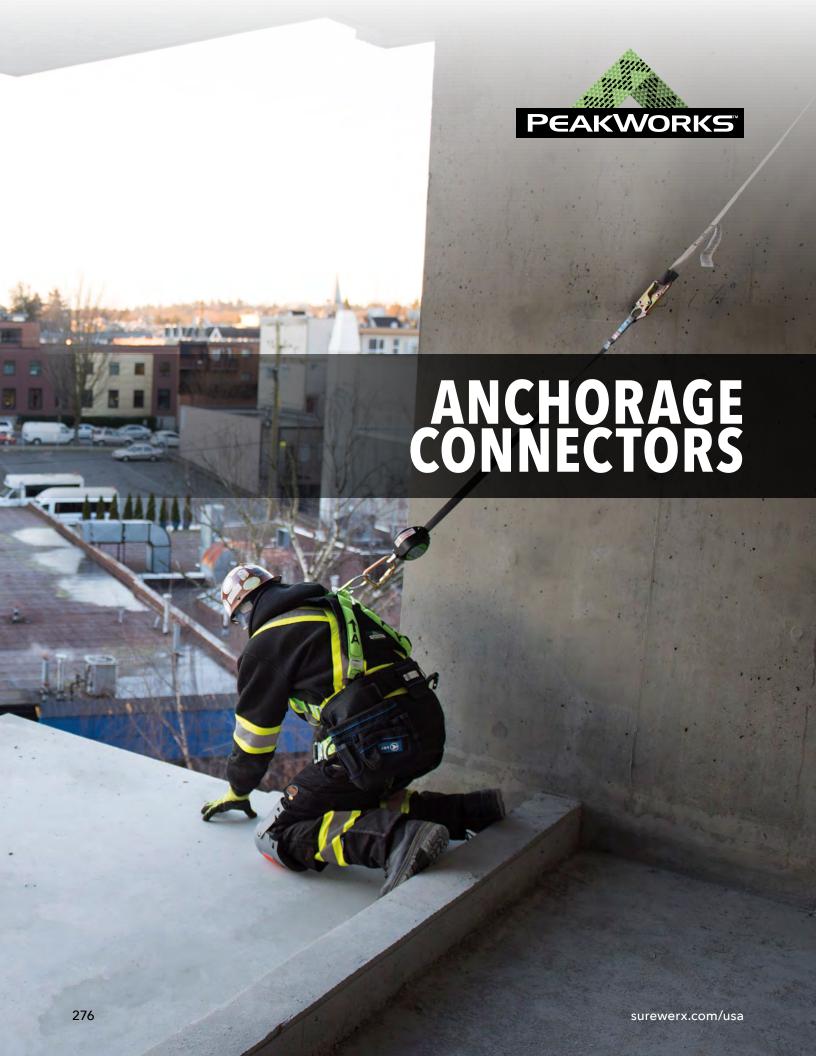

ANCHORAGE CONNECTORS

Anchors and Roof Brackets

- A complete fall arrest system requires three primary components: approved full body harness, connector and anchorage connector
- Anchors can be connected to a variety of materials such as steel, wood and concrete
- PeakWorks offers a wide range of anchor systems including: single-use/reusable roof anchors, sliding beam anchors, concrete hole anchors and permanent anchors
- The anchor should be located directly above the worker to prevent swinging
- The height of an anchor is a key variable when determining fall clearance
- As with all fall protection products, anchors must be inspected by a competent person at a minimum annually
- All PeakWorks anchors are built with a minimum tensile strength of 5,000 lbs (22 kN)
- All PeakWorks anchors meet or exceed CSA Z259.15 and ANSI Z359.18 standards and OSHA requirements
- 310 lb. (141kg) capacity for one worker (combined weight of person, tools, clothing, etc.)

| PRODUCT NO. | MODEL NO. | Product Name | Application |
|-------------|------------|---|-------------|
| V8221111 | CP-10011-1 | Permanent Anchorage with 1/2" (13mm) Hole | Permanent |
| V8221112 | CP-10011-2 | Permanent Anchorage with 5/8" (16mm) Hole | Permanent |
| V8221113 | CP-10011-3 | Permanent Anchorage with 3/4" (19mm) Hole | Permanent |
| V8229001 | RB-9701 | Single-Use Roof Bracket | Temporary |
| V8229100 | RB-9800 | Reusable Roof Anchor Bracket | Temporary |
| V8229104 | RB-9900 | Stainless Steel Reusable Roof Anchor Bracket | Temporary |
| V8221114 | CP-10010-1 | 5K Concrete Swivel Anchor with 5/8" (16mm) Sleeve Anchor | Permanent |
| V8221115 | CP-10010-2 | 5K Steel Swivel Anchor with 1/2" x 4" (13mm x 102mm) G8 Steel Bolt Lock Washer and Lock Nut | Permanent |



Anchors are built with a minimum tensile strength of 5,000 lbs (22kN) but will be limited to the integrity of the structure to which they are being attached. Verify the structure is properly evaluated before connecting the anchorage connector.





V822111X CP-10011-X



V8229001 RB-9701



V8229100 RB-9800





V8221114 CP-10010-1



V8221115 CP-10010-2

Table of Contents





V8222130 CP-11010-1







CP-11010-3

NEW!



V8222138 AC-9900-TROLLEY7

ANCHORAGE CONNECTORS

Overhead Beam Clamps

Overhead beam clamps are designed to attach to overhead structure without the aid of any tools. Simply adjust the size of the clamp to the bottom flange of the beam, lock it in place and its ready to go. The beam anchors provide a safe and practical solution to connecting to overhead beams. PeakWorks offers two styles of beam clamps.

1) Stationary – fixed in one location

2) Sliding – which can follow the worker to prevent a swing fall

Both beam clamps style models have a breaking strength of 5,000 lbs. (22kN)

| PRODUCT NO. | MODEL NO. | Product Name | Size of Beam | Style |
|-------------|------------------|--------------------------------|---------------------------------------|------------|
| V8222130 | CP-11010-1 | Adjustable Sliding Beam Anchor | 3.5" to 13.25" (88.9mm to 336.6mm) | Sliding |
| V8221131 | AC-9450-SBAR | Sky Bar | 3.5" to 12" (88.9mm to 304.8mm) | Stationary |
| V8222150 | CP-11010-3 | Aluminum Super Sliding Beam | 3.5" to 12" (88.9mm to 304.8mm) | Sliding |
| V8222138 | AC-9900-TROLLEY7 | I-Beam Trolley | 3" to 10" (76.2mm to 254mm) | Sliding |



V8222138 AC-9900-TROLLEY7

I-Beam Trolley

- Designed to easily roll along over head I-beams while trailing the worker
- Can be be removed and reused without any tools
- Easily adjust to various I-beam widths ranging from 3" to 10"
- ANSI Z359.18 and meets applicable OSHA standards for $5,000 \, lbf/22 \, kN$

ANCHORAGE CONNECTORS

Drop-In/Drop-Thru Anchors



Removable anchors, developed for fall protection, are safe, lightweight, and surprisingly simple to employ. PeakWorks manufactures three styles of removable anchors

- 1) Drop-Thru Anchors
- 2) Concrete Anchors
- 3) Toggle Anchors

Drop-Thru Anchors

The Drop-Thru Anchor is a removable and reusable anchor designed for overhead applications. Available in three different sizes: 4", 6", and 12" diameter plates. Simply insert the cable end of the anchorage connector to an approved anchor and begin using it. Once the task is complete, pull the cable back through the opening and it's ready to be re-used.

Concrete Anchors

PeakWorks anchors have been tested to meet ANSI Z359.18. They have a long list of benefits above competitive products. A few include:

- Ease of use simply drill the proper size hole into your concrete, blow the dust out with compressed air, and insert the unit
- Multi-directional attributes PeakWorks removable anchors work in horizontal, vertical and overhead surfaces
- Reusability when your job is done, simply fill in the drilled hole if necessary and reuse at your new desired location

Toggle Anchors

- Popular removable bolt anchor due to the portable and re-usable design
- Concrete anchorage connector can be used in variety of fall protection applications
- Breaking strength: 5,000 lbf/22kN
- Meets ANSI Z359.18 and applicable OSHA standards

| PRODUCT NO. | MODEL NO. | Product Name | Size of Open/Hole to install thru/in | Application | |
|-------------|---------------|--------------------------------------|---|-------------|--|
| V8223140 | AC-9452-DTA | Drop-Thru Anchor 4" Plate, 8' Cable | 1-3/4" to 2" min. hole size (4.1cm to 4.4cm) | Temporary | |
| V8223142 | AC-9452-DTA-2 | Drop-Thru Anchor 6" Plate, 8' Cable | 1-3/4" to 2" min. hole size (4.1cm to 4.4cm) | Temporary | |
| V8223144 | AC-9452-DTA-4 | Drop-Thru Anchor 6" Plate, 2' Cable | 1-3/4" to 2" min. hole size (4.1cm to 4.4cm) | Temporary | |
| V8223145 | AC-9452-DTA-5 | Drop-Thru Anchor 12" Plate, 8' Cable | 1-3/4" to 2" min. hole size (4.1cm to 4.4cm) | Temporary | |
| V8223146 | AC-9452-DTA-6 | Drop-Thru Anchor 12" Plate, 4' Cable | 1-3/4" to 2" min. hole size (4.1cm to 4.4cm) | Temporary | |
| V8223147 | AC-9452-DTA-7 | Drop-Thru Anchor 6" Plate, 4' Cable | 1-3/4" to 2" min. hole size (4.1cm to 4.4cm) | Temporary | |
| V8223148 | AC-9452-DTA-8 | Drop-Thru Anchor 4" Plate, 4' Cable | 1-3/4" to 2" min. hole size (4.1cm to 4.4cm) | Temporary | |
| V8222120 | CP-12010-1 | 3/4" (19mm) Concrete Hole Anchor | 3/4" (19mm) | Temporary | |
| V8221121 | CP-12010-2 | 3/4" (19mm) Toggle-Lok Anchor | 3/4" (19mm) | Temporary | |





V8223140 AC-9452-DTA



V8222120 CP-12010-1



V8221121 CP-12010-2





V820910X RAS4



V820950X CAS4



V8205705 V8205704 V8205505 AC-6601 AC-6600-48 AC-6604



V820800X AS-21000-X



ANCHORAGE CONNECTORS

Anchor Slings


- Anchor slings provide peace of mind when a temporary anchor is required
- PeakWorks offers anchor slings using two basic material styles: abrasion-resistant webbing or galvanized cable
- All PeakWorks anchor slings are built to a minimum tensile strength of 5,000 lbs (22 kN)
- All PeakWorks anchor slings meet or exceed CSA and ANSI standards
- Peakworks introduces new line of anchor slings with added wear sleeve for durability



| PRODUCT NO. | MODEL NO. | Product Name | Length | End Configuration | |
|-------------|------------|--|---|-------------------|----------------|
| V820910X | RAS4 | Residential Anchor Sling | 3', 4', 6' (0.9m, 1.2m, 1.8m) | Reinforced Loop | Loop |
| V820950X | CAS4 | Commercial Anchor Sling | 3', 4', 6' (0.9m, 1.2m, 1.8m) | Loop | D-Ring |
| V8205705 | AC-6601 | Choker Sling, 2 D-Rings, 60" L | 5' (1.5m) | 1 Large D-Ring | 1 Small D-Ring |
| V8205704 | AC-6600-48 | Wrap Sling 48" L, 2 D-Rings | 4' (1.2m) | 1 Large D-Ring | 1 Large D-Ring |
| V82005805 | AC-6600 | Wrap Sling 60" L | 5' (1.5m) | Loop | 1 Large D-Ring |
| V8205505 | AC-6604 | Choker Sling, 1 D-Ring, 1 Loop 60" L | 5' (1.5m) | Loop | 1 Large D-Ring |
| V820800X | AS-21000-X | Cable Anchor Sling, 1/4" (6mm) PVC Coated Galv. Cable | 3', 4', 6' (0.9m, 1.2m, 1.8m) | Eye | Eye |
| V820860X | AS-21110-X | Cable Anchor Sling, 1/4" (6mm) PVC Coated Galv. Cable | 2', 3', 4', 5', 6' (0.6m, 0.9m, 1.2m, 1.5m, 1.8m) | O-Ring | O-Ring |

The PeakWorks Fall Protection Tank Trolley $^{\mathrm{TM}}$ is designed for use on water and fuel storage tanks. The Tank Trolley™ provides a 5,000 lbs. anchorage as required by OSHA and ANSI standards. The Tank Trolley simply rides on the top lip of the storage tank and can be used with a standard lanyard or self-retracting lifeline.

- Standards Compliance: Materials meet OSHA 1926.5 subpart M, 1910.66 app. C, and **ANSI A10.14**
- Trolley: Rollers 1/4" steel, powder coated finish with forged steel O-ring attachment, polyurethane composite material
- Capacity: Application 310 lb. designed working load
- TROLLEY6: Storage tanks with minimum 10' diameter, fits 1/4" to 1" flange widths
- TROLLEY6A: Storage tanks with minimum 10' diameter, fits 1" to 1-7/8" flange widths
- Made in USA

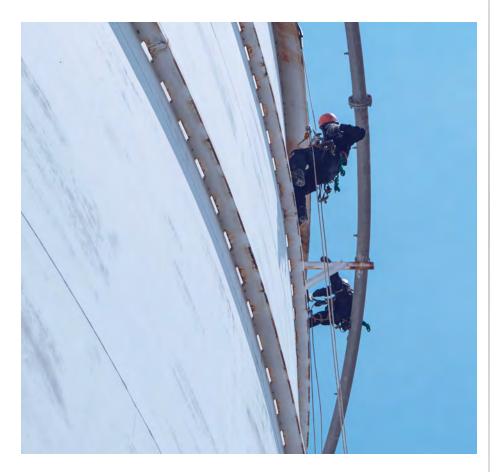

| PRODUCT NO. MODEL NO. | | Description | Flange width | Weight |
|-----------------------|----------------|---------------------------|---------------------------------|-------------------|
| V82235 9900-TROLLEY6 | | Standard Tank Trolley™ | Fits 1/4" to 1" Flange Widths | 14 lbs. (6.4kg) |
| V82236 | 9900-TROLLEY6A | Wide Flange Tank Trolley™ | Fits 1" to 1-7/8" Flange Widths | 14.5 lbs. (6.6kg) |



V82235 9900-TROLLEY6



V82236 9900-TROLLEY6A



9900-TROLLEY6





KITS





All you need in one convenient pail!



Pail-16L







ROOFER'S KITS

RK6 Series Reusable Roofer's Kits



Meet the new OSHA Residential Construction Regulation.

- PeakWorks' Roofer's Kit Fall Protection System includes an adjustable full body harness, a rope grab with integral shock absorber, reusable roof anchor bracket, and a waterproof bucket
- The three-point adjustable full body harness features quick-connect pass-thru buckles and polyester webbing for lightweight comfort and dependability
- The vertical lifeline is specifically designed from high-strength polysteel rope
- The manual rope grab includes an integral 3' shock-absorbing lanyard with a double-locking snap hook
- The reusable roof anchor bracket includes an attachment D-ring

All system components meet or exceed applicable ANSI and OSHA standards.

| MODEL | V8257272 RK6-25 Contains: | V8257275 RK6-50 Contains: |
|------------------------------|---|---|
| Harness FBH-10002A | Polyester webbing Pass-thru buckles Class A harness Universal size Three-point adjustable | Polyester webbing Pass-thru buckles Class A harness Universal size Three-point adjustable |
| Manual Rope Grab RG-12142 | Manual rope grabIntegral 3 ft. shock | Manual rope grabIntegral 3 ft. shock |
| Vertical Lifeline | 5/8" (16mm) co-polymer rope 25' (7.6m) long 6,000 lbs. (27kN) minimum breaking strength | 5/8" (16mm) co-polymer rope 50' (15m) long 6,000 lbs. (27kN) minimum breaking strength |
| Snap Hooks | 3/4" gate opening, steelDouble locking | 3/4" gate opening, steelDouble locking |
| Roof Bracket RB-9800 | Reusable bracket5,000 lb. breaking strength | Reusable bracket5,000 lb. breaking strength |
| Max Working Load | 310 lbs. (141kg)Single person use only | 310 lbs. (141kg)Single person use only |

DID YOU KNOW?

PeakWorks offers two different styles of roofing kits to meet your needs. The **RK6** kit incorporates a three-point compliance harness with quick-connect mating buckles, and the **RK7** kit incorporates a three-point compliance harness with tongue buckles. Both kits include a vertical lifeline with integral manual rope grab. The rope grab includes a shock-absorbing lanyard to reduce arresting forces. The roof anchor requires 3" x #10 screws (not included) to install the anchor to the structure.

ROOFER'S KITS



RK7 Series Reusable Roofer's Kits

Meet the new OSHA Residential Construction Regulation.

- PeakWorks' Roofer's Kit Fall Protection System includes an adjustable full body harness with grommeted leg straps, a rope grab with integral shock absorber, reusable roof anchor bracket, and a waterproof bucket
- The three-point adjustable full body harness features grommeted leg strap buckles and polyester webbing for lightweight comfort and dependability
- The vertical lifeline is specifically designed from high-strength polysteel rope
- The manual rope grab includes an integral 3' shock-absorbing lanyard with a double-locking snap hook
- The reusable roof anchor bracket includes an attachment D-ring

All system components meet or exceed applicable **ANSI** and **OSHA** standards.

| MODEL | V8257282 RK7-25 Contains: | V8257285 RK7-50 Contains: |
|------------------------------|--|--|
| Harness FBH-10022A | Polyester webbing Grommeted leg straps Class A harness Universal size Three-point adjustable | Polyester webbing Grommeted leg straps Class A harness Universal size Three-point adjustable |
| Manual Rope Grab RG-12142 | Manual rope grabIntegral 3 ft. shock | Manual rope grabIntegral 3 ft. shock |
| Vertical Lifeline | 5/8" (16mm) co-polymer rope 25' (7.6m) long 6,000 lbs. (27kN) minimum breaking strength | 5/8" (16mm) co-polymer rope 50' (15m) long 6,000 lbs. (27kN) minimum breaking strength |
| Snap Hooks | 3/4" gate opening, steelDouble locking | 3/4" gate opening, steelDouble locking |
| Roof Bracket RB-9800 | Reusable bracket5,000 lb. breaking strength | Reusable bracket5,000 lb. breaking strength |
| Max Working Load | 310 lbs. (141kg)Single person use only | 310 lbs. (141kg)Single person use only |

| REPLACEMENT PARTS | | | |
|-----------------------|------------|--------------------------------------|--|
| PRODUCT NO. MODEL NO. | | Product Name | |
| V8001000 | FBH-10002A | | |
| V8001200 | FBH-10022A | | |
| V84088025 | | 25' Vertical Lifeline with Rope Grab | |
| V84088050 | | 50' Vertical Lifeline with Rope Grab | |
| V8229100 | | RB-9800 Reusable Bracket | |



All you need in one convenient pail!



Pail-16L











V8252366 Front Model 4400-BA1CKTS



V8252366 Back Model 4400-BA1CKTS

COMPLIANCE KIT



The PeakWorks® Compliance Kit includes an all-in-one harness and shock-absorbing lanyard. The full-body harness features three points of adjustment for ultra-lightweight comfort. Quick-connect pass-thru buckles, located on the chest and legs, make it easy for donning. All of the PeakWorks harnesses include fall indicators for ease of inspection and two lanyard parks for easy and safe storage. The shock-absorbing lanyard is certified to the newest ANSI standards. The shock-absorbing lanyard is permanently attached to the rear dorsal D-ring for simplicity. The lanyard is comprised of "tear webbing", which will significantly limit and reduce the force of a fall on a worker.

V8252366

Model 4400-BA1CKTS

| Description | Compliance Harness | Permanently Affixed Shock Pack Lanyard | |
|-----------------------|---|--|--|
| Style | Class A harnessThree-point adjustable pass-thru buckles | Single leg, tear pack One double-locking snap hook — permanently attached | |
| Materials | Polyester webbingSteel buckles | 1" polyester webbing3/4" gate opening, steel snap hook | |
| Standards | OSHACertified to ANSI Z359.11Certified to CSA Z259.10 | OSHACertified to ANSI Z359.13 | |
| Size | • Universal | • 6' (1.8m) length | |
| Operating Temperature | • -31°F to 95°F (-35°C to 35°C) | • -31°F to 95°F (-35°C to 35°C) | |
| Max Working Load | 130 to 310 lbs. (60 to 141kg)Single person use only | 130 to 310 lbs. (60 to 141kg)Single person use only | |

DID YOU KNOW?

All PeakWorks full body harnesses incorporate the Safe-T-Fold stress indicator in back of the harnesses. If the fold has been deployed, do not use and replace the harness immediately.



The PeakWorks® Contractor Kit includes a harness and shock-absorbing lanyard. The full-body harness features five points of adjustment for maximum comfort (two shoulder, two leg, one chest). Quick-connect pass-thru buckles, located on the chest and legs, make it easy for donning. All of the PeakWorks harnesses include fall indicators for ease of inspection and two lanyard parks for easy and safe storage. The shock-pack lanyard is certified to the newest ANSI standards. The shock-absorbing lanyard is comprised of "tear webbing", which will significantly limit and reduce the force of a fall on a worker.

V8252356

Model 4456-KIT03S

| Description | Contractor Harness | Shock Pack Lanyard |
|---|---|--|
| • Class A harness • Five-point adjustable pass-thru buckles | | Single leg, tear pack3/4" gate opening steel, double-locking snap hooks |
| Materials | Polyester webbingSteel buckles | 1" polyester webbingSteel snap hook |
| Standards | OSHACertified to ANSI Z359.11Certified to CSA Z259.10 | OSHACertified to ANSI Z359.13 |
| Size | • Universal | • 6' (1.8m) length |
| Operating Temperature | • -31°F to 95°F (-35°C to 35°C) | • -31°F to 95°F (-35°C to 35°C) |
| Max Working Load | 130 to 310 lbs. (60 to 141kg)Single person use only | 130 to 310 lbs. (60 to 141kg)Single person use only |



All PeakWorks full body harnesses feature the letter "A" and an arrow pointing to the rear dorsal D-ring. This indicates the connector should always be connected to the rear dorsal D-ring for fall arrest.



V8252356 Front Model 4456-KIT03S



V8252356 Front Model 4456-KIT03S





FK-010

CONTRACTOR KITS



V8252406

- Harness: FBH-10002A Compliance Harness, Class A with pass-thru buckles legs and chest
- Connector: SRL-65105-6LE Self-Retracting Device LE, 6' length with snap hook
- Bag: BAG-001 Large Mesh Bag

| PRODUCT NO. | MODEL NO. | Product Name | Weight Capacity |
|-------------|-----------|--|-------------------------------|
| V8252406 | FK-010 | Compliance Kit: FBH-10002A + SRL-65105-6LE+ BAG-001 | 130 to 310 lbs. (60 to 141kg) |



FK-011

V8252416

- Harness: FBH-10000A Contractor Harness, Class A with pass-thru buckles legs and chest
- Connector: SRL-65105-6LE, Self-Retracting Device LE, 6' length with snap hook
- Bag: BAG-001 Large Mesh Bag

| PRODUCT NO. | MODEL NO. | Product Name | Weight Capacity |
|-------------|-----------|--|-------------------------------|
| V8252416 | FK-011 | Contractor Kit: FBH-10000A + SRL-65105-6LE+ BAG-001 | 130 to 310 lbs. (60 to 141kg) |



FK-005

V8252306

- Harness: FBH-10020A Contractors 1D with Tongue & Grommet Legs
- Connector: SA-7400-6U Shock Pack 6' with Regular Snap Hooks
- Bag: BAG-001 Large Mesh Bag

| PRODUCT NO. | MODEL NO. | Product Name | Weight Capacity |
|-------------|-----------|---|-------------------------------|
| V8252306 | FK-005 | Contractor Kit: FBH-10020A + SA-7400-6U+ BAG-001 | 130 to 310 lbs. (60 to 141kg) |



PEAKWORKS

V8252316

- Harness: FBH-10020A Contractors 1D with Tongue & Grommet Legs
- Connector: SA-7402-6U Shock Pack 6' with One Regular Snap Hook + One Form Hook
- Bag: BAG-001 Large Mesh Bag

| PRODUCT NO. | MODEL NO. | Product Name | Weight Capacity |
|-------------|-----------|---|-------------------------------|
| V8252316 | FK-006 | Contractor Kit: FBH-10020A + SA-7402-6U+ BAG-001 | 130 to 310 lbs. (60 to 141kg) |

V8252326

- Harness: FBH-10020A Contractors 1D with Tongue & Grommet Legs
- Connector: SA-84000-6U 100% Tie-Off Shock Pack 6' with Three Regular Snap Hooks
- Bag: BAG-001 Large Mesh Bag

| PRODUCT NO. | MODEL NO. | Product Name | Weight Capacity |
|-------------|-----------|--|-------------------------------|
| V8252326 | FK-007 | Contractor Kit: FBH-10020A + SA-84000-6U+ BAG-001 | 130 to 310 lbs. (60 to 141kg) |

V8252336

- Harness: FBH-10020A Contractors 1D with Tongue & Grommet Legs
- Connector: SA-84022-6U 100% Tie-Off Shock Pack 6' with One Regular Snap Hook + Two Form Hooks
- Bag: BAG-001 Large Mesh Bag

| PRODUCT NO. | MODEL NO. | Product Name | Weight Capacity |
|-------------|-----------|--|-------------------------------|
| V8252336 | FK-008 | Contractor Kit: FBH-10020A + SA-84022-6U+ BAG-001 | 130 to 310 lbs. (60 to 141kg) |

V8252346

- Harness: FBH-10020B Contractors 3D (One Fall Arrest + Two Side D-Rings) with Tongue and **Grommet Legs**
- Connector: SA-84000-6U 100% Tie-Off Shock Pack 6' with Three Regular Snap Hooks
- Bag: BAG-001 Large Mesh Bag

| PRODUCT NO. | MODEL NO. | Product Name | Weight Capacity |
|-------------|-----------|--|-------------------------------|
| V8252346 | FK-009 | Contractor Kit: FBH-10020B + SA-84000-6U+ BAG-001 | 130 to 310 lbs. (60 to 141kg) |





FK-006



V8252326 FK-007



V8252336 FK-008



V8252346 FK-009

PEAKWORKS

CONFINED SPACE KITS



PEAKWORKS CONFINED SPACE KITS — LIGHTWEIGHT • DURABLE • SAFETY

CONFINED SPACE KITS – COMPLETE KITS



- The PeakWorks engineering team has developed a unique tripod with distinct advantages over the competition
- The PeakWorks TR-100 Tripod offers a built-in pulley system that is located above the head assembly
- The placement of this pulley situates the wire rope cable directly over the center point of the tripod for superior perfect operator balance
- Locating the pulley system above the head assembly also allows the operator increased head room over traditional "below-the-head" pulley systems
- The PeakWorks TR-100 features adjustable aluminum legs complete with swivel steel feet and non-slip rubber bases
- The TR-100 can be used with a 65' (20m) Man-Rated Winch (MW-65G) or, by attaching the tripod mounting bracket, with a PeakWorks SRL-53303 60' (18m) or 108' (33m) recovery style SRL
- 7' (2.1m) tripod features adjustable locking legs, two additional anchorage points, non-slip safety feet and safety chain
- MW-65G man winch features 65' (20m) galvanized cable with swivel hook, 300 lb. (135kg) capacity
- 310 lb. (141kg) capacity (combined weight of person, tools, clothing, etc.)
- Meets or exceeds CSA Z259.15 and ANSI Z359.18 and OSHA requirements





CSK2-65

| PRODUCT NO. | MODEL NO. | Product Name | |
|--|-----------|---|--|
| V85024 CSK1-60 Confined Space Kit: Tripod, 3-Way 60' (18m) SRL and Bag | | Confined Space Kit: Tripod, 3-Way 60' (18m) SRL and Bag | |
| V85025 | CSK2-65 | 2-65 Confined Space Kit: Tripod, 65' (20m) Man Winch and Bag | |
| V85026 | CSK3-60 | Confined Space Kit: Tripod, 3-Way 60' (18m) SRL, 65' (20m) Man Winch and Bag, shown in page 292 | |

PEAKWORKS



V845179065 MW-65G







CONFINED SPACE KITS — REPLACEMENT COMPONENTS

Confined Space Tripod Systems are commonly used for fall arrest, rescue/retrieval, and material handling. Common applications for the PeakWorks confined space system include difficult to access areas such as manholes, sewer systems, tanks, pits, crawl spaces and silos.

Quick note: When using a confined space system, do not use the 3-way SRL as a primary means to lower or retrieve personnel or material. A man winch should be used instead and the 3-way SRL should be used as a secondary fall arrest system.

PeakWorks recommends the use of a confined space yoke in combination with a Class AE full-body harness when lifting or lowering personnel in to a confined space.

PeakPro Plus Series



V800517X Page 247

Contractor Series



V8002030 Page 255

| PRODUCT NO. | MODEL NO. | Product Name |
|-------------|---|--|
| V845179065 | MW-65G 65' (20m) Man Winch with 3/16" (5mm) Cable and Swivel Hook | |
| V85011 | 7' (2.1m) Tripod with Chain and Pulley | |
| V860005 | BAG-005 | Tripod Carrying Bag (see page 303) |
| V855130 | CP-15300-3 | Confined Space Yoke |
| V8460 | SRL-53303-BRKT | Tripod Mounting Bracket for SRL-53303 |
| V860153 | CP-41210-3 | Stainless Steel Pulley – Single Oscillating Side Plates (see page 297) |

RESCUE PRODUCT KITS



- OSHA requires that all employers meet the requirement for prompt rescue including personal escape, self rescue, and assisted rescue before employees work at heights.
- As time is critical when responding to a worker in need, it is incumbent upon all job sites to have the right equipment and proper training available in case of an emergency.
- PeakWorks offers a wide range of equipment and training to help you develop the rescue system required for your specific application.
- Contact your representative for details.


Third Party Certification

Res-Q-Pole

- The PeakWorks Res-Q-Pole with Res-Q-Head is an innovative and effective solution designed to remotely connect a carabiner to a fallen worker or anchor
- The pole is a strong yet lightweight fiberglass-constructed telescoping pole that reaches from 6' to 12' (1.8 to 3.7m).
- A lightweight bracket holds the carabiner open until the operator hooks onto the victim's D-ring or anchor and pulls back. At that point, the carabiner is released from the head and snaps shut.
- Designed for use with the CP-03015-1 carabiner (sold separately).

Res-Q-Kit

- The Res-Q-Kit is a unique 4:1 100' (30.4m) raise and lower kit; it allows a person to be lowered using friction or raised by using a mechanical one-directional pulley.
- The Res-Q-Kit is our most effective retrieval kit.

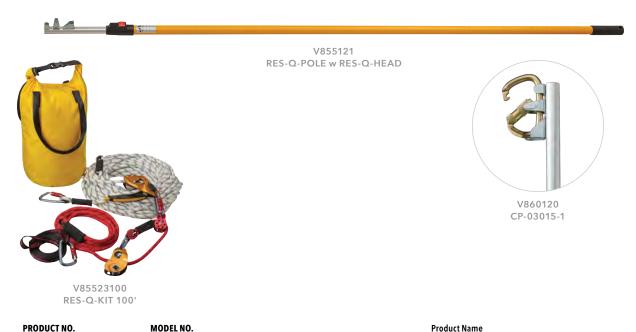

PRODUCT NO. MODEL NO. Product Name

V855121 RES-Q-POLE w/ RES-Q-HEAD Rescue Pole, Telescoping 6' to 12' (1.8m to 3.7m), with Rescue Head Carabiner Attachment

V85523100 RES-Q-KIT 100' Res-Q-KIT 100' (30.4m)

About Confined Space

A confined space is an area, other than an underground working, that:

- is enclosed or partially enclosed;
- is not designed or intended for continuous human occupancy;
- has limited or restricted means for entry or exit that may complicate the provision of first aid, evacuation, rescue or other emergency response or service;
- is large enough and so configured that a worker could enter to perform assigned work

Confined space has limited openings for entry and exit. Examples would be spaces such as: silos, vats, ship holds, sewers, tunnels, large pipelines and other such spaces that humans could enter to perform work.



CONFINED SPACE AND RESCUE KITS

Davit Systems

Davit systems are a permanent or temporary solution for confined space where a traditional tripod does not meet your needs. PeakWorks' davit system offers numerous configurations to suit an application.

Davit system includes:

- Davit V845534060, 3-way SRL-R rescue, and V845179065 man/material winch.
- Lightweight and portable
- High strength construction
- Easy, fast set up
- Man-rated for work positioning, confined space entry/retrieval, rescue, fall protection and material handling
- Rated for working load limit of one person (310 lbs capacity including clothing, tools and equipment)
- Legs can be adjusted to extend up to 6', 75" entry point
- Reach 28'
- Height 84"
- Weight 89 lbs. (includes weight of 3-way SRL and winch)

Standards compliance:

- Work Positioning: OSHA 29 CFR 1926, subpart L
- Rescue: **ANSI Z359.4**
- Confined Space: **OSHA 1910.146, ANSI Z117.1**



NEW!

V85043 Davit Arm System

| PRODUCT NO. | MODEL NO. | Product Name |
|-------------|-----------|--|
| V85043 | DSK3-60 | Complete Davit System with 3-Way SRL, 60' length, Man/Material Winch, 65' length |

Give us a call to help you design your confined space system

HARDWARE AND ACCESSORIES





V860001 BAG-001



V860004 BAG-004



V860005 BAG-005



V860006 BAG-006





V860120 CP-03015-1



V860121 CP-03015-2



V860901 MERCH-TORSO



V860904 ABC-DISPLAY



V860130 CP-04011-1



V860153 CP-41210-3

- Educate your customers on the ABCs of Fall Protection:
 - Anchorage
 - Body Support
 - Connecting Means
- Eye catching innovative display maximizes sales and profit
- Fully customizable to meet the needs of your industry
- Designed for use on floor, peg board, or slat wall
- Includes 25 "Know Your ABCs Fall Protection Guide"
- Hardware included and easy to set up
- Total dimensions are 60" length x 47" width

| PRODUCT NO. | MODEL NO. | Product Name | |
|-------------|-----------------|---|--|
| V860001 | BAG-001 | Large Mesh Harness Bag 15" x 12" (38cm x 31cm) | |
| V860004 | BAG-004 | PeakWorks Carrying Bag 10" x 12" x 12" (25cm x 31cm x 31cm) | |
| V860005 | BAG-005 | Tripod Carrying Bag for TR-100 10" x 58" x 10" (147cm x 25cm x 25cm) | |
| V860006 | BAG-006 | Premium Tripod Carrying Bag for TR-100 15" x 60" (38cm x 152cm) | |
| V860402 | RFID-1 | RFID Pouch with Grommet | |
| V860901 | MERCH. TORSO | Merchandising Torso for Harness | |

| PRODUCT NO. | MODEL NO. | Product Name | |
|-------------|-------------|---|--|
| V860120 | CP-03015-1 | Carabiner 1" (25mm) CSA CE | |
| V860121 | CP-03015-2 | Carabiner 3/4" (19mm) CSA for CG-9001 & SRL-10301-8 | |
| V860130 | CP-04011-1 | Carabiner 2" (50mm) CSA for Scaffolding | |
| V860153 | CP-41210-3 | Tripod Pulley | |
| V860904 | ABC-DISPLAY | ABC Display designed for use on floor, peg board or slot wall, fully customizable | |
| | | | |



LADDER SAFETY SYSTEM






Fixed ladders provide stability when ascending to an elevated work surface because they are fastened to a building or a secure surface. In the past, OSHA has required cages for ladders taller than 20 feet, but as of November 19, 2018, fall protection is required on ladders taller than or that extend beyond 24 feet. Several of the important changes are listed below.

- New height requirement. Fall protection is required on ladders taller than or that extend beyond 24 feet.
- New equipment specification. As of November 19, 2018, cages are no longer considered compliant fall protection in newly-installed ladders. To meet OSHA standards, a personal fall arrest system or a ladder safety system is required.
- Repair/replacement specifications. As of November 19, 2018, a personal fall arrest ladder system or ladder safety system will be used to replace any damaged or nonfunctioning section, cage, or well that was previously installed on a fixed ladder.
- Need more information? For a more detailed explanation of OSHA 1910, visit www.osha.gov/walking-working-surfaces.

PeakWorks® offers two different ladder safety systems that meet or exceed the new regulations:

- Fixed Rail System
- Cable System

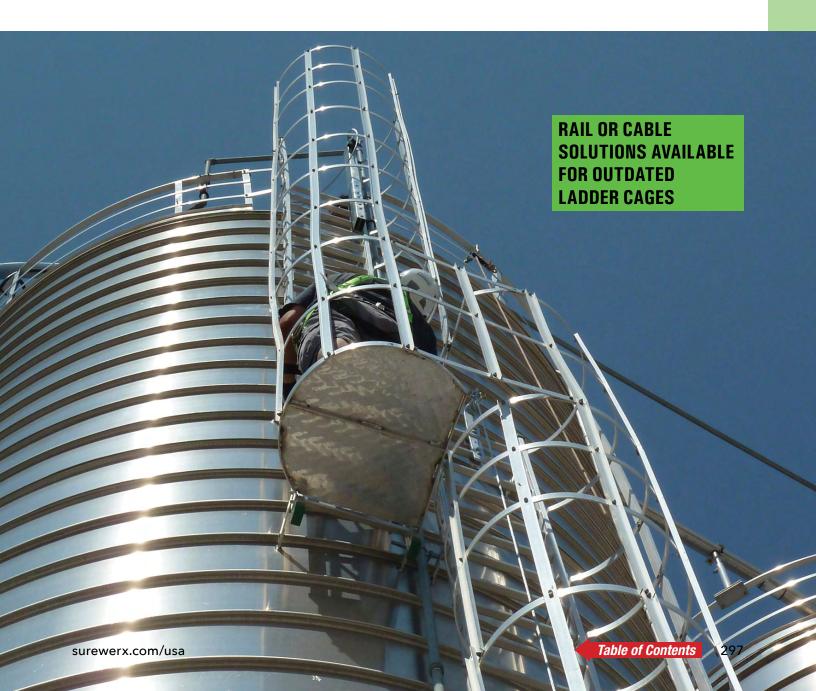

LADDER SAFETY SYSTEM — CABLE

PeakWorks® vertical cable ladder systems are designed for hands-free movement and 100% protection. The system consists of a top and bottom bracket, and a cable that is attached to these brackets at both ends. The cable grab connects the worker to the system and provides a hands-free climb without ever having to manipulate the cable grab. For longer systems, PeakWorks® provides intermediate brackets to minimize the vibration of the system.

Systems come in standard lengths of 30', 50', 100', and 200' which are in stock and can be customized for exact requirements.

Features:

- Fewer parts allow for simple installation and inspection
- Pre-swaged cable termination; 7x19 high-strength galvanized 3/8" steel cable provides simple and easy installation and low maintenance
- System designed for ladder rung installation only; contact SureWerx for climb extension and removable extension options coming soon
- Designed working load is 310 lbs.
- Standards Compliance: ANSI A10.14, OSHA 1910.66, 1926.500

| ORDERING NO. | Cable Length | Guides Included |
|--------------|---------------------------------|-----------------|
| V865420 | 30' Cable Ladder Safety System | 0 |
| V865423 | 50' Cable Ladder Safety System | 1 |
| V865428 | 100' Cable Ladder Safety System | 3 |
| V865438 | 200' Cable Ladder Safety System | 6 |

Above kits include all hardware below:

Upper and lower brackets; specified aircraft cable length; 7x19 galvanized aircraft cable, 3/8"; cable guide for every 25' spacing; and Peakworks CableGrab™ Safety Sleeve

Don't forget your PeakWorks harness!



See pages 242–256 for our complete offering


LADDER SAFETY SYSTEM — CABLE

CableGrab™

The CableGrab™ is a detachable sliding device which moves freely up or down hands free on the 3/8" galvanized steel cable. When the upward force is removed, the CableGrab device automatically locks at any point on the cable. The instantaneous locking is achieved through an effective cam-locking system. The system includes a double-locking carabiner which is to be used when securing the CableGrab™ device to the climber's full body harness.

- $\bullet~$ The CableGrab $^{\text{\tiny{TM}}}$ glides freely up or down the cable as the worker climbs
- Dual independent cams designed to immediately lock on to the cable and arrest the fall. The CableGrab™ will remain locked until the worker can step back onto the ladder or be rescued
- Easy to install and detach anywhere along the cable
- Intended for use on 3/8" diameter solid core cable system
- Intended for use with a 2" self-locking carabiner and attached to a front D-ring full-body harness
- Maximum length of the connector to the wire grab from the harness should not exceed 9'
- 2.75 lbs lightweight construction

| PRODUCT NO. | Designed Working Load | Dimensions |
|-------------|-----------------------|----------------|
| V865192 | 310 lbs. | 5" x 8" x 2.5" |

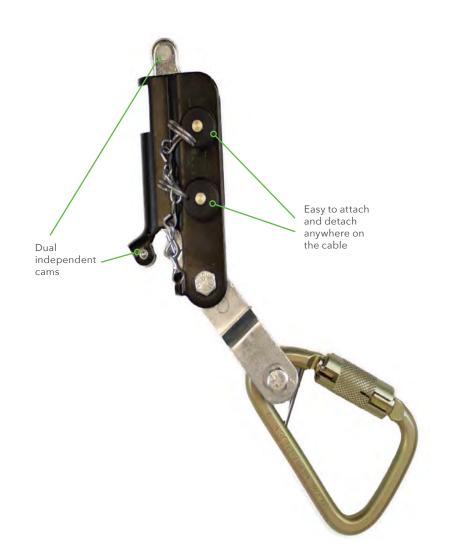





CableGrab™



Top



Bottom



Cable Guide



LADDER SAFETY SYSTEM — RAIL

2000 Series Climb-Rite® Fixed Rail Ladder Safety System

The Climb-Rite® fixed rigid rail ladder system offers workers 100% fall protection when climbing permanent ladders. Each are custom designed by our in-house engineering staff to provide the right solution for your needs. The system works by bringing four hardened steel brakes into contact with the rail as soon as a fall is detected. Using a detachable sliding sleeve that rolls freely up and down the rail, the Climb-Rite® system can be used both above and below ground, and on interior or exterior surfaces.

100% Fall Protection for Fixed Ladders

The complete climbing system includes the Climb-Rite® device, 10' rail sections, rail splices, rail stops, parking pins, and rung clamps. The system has been designed without rail notches or serrations that can corrode or rust. Rail extensions and unique SkySwivel™ rotation device are available for safe ladder access and egress.

Features:

- System glides effortlessly, allowing hands-free movement up and down the ladder
- Easy to install, remove, and maintain
- Climbing device weighs only 2 lbs.
- All ladder hardware is corrosion-resistant stainless steel
- Type 316 stainless steel rail is available for marine or other corrosive environments
- Can be mounted to side or center of ladder
- Ladder extensions available
- Accommodates multiple workers
- Easy to order complete kits and simple installation kits
- Meets OSHA and ANSI standards

| PART NO. FOR STAINLESS STEEL | SYSTEM LENGTH | Section of 10 ft. Rails | Number of Ladder Rung Clamps Included |
|---------------------------------|------------------|----------------------------|--|
| V865191 | 10' | 1 | 3 |
| V865193 | 20' | 2 | 5 |
| V865195 | 30' | 3 | 8 |
| V865196 | 40' | 4 | 10 |
| V865197 | 50' | 5 | 12 |
| V865198 | 60' | 6 | 14 |
| V865199 | 70' | 7 | 16 |

Kits include 1" diameter round rung clamps. Contact SureWerx for additional shapes and sizes.

Give us a call to help you design your Climb-Rite® Fixed Rail Ladder System

301

LADDER SAFETY SYSTEM — RAIL

Climb-Rite® Trolley



- Detachable sliding safety device that attaches to a vertical fixed rail for fall arrest protection
- Weighs 3.25 lbs.
- Made of CNC-machined aluminum with stainless steel pins, Zytel[™] roller bearings, stainless steel spring, and stainless steel bolts
- Fits a 1/2" \times 2" stainless steel rail or T-shaped aluminum 1/4" \times 2" rail
- Swivel snap hook is permanently attached to the D-ring on the Climb-Rite® device
- Complies to OSHA 1910.27(d) & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

| PART NO. | Designed Working Load | Dimensions |
|----------|-----------------------|------------------|
| V865190 | 310 lbs. | 4" x 3-1/2" x 3" |





2000 Climb-Rite® Trolley

surewerx.com/usa Table of Contents



Stainless steel rail



V8651203



Removable Ladder Extension – Top



Bottom

LADDER SAFETY SYSTEM — RAIL

Rail

- Used for the Climb-Rite® ladder climbing system and the RailWalker® system
- Connects to ladder with rung clamps
- Connections are spaced every 6" space on stainless steel rails
- Join sections of rail using rail splice 9200-SSPL
- Complies to OSHA 1910.27(d) & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

| PART NO. | Dimensions | Material | Weight |
|----------|-----------------|---------------------|---------|
| V8651164 | 10' x 2" x 1/4" | 316 Stainless Steel | 18 lbs. |
| V8651162 | 10' x 2" x 1/4" | 304 Stainless Steel | 18 lbs. |
| V8651126 | 10' x 2" | T6 Aluminum | 12 lbs. |

Rail Splice Plate

- Rail splice plate for the Climb-Rite® ladder climbing system
- Weighs 1.56 lbs.
- Made of 304 series stainless steel
- Includes stainless steel hardware
- Complies to OSHA 1910.27 & 1926.1053
- Complies to ANSI A10.14

| PART NO. | Material | |
|----------|---------------------|--|
| V8651203 | 304 Stainless Steel | |

Permanent Ladder Extension

- Stainless fixed ladder extension for the Climb-Rite® Ladder climbing system
- Weighs approximately 10 lbs.
- Made of 316 series stainless steel or 304 series stainless steel
- Connects to ladder with two rung clamps
- Complies to OSHA 1910.27 & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

| PART NO. | Dimensions | Material |
|----------|------------|---------------------|
| V8651153 | 66" long | 304 Stainless Steel |
| V8651154 | 66" long | 316 Stainless Steel |

Removable Ladder Extension Kit

- $\bullet \;\;$ Allows the Climb-Rite® System to extend above the ladder
- Includes top and bottom portion of removable ladder for the Climb-Rite® ladder climbing system
- Weighs approximately 20 lbs.
- Complies to OSHA 1910.27 & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

| PART NO. | Dimensions | Material |
|----------|--------------------|---------------------|
| V8651161 | 2" wide x 66" long | 316 Stainless Steel |
| V8651160 | 2" wide x 66" long | 304 Stainless Steel |

LADDER SAFETY SYSTEM - RAIL



Ladder Rung Clamp

- Attachment hardware to connect PeakWorks ladder safety systems to ladder rungs
- Weighs .4 to .68 lbs.
- Made of 316 series stainless steel
- Rung clamps also available for other shapes and sizes; contact SureWerx
- Complies to OSHA 1910.27 & 1926.1053 for Ladder Safety Devices
- Complies to ANSI A14.3 (1992) Fixed Ladder Safety Standard

Round


| PART NO. | Rung Clamp Size | |
|----------|-----------------|--|
| V8651173 | 5/8" Round | |
| V8651175 | 3/4" Round | |
| V8651182 | 7/8" Round | |
| V8651185 | 1" Round | |

Square

| PART NO. | PART NO. Rung Clamp Size | |
|----------|--------------------------|--|
| V8651176 | 3/4" Square | |
| V8651187 | 1" Square | |
| V8651189 | 1-1/4" Square | |

Diamond

| PART NO. | Rung Clamp Size |
|----------|-----------------|
| V8651184 | 1" Diamond |

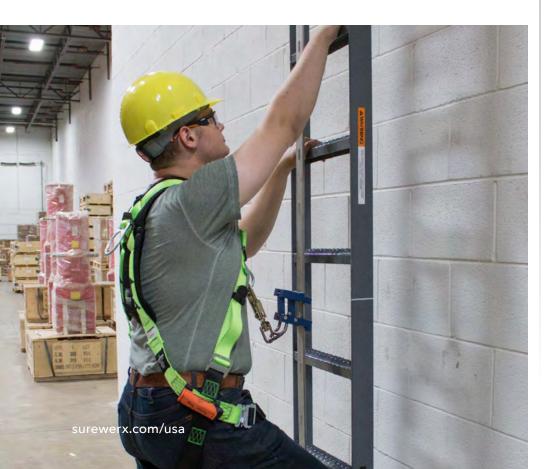




Round



Square



Diamond

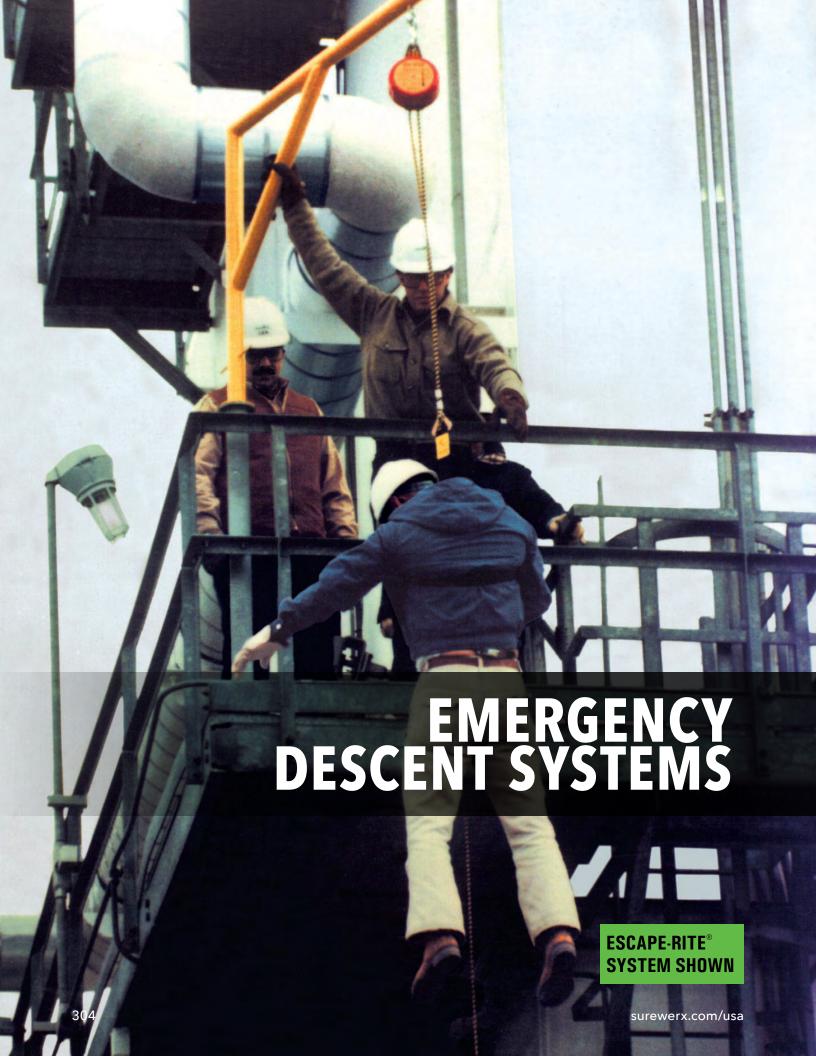

EMERGENCY DESCENT SYSTEMS

Escape-Rite® Series

PeakWorks' Escape-Rite® is an emergency controlled descent device that has been trusted in the field for decades. The Escape-Rite® device helps employers meet the OSHA requirement for prompt rescue including personal escape, self-rescue and assisted rescue. It is compact, lightweight, and very simple to use. Its bi-directional design provides the capability for more users to evacuate in a short period of time. As a descent is initiated, the other end of the rope ascends, making it ready for another rescue automatically. Available in two descent rate options of 3' or 6' per second, depending on the height and number of users needed to evacuate. Angled descent packages are available for approved applications ranging from 45 to 90 degrees.

- Unit Dimensions: 18" x 9.75" x 8"
- Maximum Working Load: 400 lbs. (181 kg) one person descent at a time
- Weight: Unit w/ spool: 12.25 lbs. Cable: .06 lb./ft.
- Made in the USA

| PRODUCT NO. | MODEL NO. | Description | System Lengths | User Weight Capcity |
|-------------|-------------|---|----------------------------------|---|
| V85531-XX | 1003-DEVXXX | Escape-Rite descent rate approx. 3'/s (0.91m/s) | 10'-300' (3m to 91.4m) | 400 lbs. (181kg), one person descent at a time |
| V85532-XX | 1006-DEVXXX | Escape-Rite descent rate approx. 6'/s (1.83m/s) | 10'-300' (3m to 91.4m) | 400 lbs. (181kg), one person descent at a time |

-XXX denotes the length of the system

Escape-Rite Applications

- Ski lift rescue
- Portable rescue
- High-rise buildings
- Overhead crane cabs
- Offshore oil rig platforms
- Scaffolds

PeakWorks Advantage

- Fully automatic controlled descent
- Complete system, simple to use
- No power source or special skills required to operate

Escape-Rite® Accessories

| PRODUCT NO. | MODEL NO. | Description | System Lengths |
|-------------|-------------|-------------------------|----------------------------------|
| V855385 | 1000-DC000 | Escape-Rite dust cover | 10'-100 ' (3m to 30.5m) |
| V855383 | 1000-CONTNR | Weather-proof container | 10'-300' (3m to 91.4m) |





V85531-XX 1003-DEVXXX



V855385 1000-DC000



V855383 1000-CONTNR






ENGINEERED SYSTEMS

Permanent Horizontal Lifelines

Permacable® Systems

The PeakWorks Permacable® system is pre-engineered, synthetic cable designed for horizontal lifeline applications. It is lightweight, strong, and has an excellent resistance to weather and chemicals. The synthetic cable reduces the forces transferred to the anchorage. Permacable® meets all recommended OSHA requirements for horizontal lifelines and can span up to 200' without intermediate supports, unlike traditional steel cable which require supports every 30' to 50'. It can support up to two workers at a time. A special red inspection liner in the cable alerts the user to wear or damage.

- Lightweight; only 15 lbs. per 100'
- Strong tensile strength 16,000 lbs.
- Spans up to 200' between anchorage and weighs only 15 lbs. per 100'
- Low anchorage points forces
- Low sag
- High chemical and wear resistance
- Adjustable length allows for use in permanent or semi-permanent applications.
- Special red liner alerts user to wear or damage. Allows up to four workers.
- Variety of prefabricated anchor points, posts and inverted L's are available.
- Meets OSHA 1910.66, 1926 subpart M
- Made in the USA

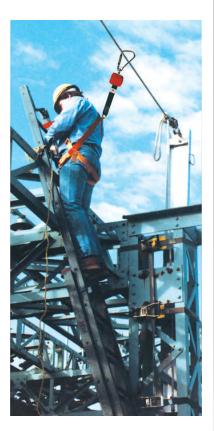

Temp HLL (Temporary Horizontal Lifeline)

Temporary, polyester rope horizontal lifeline system with bucket storage

eatures

- Temporary, polyester rope horizontal lifeline that is ideal for electrical, built-up-scaffolding, tanks, vessels and catwalks.
- Low anchorage forces
- High strength, chemical resistant polyester rope lifeline
- Quick set-up and disassembly
- Continuous protection
- Spans up to 150' for one or two workers
- Three-strand polyester rope allows easy inspection of inner fibers
- Rope vise makes tensioning easy
- One system can be used for many different spans
- Meets OSHA and ANSI standards

Specifications

- Type: Polyester Rope Horizontal Lifeline Kit
- Length: 30' to 100'
- Standards: Meets OSHA 1910.66, 1926 subpart M
- Made in the USA

| PRODUCT NO. | MODEL NO | Description |
|-------------|--------------|-----------------------------|
| V865321 | 9450-BW030BG | 30' Beamwalker Kit in a Bag |
| V865324 | 9450-BW050BG | 50' Beamwalker Kit in a Bag |
| V865327 | 9450-BW075BG | 75' Beamwalker Kit in a Bag |

Give Us a Call for Your Turnkey Engineered Systems









PEAKWORKS TOOL COLLAR

A Complete Tool Tethering Safety System!

- PeakWorks introduces the patented Tool Collar tool tethering system, designed to protect workers from tools dropped at height
- Developed and manufactured in Canada, the Tool Collar system offers a unique tool attachment product that provides the strongest, most secure tool anchor clamping mechanism in the market
- The high-strength HDPE clamps can be securely mounted onto a wide variety of flat, hex, and round shaped tool bodies, ensuring a powerful and positive tether anchor point
- HDPE materials work in both extreme cold and high heat applications and are very durable and long lasting
- The clamps are secured using high-strength fasteners and are easily installed and removed using
 the hex key wrench provided in the kit
- Unlike traditional heat-tape anchoring systems, our clamps can be reused and/or repositioned at any time — a true cost saving system
- Bonus Tool Collar anchor clamps have been specially designed to prevent tools from falling through commonly used construction site grating (19-4)
- No other tool tethering program offers this added safety feature!
- All Tool Collar anchor clamps feature a strong, molded eye hole for quick attachment to/ detachment from wrist or standard lanyards with built-in carabiners
- Currently there are no ANSI or CSA standards for tool tethering systems; however, all Tool Collar products were subjected to an extreme and rigorous series of tests at CSA's test lab to ensure maximum peace of mind and safety
- All Tool Collar anchor clamps are available in individual blister packs or 10-piece bulk packs (five bulk packs 50 pieces per box)

Tool Collar Round Clamp

- Designed for use with round and hex shank tool bodies
- Available in four sizes: 1/2", 5/8", 3/4" and 7/8"

| PRODUCT NO. | MODEL NO. | Туре | Size | Package Qty. |
|-------------|------------|-------|------|--------------------|
| V8561101 | TT-1000-1 | Round | 1/2" | 1 Piece (Blister) |
| V8561102 | TT-1000-10 | Round | 1/2" | 10/Box, 50/Carton* |
| V8561201 | TT-2000-1 | Round | 5/8" | 1 Piece (Blister) |
| V8561202 | TT-2000-10 | Round | 5/8" | 10/Box, 50/Carton* |
| V8561301 | TT-3000-1 | Round | 3/4" | 1 Piece (Blister) |
| V8561302 | TT-3000-10 | Round | 3/4" | 10/Box, 50/Carton* |
| V8561401 | TT-4000-1 | Round | 7/8" | 1 Piece (Blister) |
| V8561402 | TT-4000-10 | Round | 7/8" | 10/Box, 50/Carton* |

Tool Collar Flat Clamp

- Designed for use with wide or flat tool bodies
- Available in two sizes: 15/16" W x 5/16" H (small) and 1-15/16" W x 9/16" H (large)
- $\bullet~$ Small flat clamp fits a range of wrenches of approximately 7/16" to 1-1/4"
- Large flat clamp fits a range of larger wrenches approximately 1-1/4" to 1-7/8"

| PRODUCT NO. | MODEL NO. | Туре | Size | Package Qty. |
|-------------|------------|------|------------------|--------------------|
| V8561501 | TT-5000-1 | Flat | 15/16" x 5/16" | 1 Piece (Blister) |
| V8561502 | TT-5000-10 | Flat | 15/16" x 5/16" | 10/Box, 50/Carton* |
| V8561601 | TT-6000-1 | Flat | 1-15/16" x 9/16" | 1 Piece (Blister) |
| V8561602 | TT-6000-10 | Flat | 1-15/16" x 9/16" | 10/Box, 50/Carton* |



Tool Collar Press Block

- Designed for use with round and hex shank tool bodies and larger tools
- Available in two sizes: 1/2" to 3/4" and 1-1/16" to 1-1/4"
- Comes with standard hex-shaped opening and includes a separate rubber insert that can be placed between the tool and the clamp for extra sizing compatibilities and increased clamping grip

| PRODUCT NO. | MODEL NO. | Туре | Size | Package Qty. |
|-------------|------------|-------------|-------------------|--------------------|
| V8561701 | TT-7000-1 | Press block | 1/2" to 3/4" | 1 Piece (Blister) |
| V8561702 | TT-7000-10 | Press block | 1/2" to 3/4" | 10/Box, 50/Carton* |
| V8561801 | TT-8000-1 | Press block | 1-1/16" to 1-1/4" | 1 Piece (Blister) |
| V8561802 | TT-8000-10 | Press block | 1-1/16" to 1-1/4" | 10/Box, 50/Carton* |

Tool Collar Lanyards

- The PeakWorks Tool Collar tethering system includes two specially designed lanyards that connect the tool anchor clamp to either the operator or to a suitable anchor point
- The wrist lanyard features a built-in heavy duty adjustable wrist collar on one end and a small carabiner on the other, conveniently tethering the tool to your wrist
- The standard lanyard features two small carabiners designed to connect to the tool anchor clamp and the other end to operator (or a suitable anchor)
- The small carabiner is designed to fit into the molded eye hole built-in to each of the Tool Collar HDPE clamps and is used to tether the tool to your body or to a suitable fixed anchor
- Both lanyards can also be used and mounted to variety of other tools in the market that feature hanging hole openings (i.e., adjustable wrenches and pipe wrenches)
- Tool Collar lanyards are designed for use with tools with a maximum weight of 15 lbs.
 Do not exceed this weight limitation

| PRODUCT NO. | MODEL NO. | Туре | Size (unstretched) | Package Qty. |
|-------------|--------------|---|--------------------|-----------------------|
| V856210 | TT-9900 | Wrist | 13" | 1 Piece c/w Hang Card |
| V856211 | TT-9900-10 | Wrist | 13" | 10/Box, 50/Carton* |
| V856220 | TT-9901 | Standard | 32" | 1 Piece c/w Hang Card |
| V856221 | TT-9901-10 | Standard | 32" | 10/Box, 50/Carton* |
| V856230 | TT-9902 | Slim line no locking carabiners | 22.5" | 1 Piece c/w Hang Card |
| V856231 | TT-9902-BULK | Standard | 13" | 10/Box, 50/Carton* |
| V856240 | TT-9903 | Slim line with locking carabiners | 22.5" | 1 Piece c/w Hang Card |
| V856241 | TT-9903-BULK | Slim line with locking carabiners | 22.5" | 10/Box, 50/Carton* |
| V856250 | TT-9904 | Slim line with loop & locking carabiner | 28" | 1 Piece c/w Hang Card |
| V856251 | TT-9904-BULK | Slim line with loop & locking carabiner | 28" | 10/Box, 50/Carton* |

^{*}Please note: All Tool Collar products are available individually, or in bulk 10 packs which are then master-packed five packs (50 pieces) per carton. Save by purchasing in both 10-packs and master packs of 50.









V890252 Tool Tether Display

Tool Tether Display

- Everything you need to get started with the new Tool Tethering System
- Designed for use on peg board or slot wall
- Modular design allows for additional merchandisers to be incorporated as needed
- $2' \times 2'$ (70cm x 70cm) footprint that takes up less space than conventional displays
- Sets up in minutes tool tethers, hardware, and graphics all included

| PRODUCT NO. | Description | Qty. |
|-------------|----------------------------------|------|
| V8561101 | TT-1000-1 Round Clamp 1/2" | 4 |
| V8561201 | TT-2000-1 Round Clamp 5/8" | 4 |
| V8561301 | TT-3000-1 Round Clamp 3/4" | 4 |
| V8561401 | TT-4000-1 Round Clamp 7/8" | 4 |
| V8561501 | TT-5000-1 Flat 15/16" x 5/16" | 4 |
| V8561601 | TT-6000-1 Flat 1 5/16" x 9/16" | 4 |
| V8561701 | TT-7000-1 Press 1/2" to 3/4" | 3 |
| V8561801 | TT-8000-1 Press 1 1/16" to 1 1/4 | 3 |
| V856210 | TT-9900 Wrist Lanyard | 3 |
| V856220 | TT-9901 Standard Lanyard | 3 |







313

STANDARDS AND REGULATIONS



| ΑN | ISI | St | an | ıda | ırd | s |
|----|-----|----|----|-----|-----|---|
| | | | | | | |

| 2359.11-2014 | .Safety Requirements for Full Body Harness |
|--------------|---|
| Z359.13-2013 | .Personal Energy Absorbers Energy Absorbing Lanyards |
| Z359.14-2012 | . Safety Requirements for Self Retracting Devices for Personal Fall Arrest Systems and Rescue Systems |
| Z359.15-2014 | . Safety Requirements for Single Anchor Lifelines and Fall Arrester for Personal Fall Arrest Systems |
| Z359.12-2009 | .Connecting Components for Personal Fall Arrest Systems |
| Z359.1-2017 | .Safety Requirements for Anchorage Connectors for Active Fall Protection Systems |

CSA Standards

| CSA Z259.1-05 (R2010) | Safety Belts and Saddles for Work Positioning and Travel Restraint |
|-----------------------|--|
| CSA Z259.2.2-17 | Self-Retracting Devices for Personal Fall-Arrest Systems |
| CSA Z259.2.3-16 | Descent Control Devices |
| CSA Z259.2.4-15 | Fall Arrester and Fixed Rigid Rails |
| CSA Z259.2.5-17 | Fall Arresters and Vertical Lifelines |
| CSA Z259.10-18 | Full Body Harness |
| CSA Z259.11-17 | Energy Absorbers and Lanyards |
| CSA Z259.12-16 | Connecting Components for Personal Fall Arrest Systems |
| CSA Z259.13-16 | Flexible Horizontal Lifelines |
| CSA Z259.14-12 | Fall Restrict Equipment for Wood Pole Climbing |
| CSA Z259.15-12 | Anchorage Connectors |
| CSA Z259.17-16 | Selection and Use of Active Fall-Protection Equipment and Systems |

OSHA REGULATIONS GOVERNING CONSTRUCTION (29 CFR PART 1926)

| | | protective equipment. |
|--|--|-----------------------|
| | | |
| | | |

| Subpart L covers Scaffolds. | . 1926.450-454 |
|--|----------------|
| Subpart M covers fall protection fully, including when and where fall protection systems are required and for what construction work activities. It also defines system component requirements. | |
| Scope, Application and Definitions. | . 1926.500 |
| Duty to Have Fall Protection | . 1926.501 |
| Fall Protection Systems Criteria and Practices | . 1926.502 |
| Training Requirements | . 1926.503 |
| Subpart X covers Ladders | . 1926.1053 |

 Safety Belts, Lifelines and Lanyards
 1926.104

 Safety Nets
 1926.105

OSHA REGULATIONS GOVERNING GENERAL INDUSTRY (29 CFR PART 1910)

| Subpart D mentions a few specific Fall Protection requirements relative to walking/working surfaces. |
|---|
| Fixed Ladders, Ladder Safety Devices |

| | , | | |
|-------------------------|---------------------------------|------|-----------------|
| Safety Requirements for | Scaffolding, Boatswain's Chairs | | . 1910.28(j)(4) |

Subpart F covers fall protection as it pertains to powered platforms, man lifts, and vehicle mounted work platforms.

| Support F covers fall protection as it pertains to powered platforms, man lifts, and venicle mounted work platforms. | | |
|---|---------|--|
| Maintenance | 1910.66 | |
| Personal Fall Arrest Systems | 1910.66 | |
| | | |

Subpart J covers general environmental controls in which confined spaces are addressed.

ANSI STANDARDS GOVERNING CONSTRUCTION AND DEMOLITION OPERATIONS

| Cafatu Daguirana anta far Daraar | and Fall Armant Crintanna Cribariatar | ns and Components | 72501 2007 |
|----------------------------------|---------------------------------------|-------------------|------------|
| Salety Reduitements for Fersor | iai raii Afresi Systems, Subsyster | ns and Components | |

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

11 West 42nd Street New York, NY 10036 www.ansi.org

surewerx.com/usa Table of Contents

| 37 96, 103, 171 | 430P | 5626U | 7704 |
|--------------------------------|-------------------------|-----------------------------|---|
| 54 PC | 437 96, 101, 171 | 5627U | 7704T |
| 82 B 101, 171 | 451P | 5628U | 9450-BW030BG308 |
| 82 BM 101 | 490P | 5629U | 9450-BW050BG308 |
| 87 Mountina | 577AU | 5670U 217 | 9450-BW075BG308 |
| Blades 48, 101, 171 | 597U | 5999AU 217, 229 | 9900-TROLLEY6 283 |
| 117A48 | 598U 208 | 5999PU | 9900-TROLLEY6A 283 |
| 117A Replacement | 695 NPR Winterliner 173 | 6672U 204 | 12978 174, 175 |
| · | 810 Series | 6673U 204 | 13821 |
| Headgear 37, 42, 43 | 812 Series | 6674U 204 | 13822 |
| 131BBAU206 | 813 Series 137, 138 | 6675U 204 | 14132 |
| 134BBAU 206 | 830 Series 137, 138 | 6690U212, 229 | 14200 |
| 134NAU | 832 Series 137, 138 | 6691U | 14201 |
| 135AU 206, 228 | 860P | 6692AU | 14202 49, 87, 105, 170, 171 |
| 136U | | | |
| 137 | 880 Series | 6693AU203 6730U203 | 14203 49, 87, 105, 170, 171 14214 87 |
| | | 6731U 203 | 14215 |
| 139PKU | 882 Series | | 14220 |
| 139U | 900 Series | 6790U | , . |
| | 930P | 6791U | 14225 49, 81, 105, 171 |
| 170-SB 96, 100, 110 | 951P | 6844U | 14230 |
| 182 B | 990P | 6845U | 1423380, 81 |
| 182-B | 1000-CONTNR307 | | 1423549, 80, 81, |
| 187-S Mounting Blades . 41, 48 | 1000-DC000 | 6854U | 105, 170, 171 |
| 225 Plus Winterliner 172 | 1003-DEVXXX | 6855U | 14238 49, 81, 105, 170, 171 |
| 280 | 1006-DEVXXX 307 | 6856U 210 | 14250 |
| 280 Series 15, 38, 45, 51, 104 | 1127 Filter Lens | 6882U 214 | 14255 |
| 282-B 96, 102, 171 | 4118110 | 6883U | 14258 |
| 290 Series 15, 38, 46, 51, 104 | 4178110 | | 14260 |
| 301 Series97, 110, 141 | 4199110 | 6888U | 105, 107, 108, 170 |
| 303 Series 97, 141 | 4400-BA1CKTS 288 | 6901AU | 1426249, 98, 99, |
| 305 TSL Winterliner 173 | 4456-KIT03S 289 | 6914AU | 105, 109, 170 |
| 311 Series | 5040BBU222 | 6916AU | 14350 |
| 312 Series | 5041BBU222 | 6921U | 14355 |
| 325 Ultra Winterliner 172 | 5208AU | 6922U | 14356 |
| 337 | 5209U | 6924AU | 14381100, 109 |
| 337SFU226, 228 | 5400AU221 | 6925AU | 14390 102, 171 |
| 338SFU | 5400HU221 | | 14391 |
| 370 Speed Dial 2, 3, 13, 15, | 5401AU | 6931U 206 6935AU | 14393 103, 171 |
| 21, 23, 25, 28, 30, 31, | 5404AU | 6936AU | 14407166 14409166 |
| 80, 81, 86, 87, 96, 98, | 5405AU221, 230 | 6937AU 206 | 14416166 |
| 99, 109, 160, 161, 164 | 5408AU221 | 6940U | 14418 |
| 380 Series | 5409AU | 6941U | 14420 |
| 93, 104, 141, 171 | | | |
| 382-B | 5496U | 6960U208 | 14423 |
| 386 Cap Adapter | 5497U | 6961U | 14425 |
| 390 Series | 5591U | 6990U 214, 229 6991U 214 | 14426 |
| 104, 141, 171 | | | 14429 161, 166, 167, 169 |
| 400 Series | 5598U | 6995U | 14434 166, 167 |
| 400 Ultra Winterliner 173 | | | 14445 |
| 411P | 5618U | 7702 | 14459 |
| 427 Filter Lens 54 | 5619U 219 | 7702T 226 | 14494 172 |

| 14495 172 | 1477361 | 14001 | 20202 |
|--------------------|---------------------|---|------------------------------|
| | | 1496148 | |
| 14496 | 1477461 | 1497240 | 20203 |
| 14497 | 1477561 | 1497341 | 20204 |
| 14499 172 | 14776 | 14975 | 20205 |
| 14501 | 1477762 | 1497641 | 20220 |
| 14502 | 14778 | 1497741 | 20221 |
| 14504 | 14779 | 1497841 | 20222 |
| 14505 103, 171 | 14780 | 1497940 | 20223 |
| 14506 | 14781 | 14982 | 20224 |
| | 1478261 | 14986 40 | 20225 |
| 1452842 | 1478361 | 1512140 | |
| 14529 | 14785 | 1513240 | 20232 |
| 1453137 1453242 | 14795 | 1513441 1596841, 48 | 20392 |
| | | , in the second | |
| 14534 | 14796 | 15973 | 20394 |
| 14556 | 14798 | 15975 | 20397 |
| 14559 | 14809 | 15977 | 20398 |
| 14560 | 14811 | 15978 | 20398 |
| 1456154 | 14812168 | 15984 | 20403 |
| 14562 54 | 14813168 | 16058 | 20422 |
| 14563 41, 43, 54 | 14814 | 16063 56 | 20508 41 |
| 14564 54 | 14815 | 16068 56 | 20600 |
| 14566 54 | 14816 | 16073 37, 40, 42, 43, 55 | 20620 |
| 1457054 | 14833 | 16078 41, 43, 55 | 20630 |
| 1457154 | 14834 | 16150159 | 20693 23. 27 |
| 1467959 | 14836 | 16250 159 | 20694 81 |
| 14680 59 | 14838 164 | 16622 | 20695 87, 99 |
| 1468159 | 14839 164 | 16642 41. 55 | 20696 28. 30. 31. 40. 41. 48 |
| 14682 59 | 14841164 | 16750 | 20697 |
| 14683 59 | 14842 164 | 16756172 | 20698 |
| 14684 59 | 14843 164 | 16760 173 | 20699 |
| 1473058 | 14936 164 | 16767173 | 20701 161 |
| 1473158 | 14937161, 164 | 16797 109, 159, 171 | 20702 161 |
| 1473258 | 14938 164 | 16799 109 | 20703 161 |
| 1473359 | 14939 48, 101, 171 | 16800 109 | 20718161 |
| 1473459 | 14940 100 | 17330 169 | 20738 161 |
| 1474259 | 14941 101, 171 | 18428 168 | 20771 154 |
| 1474559 | 14942 102, 171 | 18446 161, 166, 167 | 20772 154 |
| 1474658 | 14943 102, 171 | 19500 169 | 20773 152 |
| 1474858 | 14944 101, 171 | 19502 169 | 20774 148, 152, 171 |
| 1475263 | 14945 103, 171 | 20186 168 | 20775 152 |
| 1475363 | 14946 103, 168, 171 | 20187168 | 20776 109, 152, 155, 159 |
| 1475463 | 14947 101, 171 | 20188 168 | 20777 109, 152, 155, 159 |
| 1475663 | 14948 102, 171 | 20189 | 20778 109, 152, 155, 159 |
| 1476363 | 14949 101, 171 | 20191168 | 20800 162 |
| 1476463 | 14951 101 | 20192 168 | 20801 162 |
| 1476663 | 14952 102 | 20193 168 | 20802 162 |
| 1476763 | 14955 100, 141 | 20194 168 | 20803 162 |
| 1477161 | 14957 100, 141 | 20200 | 20804 162 |
| 1477261 | 14958 100 | 20201 | 20805 |
| | | | |

| 20820 162 | 28766 | 34068 41 | 36320 73 |
|---------------------|------------------------|--------------|----------------------------|
| 20821 162 | 28962 107 | 36144 71 | 36333 68 |
| 20822 162 | 28963 107 | 3614571 | 36335 68 |
| 20823 162 | 29051 100, 109 | 3614671 | 36336 68 |
| 20824 162 | 29052 | 3614771 | 36338 68 |
| 20825 162 | 29053 | 36148 71 | 36364 71 |
| 20830 162 | 29054 108 | 36149 71 | 36687 66 |
| 20831 | 29055 109 | 36150 71 | 3719271 |
| 20832 160, 162 | 29056 | 3615171 | 3719868 |
| 20900 159 | 29057 107 | 3615272 | 3745466 |
| 20901 159 | 29058 108 | 36153 72 | 37592 72 |
| 20903 159 | 29059 | 36154 72 | 37606 66, 68 |
| 20906 159 | 29060 | 36155 72 | 37607 66, 68 |
| 20907 159 | 29062 107 | 36156 72 | 37609 71 |
| 20920 158 | 29075 | 3615772 | 37700 66, 68 |
| 20921 158 | 29076 100, 108 | 36158 73 | 38423 49, 81, 105, 170 |
| 20923 158 | 29077 | 36159 71 | 38424 49, 87, 99, 105, 170 |
| 20926 158 | 29078 | 36160 71 | 3842549, 96, 101, |
| 20927 | 29079 | 3616171 | 105, 107, 108, 170 |
| 20930 159 | 29080 98, 108 | 36162 71 | 3842628, 30, 48, |
| 20931 159, 160, 162 | 29081 109 | 36163 71 | 49, 105, 170 |
| 20932 159 | 29082 | 36164 72 | 39476 49, 105, 170 |
| 20933 159, 171 | 29083 | 36165 73 | 39477 49, 96, 105, 170 |
| 20936 159 | 29084 | 36166 | 4158930 |
| 20937 159 | 29085 | 3616771 | 4159430 |
| 21000 134, 135 | 29086 | 3617171 | 4610130 |
| 21001134, 135 | 29087 98, 99, 107, 109 | 3617372 | 4611828 |
| 21002 134, 135 | 29088 | 3617472 | 4612830 |
| 22606 | 29089 | 36208 73 | 4612930 |
| 23286 | 29090 | 36277 66 | 46130 30 |
| 23440 | 29091 | 36278 66 | 4613130 |
| 23442 | 29092 100 | 36281 66, 68 | 46138 30 |
| 23475142 | 29096 107 | 36283 66, 68 | 46148 |
| 24523 40 | 29097 107 | 36287 68 | 46149 |
| 24528 42 | 29098 107 | 36289 66 | 4615131 |
| 24530 42 | 29099 107 | 36290 71 | 4615231 |
| 24550 41 | 29100 107 | 36291 73 | 46158 28 |
| 2455142 | 29101107 | 36292 66, 68 | 46159 28 |
| 24557 37 | 29102 109 | 36293 71 | 46163 28 |
| 24565 42 | 29103 107 | 36296 66, 68 | 46200 15, 17, 19 |
| 2473455 | 29104 107 | 36299 66, 68 | 46240 15, 27 |
| 2473741 | 29106 | 36302 72 | 46250 15, 23 |
| 25708 149 | 29107107, 168 | 36304 66 | 46410 53, 56 |
| 25709 149 | 29109 107 | 36305 71 | 4641151, 56 |
| 25973 109 | 30320 28 | 36306 73 | 46442 25, 27 |
| 26035 37 | 30321 28 | 36307 66, 68 | 46452 21, 23 |
| 26262 | 30590 | 36308 71 | 46540 27 |
| 28633 108 | 30706 98, 107 | 36312 66, 68 | 46550 23 |
| 28634 108 | 3120295 | 36313 73 | 46600 19 |
| 28764 107, 168 | 3218723, 27, 28, 30, | 36315 66, 68 | 46640 27 |
| 28765 106, 107, 168 | 31, 40, 41, 81, 87, 99 | 36318 72 | 46910 53 |
| | | | |

| 4691151 | AA-7 Windgard | CH-400V 157, 158, 159, 171 | 87, 88, 89, 90, 91, 92, 93, 94, |
|------------------|------------------------------|---------------------------------|---------------------------------|
| 4691427 | AA-8 Windgard172 | Charger 17, 48, 101, 102, | 95, 96, 97, 98, 99, 100, 101, |
| 46915 23 | AA-9 Windgard 172 | 103, 157, 167, 171 | 102, 103, 104, 105, 106, 107, |
| 46923 27 | ABC-DISPLAY 297 | Chin Cup 107, 108 | 108, 109, 110, 134, 141, |
| 46925 23 | AC-6600 282 | Compliance Series245, 256 | 155, 163, 164, 168, 170 |
| 46930 17, 19 | AC-6600-48 282 | Contractor Series 245, 252, | FBH-1000L 255 |
| 46991 27 | AC-6601 282 | 253, 254, 255 | FBH-7011G 247 |
| 46995 23 | AC-6604282 | CP-03015-1 295, 297 | FBH-10000A245, 254, 290 |
| 50000 | AC-9450-SBAR 280 | CP-03015-2 297 | FBH10000A1020X 253 |
| 50001 | AC-9452-DTA 281 | CP-04011-1297 | FBH-10000AHV 255 |
| 50002 | AC-9452-DTA-2 281 | CP-10010-1279 | FBH-10000B254 |
| 50003 | AC-9452-DTA-4 281 | CP-10010-2279 | FBH-10000E255 |
| 50004 | AC-9452-DTA-5 281 | CP-10011-1 279 | FBH-10000L 255, 300 |
| 50005 | AC-9452-DTA-6 281 | CP-10011-2279 | FBH-10002A245, 256, |
| 50006 | AC-9452-DTA-7 281 | CP-10011-3279 | 286, 287, 290 |
| 50007 | AC-9452-DTA-8 281 | CP-11010-1 280 | FBH-10020A 254, 290, 291 |
| 50008 114, 116 | AC-9900-TROLLEY7 280 | CP-11010-3280 | FBH10020A1020X253 |
| 50009 | Acetate | CP-12010-1281 | FBH-10020B254, 291 |
| 50010 114, 116 | 106, 108, 110 | CP-12010-2281 | FBH-10020E254 |
| 50011115 | ADF8, 9, 10, 11, 13, 15, | CP-14010258 | FBH-10022A256, 287 |
| 50012 | 17, 19, 21, 23, 25, 27, 28, | CP-15300-3294 | FBH-60110A 250 |
| 50013 115 | 30, 31, 32, 33, 34, 51, 55 | CP-23300-1 259 | FBH60110A10201249 |
| 50014 | Advantage 13, 97, 157, 171 | CP-41210-3294, 297 | FBH60110A10202249 |
| 50015 | Advantage Plus | CSK1-60293 | FBH60110A10203249 |
| 50016 | Series | CSK2293 | FBH60110A10204249 |
| 50017116 | Advantage Series 17, 31, 34, | CSK2-60293 | FBH60110A10205249 |
| 50018 | 97, 122, 124, 125, | CSK2-65293 | FBH-60110APL250 |
| 50025 117 | 154, 162, 163, 180 | CSK3-60292, 293 | FBH-60110B250 |
| 50026 | Arc Angel 28, 30 | D | FBH-60110L 251, 300 |
| 50027 | AS-21000-X 282 | Davit Arm System 296 | FBH-60120A251 |
| 50028 | AS-21110-X282 | Disposable Dust Mask 174 | FBH-60120B251 |
| 50029 | Auto Darkening Filter 9, 12, | DP4 82, 83, 84, 85, | FBH-70110A 247 |
| 50030 | 27, 51, 53, 54 | 104, 141, 171 | FBH-70110B 247 |
| 50031 | В | Drybrow 171 | FBH-70110G 244, 247 |
| 50040 | B5 | DSK3-60296 | FBH-121102B 257 |
| 50041 114, 116 | BAG-001290, 291, 297 | Dual Compact SRD-LE 266 | FBH-PAD |
| 50042 | BAG-004297 | Dual Tie-Back LE 264 | Fiber Shell |
| 64230 174, 175 | BAG-005294, 297 | F | Fibre-Metal |
| 64235 | BAG-006297 | F4XP 3, 49, 96, 98, 99, 105, | FK-005 290 |
| 64240 174, 175 | Black | 107, 108, 109, 110, 141, 170 | FK-006 291 |
| 64420 174, 175 | Black Strap 186, 187 | F10 Face Shield 98, 106, 107 | FK-007 291 |
| 64520 174, 175 | Blockhead 3, 17, 103, 161 | F20 Face Shield 98, 100, | FK-008 291 |
| 67210149 | | | FK-009 |
| | Blockhead FG 3, 157, | 106, 107 | |
| 67212148, 149 | 160, 171 | F30 Face Shield 98, 100, | FK-010290 |
| 67220 | Blockhead II 157, 171 | 106, 108 | FK-011 |
| 67221 150, 151 | C 457 460 474 | F40 Face Shield 98, 106, 108 | Flash-Tex Liners 173 |
| 79103 | C10 157, 168, 171 | F50 Face Shield 98, 106, 108 | G |
| 79108 125 | CableGrab | F60 Face Shield 106, 109 | GM200 |
| A | Carbon Fiber 41, 160 | F60 Wire Mesh 106, 109 | GM500 |
| A-5500SN | CAS4282, 287 | Face Shield 3, 17, 27, | GPL500135 |
| A-5500X 101, 171 | CH-300 157, 159, 171 | 49, 80, 81, 82, 83, 84, 85, 86, | GPL530135 |

surewerx.com/usa Table of Contents 317

| GPL550135 | Leather | R | S22448 136, 137 |
|---------------------------------|---------------------------------|-------------------------|------------------|
| Guest-Gard125 | Light Seal Gasket | R05 Disposable | S22450 |
| H | M | Dust Mask 174, 175 | S23400 |
| H10 Disposable | Mag Lens Holder 56 | R10 Respirator 174, 175 | S23401 |
| Earplugs 149 | Max Light | R20 Respirator 174, 175 | \$23403 148, 153 |
| H70 152, 154, 155, 159, 171 | Maxview 3, 49, 86, 87, 105, | R30 Respirator 174, 175 | \$23404 |
| H225 | 125, 141, 170, 171 | RA-100 | S23406 |
| Halo X 15, 30, 31, 41, 48, 170 | Merch. Torso | RAS4282.287 | S23407 |
| Hard Hat 3, 28, 30, 31, | MFS-320111, 141 | RB-9701 279 | \$23409 155, 171 |
| 40, 41, 48, 49, 80, 81, 83, 85, | Mid-Sole Model 186 | RB-9800 279, 286, 287 | S23410 148, 149 |
| 94, 96, 101, 102, 103, 104, | Model C 102, 171 | RB-9900 279 | S23411 |
| 105, 107, 108, 109, 110, 155, | Model H 171 | Rebel | S23412 |
| 157, 158, 159, 160, 162, 163, | Model K 96, 100, 110 | Respirators 174 | S23413 |
| 164, 166, 167, 170, 171, 173 | Model P 102, 171 | Res-Q-Kit 295 | S23414 |
| Heavy Metal 41 | MW-65 292, 294, 296 | Res-Q-Pole w/ | S23420 |
| HLX 13, 15, 28, 30, 31, 41, 48 | MW-65G 292, 293, 294 | Res-Q-Head295 | \$23421 150 |
| HLX-100 3, 41 | N | RFID-1 | S23422 150 |
| HP424 | N95 Particulate | RG-11005 277 | \$23430 |
| HP427 | Respirator 174, 175 | RG-11015 277 | S23431 151 |
| HP431 | N99 Particulate | RG-12142 286, 287 | S23469 |
| HPD425153 | Respirator 174, 175 | RK6286 | S23470 |
| HPS428 | NexGen 3, 12, 13, 31, 41 | RK7286, 287 | S23480 |
| H Series 48 | Nitro 48, 170 | s | \$23490 |
| HSL | Nomex | S16604 54 | S25000-1039 |
| 31, 40, 41, 48, 170 | 0 | \$16605 | S26100 |
| HSL-1 3, 15, 40, 48, 51, 53 | Odyssey II130, 131, | S16606 | S26200 |
| HSL-2 3, 15, 40, 48, 51, 53 | 132, 133, 139 | S16609 54 | S26400 |
| HSL-100 3, 41, 48 | Old Firebird124 | \$16610 54 | \$27000 |
| HSL Series Shadow 48 | OTG124, 125 | S16611 | S27001 |
| I | P | S16612 54 | S27005 |
| l ² 30 | P95 Particulate | \$16709 54 | S27006 |
| Insight 3, 12, 13, 30, 41 | Respirator 174, 175 | S16710 54 | S27051 |
| Intrinsic 186, 187, 188 | PeakPro 250, 251, 258 | S1671154 | 90, 91, 92, 93 |
| Iron Mask 39 | PeakPro Plus | S16712 54 | S27710 |
| IRUV 96, 106, 108, 135 | Series 244, 246, 247 | S18100 | \$27720 |
| K | PeakPro Series244, 248, | S18125 | \$2774032 |
| K1MID 186, 187 | 249, 250, 251 | S18150 | S28301 45 |
| K1MID-BLK186, 187 | PETG 96, 106, 107, 168 | S1817556 | S2831145 |
| K1MID-HP186, 187 | Polycarbonate54, 81, | S18200 | S28501 45 |
| K1MID-HP-BLK 186, 187 | 82, 84, 85, 86, 87, 88, 89, 90, | S18225 | S29301 46 |
| K1MID-INT 186, 187, 188 | 91, 92, 93, 94, 95, 96, 97, 99, | S18250 | S2931146 |
| K1MID-INT-HP 186, 187, 188 | 100, 106, 107, 108, 110, 114, | S19002 | S29341 46 |
| K1MID-INT-LP 186, 187, 188 | 118, 120, 122, 124, 126, 127, | S19004 | S29371 46 |
| K1MID-LP 186, 187 | 130, 134, 135, 136, 137 | S1945134 | S29411-08E38 |
| K1MID-LP-BLK 186, 187 | Polypropylene 49, 105 | S19452 | S29901 46 |
| K1MID-SLM 186, 187, 189 | Proban 173 | S19454 | S29911 46 |
| L | Professional Variable 41 | S21100 | S30100 96, 97 |
| LAN-1222-X 274 | Propionate 96, 106, 108 | S21300 | S30110 97 |
| LAN-1242-X274 | Q | S21301 | S30120 97 |
| LAN-3400-X 274 | Quad 500 3, 49, 80, 81, | S21301-1038 | S30310 |
| LAN-3402-X 274 | 105, 141, 170, 171 | S22185 143 | S31200 94, 95 |
| | | | |

| S31201 95 | S3600090 | S70704 126 | S76301 125 |
|------------------------|----------------------------|------------------|----------------------------|
| S31220 | \$36020 | \$70705 | \$76341 |
| S31222 | \$36040 | \$70705 | \$76361B 125 |
| S31223 | \$36050 | \$70711 | \$76371 |
| S31224 | \$37040 | \$70721 | \$76701 |
| \$32000 | \$37050 | \$71100 | \$76771 |
| S32000 | \$37599 | \$71100 | \$79100 |
| \$32001 | \$37600 | \$71101 | \$79301 |
| \$32010 82, 83, 84, 85 | \$37600 | \$71102 | \$79302 |
| S32010 | \$37606 | \$71200 | \$79371 |
| • • | \$37607 | \$71201 | \$79372 |
| \$32012 | \$37607 | | \$79901 |
| | \$37701 | \$71203 | \$79901 |
| S32032 | | \$71400 | |
| S32050 | S38110 | \$71401 | \$79905 |
| S32052 | S38140 | \$71402 | \$79906 |
| \$32100 | S38150 | , | \$80200 130, 131 |
| | \$38210 | S71911119 | S80201 130, 131 |
| S32150 | \$38230 | \$71912 | \$80202 130, 131 |
| S32151 | \$38240 | \$72000 | \$80203 130, 131 |
| S32152 | \$3825090 | \$72001 | S80210 130, 132, 139 |
| S32153 | \$38410 | \$72002 | S80211 130, 132 |
| | \$38440 | | \$80225 |
| S32161 | S38510 | \$72101 | \$80226 |
| S32161B | \$38540 | \$72102 | \$80231 130, 131 |
| S32162 | \$39000 | \$72300 120, 121 | \$80245 |
| S32162B | S39010 | \$72301 | \$80246 |
| S32163 | \$39020 | \$72302 | \$80251 |
| S32163B | \$39040 | \$72400 | |
| S32166B85 | \$39050 | | \$81000 |
| S32181 | S39100 | \$72402 | \$81010 |
| S32182 | S39120 | \$72905 | \$81210 |
| S32183 | \$39140 91, 92 | \$73401 | \$81210 |
| S32188 | \$39150 91, 92 | \$73401 | S81220 |
| S32200 | \$39200 | \$73421 | S81220X |
| S32210 | \$39210 | \$73471 | \$81310 |
| S32210 | \$39240 | \$73481 | \$81310 138 \$81320 138 |
| S32251 | \$39250 | \$73601 | \$81330 |
| S32252 | S61600 104, 171 | S73611 | \$82000 |
| S32261 | \$61601 96, 104, 171 | \$73621 | \$82500 |
| S32262 | S61602 104, 171 | S73631 | \$83000 |
| S32281 | S61610 95, 104, 171 | S73801 | S83010 |
| S32282 | \$61900 96, 104, 171 | \$73802 | \$83200 |
| S35000 | S61970 38, 46, 84, 85, 88, | \$74201 | \$83210 |
| \$35000 | 90, 93, 94, 95, 104, 171 | \$74201 | \$85210 138 \$85110 139 |
| \$35040 | \$69500 | \$74203 | \$85150 |
| \$35050 | \$70000 | \$74204 | \$85250 |
| S35100 | \$70000 | \$74204 | \$85350 |
| S35120 | \$70001 | \$74271 | \$85450 |
| S35140 | \$70002 | \$74701127 | \$85550 |
| S35150 | \$70701 | \$74751127 | \$85560B139 |
| 333130 | 0/0/03 | 014131 | 3033000139 |

| S88003 136 SA-7500-6U 273 Trauma Straps 251, 259 V86026 292, 293 S88010 136 SA-7600-6U 273 Trident Series 38 V86043 296 S8810 136 SA-84000-U 273, 291 Tri-1000-1 311, 312 V85632-XX 307 S88210 136 SA-86022-EU 273, 291 Tri-1000-1 311, 312 V85632-XX 307 S88210 136 SA-86522-EU 273 Tri-1000-1 311, 312 V254031T 226 S90306 144 Sate 2 Protection Tri-2000-1 311 V254031T 226 S90312 144, 15 System 109, 185, 197, 1 Tri-2000-1 311 V800517X 227, 294 S90321 145 Schring 125 Tri-2000-1 311 V805101X 258 S90322 146 Sebring 125 Tri-4000-1 311 V805601 282 S90322 146 Shadow Series 153, 03, 31 | \$88000 | SA-7405-6U 273 | 13, 15, 25, 27 | V85025 |
|---|---------------------|--|------------------------------|------------------|
| S88010 136 SA-7502-6U .273 Trident Series .38 V85043 .296 S88110 136 SA-44000-6U .273, 291 TrusoSgrit III 3, 12, 13, 28, 41 V85531-XX .307 S88200 136 SA-48022-6U .273, 291 Trut000-1 .311, 312 V8523-XX .307 S88210 136 SA-48522-6U .273 Trut000-10 .311 V254035T .226 S903015 145 System .109, 158, 159, 171 Tr-2000-10 .311 V254035T .226 S90321 .145 Sc-6 .3, 17, 48, 49, 101 Tr-2000-10 .311 V805101 .258 S90322 .144 .15 108, 157, 164, 170, 171 Tr-3000-1 .311, 312 V805601 .258 S90325 .145 Sentry III .17, 48, 101, 102, Tr-5000-1 .311 V805601X .288 S90326 .145 Sentry III .17, 48, 101, 102, Tr-5000-1 .311 V805602X .282 S90333 <th< td=""><td></td><td></td><td></td><td></td></th<> | | | | |
| 888110 136 SA-84000-6U. 273, 291 TrueSight II. 3, 12, 13, 28, 41 V85531-XX 307 588200 136 SA-84022-6U. 273, 291 Tri-1000-1. 311, 312 V85532-XX 307 588210 136 SA-85022-6U. 273 Tri-1000-1. 311, 312 V8532-XX 307 590306 144 Safe 2 Protection Tri-2000-1. 311, 312 V85015T. 226 590315 145 System. 109, 158, 159, 171 Tri-2000-1. 311, 312 V80051TX. 247, 294 590322 144, 145 102, 103, 105, 107, Tri-3000-1. 311, 312 V80510TX. 258 590325 145 Sebring. 125 Tri-4000-1. 311, 312 V805601_ 258 590325 145 Sentry III. 17, 48, 101, 102, Tri-5000-1. 311, 312 V805602_ 258 590326 146 Shadow Series. 15, 30, 31, Tri-6007-1. 311, 312 V81500X 274 590333 146 Single SRD LE. | | | • | |
| S88200 136 SA-84022-6U 273 291 TT-1000-1 311, 312 V85532-XX 307 S88210 136 SA-85522-6U 273 TT-1000-10 311 V25403TT 226 S90306 144 SG-6 3, 17, 48, 49, 101, 71 TT-2000-10 311 V800517X 247, 294 S90322 145 50, 20, 105, 106, 107, 77, 700-10 311 V800517X 247, 294 S90322 144, 145 108, 157, 164, 170, 171 TT-4000-1 311, 312 V805601 258 S90322 145 Sebring 125 TT-4000-1 311, 312 V805601 258 S90322 145 Sebring 125 TT-4000-1 311 V805601 258 S90326 145 Sentry III 17, 48, 101, 102, 2 TT-5000-1 311 V805602 258 S90323 146 Shadow Series 15, 30, 31 TT-5000-1 311 V81500X 274 S90333 146 Sigle SRD LE 267 TT-7 | | | | |
| S88210 136 SA-85522-6U 273 TT-1000-10 311 V25403TT 226 S90306 144 Safe 2 Protection TT-2000-1 311 V25403TT 226 S90315 145 System 109, 158, 159, 171 TT-2000-10 311 V8051TX 247, 294 S90320 144, 145 SC-6 .3, 17, 48, 49, 101, 170 TT-3000-10 311 V805101X 258 S90321 145 102, 103, 105, 107, 171 TT-400-1 311, 312 V805601X 258 S90322 1445 Sebring 125 TT-4000-1 311 V805601X 258 S90325 145 Sebring 125 TT-4000-1 311 V805601X 258 S90326 145 Shadow Series 15, 30, 31 TT-5000-1 311 V805601X 258 S90329 146 Shadow Series 15, 30, 31 TT-5000-1 311 V815100X 274 S90331 146 Singel SRD LE 267 TT-7000-1 311 | | • | | |
| S90306 .144 Safe 2 Protection TT-2000-1 311, 312 V254035T .226 S90315 .145 System 109, 158, 159, 171 TT-2000-10 .311 V800517X .247, 294 S90321 .144 SC-6 .3, 17, 48, 49, 101 TT-3000-10 .311 V805101 .258 S90322 .144, 145 108, 157, 164, 170, 171 TT-4000-1 .311, 312 V805601 .258 S90322 .1445 Sebring .125 TT-4000-1 .311, 312 V805601X .258 S90322 .145 Sebring .125 TT-4000-1 .311, 312 V805601X .258 S90328 .145 Sentry III .7, 48, 101, 102 TT-5000-1 .311, 312 V805602X .258 S90329 .146 Shadow Series .15, 30, 31 TT-6000-1 .311, 312 V815120X .274 S90331 .146 Single SRD LE .267 TT-7000-1 .311, 312 V820360X .282 S90335 .145 SRL-54754- | | • | , i | |
| S90315 145 System 109, 158, 159, 171 TT-2000-10 311 V800517X 247, 294 S90320 144, 145 SC-6 3, 17, 48, 49, 101, TT-3000-1 311, 312 V805101X 258 S90322 144, 145 108, 157, 164, 170, 171 TT-4000-1 311 V805601X 258 S90324 145 Sebring 125 TT-4000-1 311 V805601X 258 S90325 145 Sentry III 17, 48, 101, 102, TT-5000-1 311 V805601X 258 S90326 145 Sentry III 17, 48, 101, 102, TT-5000-1 311 V805602X 258 S90329 146 Shadow Series 15, 30, 31, TT-6000-1 311 V815100X 274 S90331 146 Single SRD LE 267 TT-7000-1 311 V820310X 282 S90333 146 Single SRD LE 267 TT-7000-1 311 V820360X 282 S90336 145 SRL-463-4-9TB <th< td=""><td></td><td></td><td></td><td></td></th<> | | | | |
| 890320 144, 145 SC-6 3, 17, 48, 49, 101, TT-3000-1 311, 312 V805101 258 890321 145 102, 103, 105, 107, TT-3000-10 311 V805101X 258 890322 144, 145 Sebring 125 TT-4000-10 311 V805601 258 890324 145 Sebring 125 TT-4000-10 311 V805601 258 890325 145 Sentry III 17, 48, 101, 102 TT-5000-10 311, 312 V805602 258 890326 145 Shadow Series 15, 30, 31 TT-5000-10 311, 312 V805602 258 890330 146 Shadow Series 15, 30, 31 TT-6000-1 311, 312 V815100X 224 890331 146 Smartweld 51, 104 TT-7000-1 311 V815120X 224 890333 146 Smet-54T54-9TB 265 TT-8000-1 311 V820350X 282 890333 146 SRL-54T54-9TB 265 | | | , | |
| S90321 145 102,103,105,107, 17,107, 17T-3000-10 311 V805101X 258 S90322 144, 145 Sebring 125 TT-4000-10 311, 312 V805601 258 S90324 145 Sebring 125 TT-4000-10 311 V805601X 258 S90326 145 Sentry III 17, 48, 101, 102, 175-5000-1 311, 312 V805602X 258 S90326 146 Shadow Series 15, 30, 31, 17, 166, 171 TT-5000-10 311, 312 V815100X 274 S90330 146 Single SRD LE 267 TT-7000-1 311, 312 V820310X 282 S90331 146 Smartweld 51, 104 TT-7000-10 311 V820350X 282 S90333 146 Solera II. 53 TT-8000-10 311 V820350X 282 287 S90335 145 SRL-45764-9TB 265 TT-8000-1 311 V820350X 282 287 S90336 145 SRL-45302-16 269 | | | | |
| S90322 144,145 108,157,164,170,171 TT-4000-1 311,312 V805601 258 S90324 145 Sebring 125 TT-4000-10 311 V8056012 258 S90325 145 Sentry III 17,48,101,102 TT-5000-10 311 V805602X 258 S90326 146 Shadow Series 15,30,31, TT-5000-10 311 V805602X 258 S90330 146 Shadow Series 15,30,31, TT-6000-10 311 V815100X 274 S90331 146 Single SRD LE 267 TT-7000-1 311 V820310X 282 S90332 146 Smartweld 51,104 TT-7000-1 311 V820300X 282 S90333 146 SRL-54T54-9TB 265 TT-8000-1 311 V820800X 282 S90336 145 SRL-54T54-9TB 265 TT-8000-1 311 V820800X 282 S90479 141 SRL-540302-1 269 TT-9900 | | | | = |
| S90324 145 Sebring 125 TT-4000-10 311 V805601X 258 S90325 145 Sentry III 17, 48, 101, 102, 102, 17-5000-1 311, 312 V8056022 258 S90326 145 Shadow Series 15, 30, 31, 17-1600-1 311, 312 V815100X 274 S90330 146 Shadow Series 15, 30, 31, 17-16000-1 311, 312 V815100X 274 S90331 146 Single SRD LE 267 TT-7000-1 311, 312 V820310X 282 S90332 146 Smrtweld 51, 104 TT-7000-1 311, 312 V820350X 282 287 S90335 145 SRL-4514-9TB 265 TT-8000-1 311, 312 V820960X 282 280 390335 145 SRL-40302-12 269 TT-9900 311, 312 V820960X 282 280 390479 141 SRL-40302-12 269 TT-9901 311, 312 V820950X 282 293 390486 141 SRL-53302-10LE 266 | | | | |
| S90325 145 Sentry III 17, 48, 101, 102, 103, 157, 166, 171 TT-5000-1 311, 312 V805602 258 S90326 146 Shadow Series 15, 30, 31, 17-600-1 311, 312 V805602X 258 S90330 146 Shadow Series 15, 30, 31, 17-6000-1 311, 312 V815100X 274 S90331 146 Single SRD LE 267 TT-7000-1 311, 312 V820310X 282 S90332 146 Smartweld 51, 104 TT-7000-10 311 V820300X 282 S90333 146 SRL-54754-9TB 265 TT-8000-10 311 V820800X 282 S90335 145 SRL-54754-9TB 265 TT-8000-10 311 V820800X 282 S90479 141 SRL-40302-18 269 TT-9900-10 311 V820950X 282 S90489 141 SRL-5302-20LE 266 TT-9901-1 311, 312 V82552X 253 S90488 141 SRL-5302-10LE 267 | <i>'</i> | | · | _ |
| S90326 145 103, 157, 166, 171 TT-5000-10 311 V805602X 258 S90329 146 Shadow Series 15, 30, 31, 17-6000-1 311, 312 V815100X 274 S90330 146 40, 41, 48 TT-6000-1 311, 312 V820310X 274 S90331 146 Single SRD LE 267 TT-7000-1 311, 312 V820310X 282 S90332 146 Smartweld 51, 104 TT-7000-10 311 V820350X 282 287 S90333 146 Solera II 53 TT-8000-1 311 V820800X 282 289 282 380336 145 SRL-4574-9TB 265 TT-8000-1 311 V820800X 282 282 380336 145 SRL-40302-18 269 TT-900-10 311 V820800X 282 289 380449 141 SRL-40302-18 269 TT-9901-10 311 V820950X 282 289 380449 141 SRL-53302-10LE 266 TT-9901-10 | | , and the second | | |
| S90329 146 Shadow Series 15, 30, 31, 40, 41, 48 TT-6000-10 | | | , i | _ |
| S90330 146 40, 41, 48 TT-6000-10 311 V815120X 274 S90331 146 Single SRD LE 267 TT-7000-1 311, 312 V820310X 282 S90332 146 Smartweld 51, 104 TT-7000-10 311, 312 V82030XX 282 287 S90335 145 SRL-54754-9TB 265 TT-8000-1 311 V820860X 282 S90336 145 SRL-40302-12 269 TT-9900 311, 312 V820960X 282 S90479 141 SRL-40302-12 269 TT-9901 311 V820950X 282 S90482 141 SRL-50502-6LE 266 TT-9901-10 311 V825522X 253 S90486 141 SRL-53302-10LE 267 TT-9902 311 V835522X 253 S90496 141 SRL-53302-20LE 268 TT-9902-311 V830103 277 S90496 141 SRL-53302-40LE 268 TT-9904-311 V845522X | | | | |
| S90331 146 Single SRD LE 267 TT-7000-1 311, 312 V820310X 282 S90332 146 Smartweld 51, 104 TT-7000-10 311 V820350X 282, 287 S90333 146 Solera II. 53 TT-8000-1 311, 312 V820800X 282 S90335 145 SRL-54754-9TB 265 TT-8000-10 311 V820960X 282 S90336 145 SRL-40302-18 269 TT-9900 311, 312 V820910X 282 S90479 141 SRL-50502-6LE 266 TT-9901 311, 312 V820950X 282 S90482 141 SRL-50602-6LE 266 TT-9901 311, 312 V825521X 252, 253 S90484 141 SRL-5302-10LE 267 TT-9902 311 V825522X 253 S90498 141 SRL-53302-20LE 268 TT-9902-BULK 311 V830113 277 S90499 141 SRL-53302-30LE 268 <th< td=""><td></td><td></td><td></td><td></td></th<> | | | | |
| S90332 146 Smartweld 51, 104 TT-700-10 311 V820350X 282, 287 S90333 146 Solera II. .53 TT-8000-1 311, 312 V820800X .282 S90335 145 SRL-4478-97B .265 TT-8000-10 .311 V820860X .282 S90336 145 SRL-40302-12 .269 TT-9900 .311, 312 V820910X .282 S90479 .141 SRL-5602-6LE .266 TT-9901-10 .311 V820552X .253 S90484 .141 SRL-50602-6LE .266 TT-9901-10 .311 V825522X .253 S90486 .141 SRL-53302-10LE .267 TT-9902 .311 V830103 .277 S90498 .141 SRL-53302-20LE .268 TT-9902 .311 V830103 .277 S90496 .141 SRL-53302-40LE .268 TT-9904 .311 V855522X .253 S96110 .178, 179 SRL-53302-12D .269 | | ,, | | |
| S90333 146 Solera II 53 TT-8000-1 311, 312 V820800X 282 S90335 145 SRL-54754-9TB 265 TT-8000-10 311 V820860X 282 S90336 145 SRL-40302-12 269 TT-9900 311, 312 V820910X 282 S90482 141 SRL-50502-6LE 266 TT-9901-10 311 V820950X 282 S90484 141 SRL-50602-6LE 266 TT-9901-10 311 V825522X 253 S90486 141 SRL-53302-10LE 267 TT-9902 311 V830103 277 S90488 141 SRL-53302-20LE 268 TT-9902-BULK 311 V830103 277 S90494 140, 141 SRL-53302-30LE 268 TT-9903 311 V85552TO09TB 265 S90496 141 SRL-53302-10L 268 TT-9904 311 V855130 294 S96110-7 180 SRL-53302-170 269 Ulriversal <td></td> <td></td> <td>, ,</td> <td></td> | | | , , | |
| S90335 145 SRL-54T54-9TB 265 TT-8000-10 311 V820860X 282 S90336 145 SRL-40302-12 269 TT-9900 311, 312 V820910X 282 S90479 141 SRL-50502-6LE 266 TT-9901 311 V820950X 282 S90482 141 SRL-50602-6LE 266 TT-9901 311, 312 V825521X 252, 253 S90486 141 SRL-53002-10LE 267 TT-9902 311 V825522X 253 S90486 141 SRL-53302-20LE 268 TT-9902 311 V830103 277 S90494 140, 141 SRL-53302-30LE 268 TT-9903 311 V845552T009TB 265 S90495 141 SRL-53302-40LE 268 TT-9904 311 V855130 294 S96110 178, 179 SRL-53302-120 269 U V855383 307 S96110-6 180 SRL-53302-140 269 Ultra Flex III 178, | | , | | · |
| S90336 145 SRL-40302-12. 269 TT-9900 311, 312 V820910X 282 S90479 141 SRL-40302-18. 269 TT-9901-10. 311 V820950X 282 S90482 141 SRL-50502-6LE 266 TT-9901. 311, 312 V825521X 252, 253 S90486 141 SRL-5302-10LE 267 TT-9902 311 V825522X 253 S90488 141 SRL-53302-20LE 268 TT-9902-BULK 311 V830103 277 S90494 140, 141 SRL-53302-30LE 268 TT-9902-BULK 311 V845552T009TB 266 S90495 141 SRL-53302-40LE 268 TT-9904-bulk 311 V855121 295 S90496 141 SRL-53302-120 269 U V855383 307 S96110-7 180 SRL-53302-170 269 Ultra Flex III 178, 179, 180 V855385 307 S96111-7 180 SRL-53303-140 269 Univers | | | , i | |
| S90479 141 SRL-40302-18 269 TT-9901-10 311 V820950X 282 S90482 141 SRL-50502-6LE 266 TT-9901 311, 312 V825521X 252, 253 S90484 141 SRL-5302-10LE 266 TT-9901-10 311 V825522X 253 S90486 141 SRL-53302-10LE 267 TT-9902 311 V830103 277 S90488 141 SRL-53302-20LE 268 TT-9902-BULK 311 V830103 277 S90494 140, 141 SRL-53302-30LE 268 TT-9903 311 V845552T009TB 265 S90495 141 SRL-53302-40LE 268 TT-9904 311 V855121 295 S96110 178, 179 SRL-53302-120 269 Ultra Flex III 311 V855130 294 S96110-7 180 SRL-53302-120 269 Ultra Flex III 178, 179, 180 V855385 307 S96112 179 SRL-53303-96 270, 29 | | | | |
| S90482 141 SRL-50502-6LE 266 TT-9901 311 312 V825521X 252 253 S90484 141 SRL-50602-6LE 266 TT-9901-10 311 V825522X 253 S90486 141 SRL-53302-10LE 267 TT-9902 311 V830103 277 S90488 141 SRL-53302-20LE 268 TT-9902-BULK 311 V830113 277 S90494 140, 141 SRL-53302-30LE 268 TT-9903 311 V845552T009TB 265 S90495 141 SRL-53302-40LE 268 TT-9904 311 V855121 295 S90496 141 SRL-53302-10L 269 U V855383 307 S96110-0 178, 179 SRL-53302-140 269 Ultra Flex III 178, 179, 180 V855385 307 S96110-7 180 SRL-53302-170 269 Universal 81, 83, 84, 85, 87 V856210 311, 312 S96111 179 SRL-53303-36 | | | | |
| S90484 141 SRL-50602-6LE 266 TT-9901-10 311 V825522X 253 S90486 141 SRL-53302-10LE 267 TT-9902 311 V830103 277 S90488 141 SRL-53302-20LE 268 TT-9902-BULK 311 V830113 277 S90494 140, 141 SRL-53302-30LE 268 TT-9903 311 V845552T009TB 265 S90495 141 SRL-53302-40LE 268 TT-9904 311 V855121 295 S90496 141 SRL-53302-10L 269 U V855383 307 S96110 178, 179 SRL-53302-140 269 Ultra Flex III 178, 179, 180 V855383 307 S96110-7 180 SRL-53302-170 269 Universal 81, 83, 84, 85, 87 V856210 311, 312 S96111 179 SRL-53303-96 270, 292 99, 101, 102, 103, 104 V856220 311, 312 S96112 179 SRL-53303-96 270 106, 107, | S90482 141 | | | |
| S90486 141 SRL-53302-10LE 267 TT-9902 311 V830103 277 S90488 141 SRL-53302-20LE 268 TT-9902-BULK 311 V830113 277 S90494 140, 141 SRL-53302-30LE 268 TT-9903 311 V845552T009TB 265 S90495 141 SRL-53302-40LE 268 TT-9904 311 V855121 295 S90496 141 SRL-53302-120 269 U V855383 307 S96110 178, 179 SRL-53302-120 269 Ultra Flex III 178, 179, 180 V855383 307 S96110-7 180 SRL-53302-170 269 Ultra Flex III 178, 179, 180 V855385 307 S96111 179 SRL-53303-170 269 Universal 81, 83, 84, 85, 87, 86210 V856210 311, 312 S96112 179 SRL-53303-96 270, 292 99, 101, 102, 103, 104, 86220 V856221 311 S96211 179 SRL-53303-140 270 <td></td> <td></td> <td>·</td> <td>,</td> | | | · | , |
| S90488 141 SRL-53302-20LE 268 TT-9902-BULK 311 V830113 277 S90494 140, 141 SRL-53302-30LE 268 TT-9903 311 V845552T009TB 265 S90495 141 SRL-53302-40LE 268 TT-9904 311 V855121 295 S90496 141 SRL-53302-120 269 U V855130 294 S96110 178, 179 SRL-53302-120 269 Ultra Flex III 178, 179, 180 V855383 307 S96110-7 180 SRL-53302-170 269 Universal .81, 83, 84, 85, 87, V856210 311, 312 S96111 179 SRL-53303-293 294 88, 90, 92, 94, 95, 96, V856210 311, 312 S96112 179 SRL-53303-96 270, 292 99, 101, 102, 103, 104, V856220 311, 312 S96113 179 SRL-53303-BRKT 292, 294 173, 175, 242, 249, 250, V856221 311 S96211 179 SRL-53402-10LE 267 251, 25 | | | | |
| S90495 141 SRL-53302-40LE 268 TT-9904 311 V855121 295 S90496 141 SRL-53302-60LE 268 TT-9904-bulk 311 V855130 294 S96110 178, 179 SRL-53302-120 269 U V855383 307 S96110-6 180 SRL-53302-140 269 Ultra Flex III 178, 179, 180 V855385 307 S96110-7 180 SRL-53302-170 269 Universal 81, 83, 84, 85, 87, 87 V856210 311, 312 S96111 179 SRL-53303 293, 294 88, 90, 92, 94, 95, 96, 86, 86211 311, 312 S96112 179 SRL-53303-060 270, 292 99, 101, 102, 103, 104, 86220 V856220 311, 312 S96113 179 SRL-53303-96 270 106, 107, 108, 109, 110, 86221 311 S96211 179 SRL-53303-140 270 141, 149, 150, 168, 171, 866221 V856220 311 S96310 180 SRL-53402-10LE 267 251, 253, 254, 255, 288, 289 <td< td=""><td>\$90488 141</td><td></td><td>TT-9902-BULK 311</td><td>V830113 277</td></td<> | \$90488 141 | | TT-9902-BULK 311 | V830113 277 |
| S90495 141 SRL-53302-40LE 268 TT-9904 311 V855121 295 S90496 141 SRL-53302-60LE 268 TT-9904-bulk 311 V855130 294 S96110 178, 179 SRL-53302-120 269 U V855383 307 S96110-6 180 SRL-53302-140 269 Ultra Flex III 178, 179, 180 V855385 307 S96110-7 180 SRL-53302-170 269 Universal 81, 83, 84, 85, 87, 87 V856210 311, 312 S96111 179 SRL-53303 293, 294 88, 90, 92, 94, 95, 96, 86, 86211 311, 312 S96112 179 SRL-53303-060 270, 292 99, 101, 102, 103, 104, 86220 V856220 311, 312 S96113 179 SRL-53303-96 270 106, 107, 108, 109, 110, 86221 311 S96211 179 SRL-53303-140 270 141, 149, 150, 168, 171, 866221 V856220 311 S96310 180 SRL-53402-10LE 267 251, 253, 254, 255, 288, 289 <td< td=""><td>\$90494 140. 141</td><td>SRL-53302-30LE 268</td><td>TT-9903 311</td><td>V845552T009TB265</td></td<> | \$90494 140. 141 | SRL-53302-30LE 268 | TT-9903 311 | V845552T009TB265 |
| S96110 178, 179 SRL-53302-120 269 U V855383 307 S96110-6 180 SRL-53302-140 269 Ultra Flex III 178, 179, 180 V855385 307 S96110-7 180 SRL-53302-170 269 Universal 81, 83, 84, 85, 87 V856210 311, 312 S96111 179 SRL-53303 293, 294 88, 90, 92, 94, 95, 96 V856211 311 S96112 179 SRL-53303-060 270, 292 99, 101, 102, 103, 104 V856220 311, 312 S96113 179 SRL-53303-96 270 106, 107, 108, 109, 110 V856221 311 S96114 179 SRL-53303-BRKT 292, 294 173, 175, 242, 249, 250 V856230 311 S96211 179 SRL-53402-10LE 267 251, 253, 254, 255, 288, 289 V856240 311 S96310 180 SRL-54854-7-5LE 266 V V856241 311 S96350 180 SRL-54954-9TB 265 V8059 258 V856250 | · · | | | V855121 295 |
| S96110 178, 179 SRL-53302-120 269 U V855383 307 S96110-6 180 SRL-53302-140 269 Ultra Flex III 178, 179, 180 V855385 307 S96110-7 180 SRL-53302-170 269 Universal 81, 83, 84, 85, 87 V856210 311, 312 S96111 179 SRL-53303 293, 294 88, 90, 92, 94, 95, 96 V856211 311 S96112 179 SRL-53303-060 270, 292 99, 101, 102, 103, 104 V856220 311, 312 S96113 179 SRL-53303-96 270 106, 107, 108, 109, 110 V856221 311 S96114 179 SRL-53303-BRKT 292, 294 173, 175, 242, 249, 250 V856230 311 S96211 179 SRL-53402-10LE 267 251, 253, 254, 255, 288, 289 V856240 311 S96310 180 SRL-54854-7-5LE 266 V V856241 311 S96350 180 SRL-54954-9TB 265 V8059 258 V856250 | S90496 141 | | TT-9904-bulk 311 | V855130 294 |
| S96110-7. 180 SRL-53302-170. 269 Universal. | S96110 178, 179 | SRL-53302-120269 | U | V855383 307 |
| S96111. 179 SRL-53303 293, 294 88, 90, 92, 94, 95, 96, V856211 311 S96112 179 SRL-53303-060 270, 292 99, 101, 102, 103, 104, V856220 311, 312 S96113 179 SRL-53303-96 270 270 106, 107, 108, 109, 110, V856221 311 S96114 179 SRL-53303-140 270 270 270 141, 149, 150, 168, 171, V856230 311 S96211 179 SRL-53303-BRKT 292, 294 294 249, 250, 251, 253, 254, 255, 288, 289 288, 289 286 V856231 311 S96310 180 SRL-53402-10LE 267 266 267 251, 253, 254, 255, 288, 289 V856240 311 V856241 311 S96350 180 SRL-54954-9TB 265 265 V8059 258 V856250 311 V866250 311 S96410 181 SRL-65105-6LE 267, 290 V81540X 274 V860001 297 S96412 181 T V81540X 274 V860004 297 | S96110-6180 | SRL-53302-140269 | Ultra Flex III 178, 179, 180 | V855385 307 |
| S96112 179 SRL-53303-060 270, 292 99, 101, 102, 103, 104, V856220 311, 312 S96113 179 SRL-53303-96 270 106, 107, 108, 109, 110, V856221 311 S96114 179 SRL-53303-140 270 141, 149, 150, 168, 171, V856230 311 S96211 179 SRL-53303-BRKT 292, 294 173, 175, 242, 249, 250, V856231 311 S96310 180 SRL-53402-10LE 267 251, 253, 254, 255, 288, 289 V856240 311 S96311 180 SRL-54854-7-5LE 266 V V856241 311 S96350 180 SRL-54954-9TB 265 V8059 258 V856250 311 S96410 181 SRL-65105-6LE 267, 290 V8460 292, 294 V860001 297 S96412 181 T V81540X 274 V860004 297 | S96110-7180 | SRL-53302-170269 | Universal81, 83, 84, 85, 87, | V856210 311, 312 |
| S96113 179 SRL-53303-96 270 106, 107, 108, 109, 110, V856221 311 S96114 179 SRL-53303-140. 270 141, 149, 150, 168, 171, V856230 311 S96211 179 SRL-53303-BRKT 292, 294 173, 175, 242, 249, 250, V856231 311 S96310 180 SRL-53402-10LE 267 251, 253, 254, 255, 288, 289 V856240 311 S96311 180 SRL-54854-7-5LE 266 V V856241 311 S96350 180 SRL-54954-9TB 265 V8059 258 V856250 311 S96410 181 SRL-65105-6LE 267, 290 V8460 292, 294 V856251 311 S96411 181 Stars & Scars 28, 30 V81540X 274 V860001 297 S96412 181 T V81542X 274 V860004 297 | S96111179 | SRL-53303 293, 294 | 88, 90, 92, 94, 95, 96, | V856211 311 |
| S96114 179 SRL-53303-140. 270 141, 149, 150, 168, 171, V856230 311 S96211 179 SRL-53303-BRKT 292, 294 173, 175, 242, 249, 250, V856231 311 S96310 180 SRL-53402-10LE 267 251, 253, 254, 255, 288, 289 V856240 311 S96311 180 SRL-54854-7-5LE 266 V V856241 311 S96350 180 SRL-54954-9TB 265 V8059 258 V856250 311 S96410 181 SRL-65105-6LE 267, 290 V8460 292, 294 V856251 311 S96411 181 Stars & Scars 28, 30 V81540X 274 V860001 297 S96412 181 T V81542X 274 V860004 297 | S96112 179 | SRL-53303-060 270, 292 | 99, 101, 102, 103, 104, | V856220 311, 312 |
| S96211 179 SRL-53303-BRKT 292, 294 173, 175, 242, 249, 250, V856231 311 S96310 180 SRL-53402-10LE 267 251, 253, 254, 255, 288, 289 V856240 311 S96311 180 SRL-54854-7-5LE 266 V V856241 311 S96350 180 SRL-54954-9TB 265 V8059 258 V856250 311 S96410 181 SRL-65105-6LE 267, 290 V8460 292, 294 V856251 311 S96411 181 Stars & Scars 28, 30 V81540X 274 V860001 297 S96412 181 T V81542X 274 V860004 297 | S96113 179 | SRL-53303-96 270 | 106, 107, 108, 109, 110, | V856221 311 |
| S96310 180 SRL-53402-10LE 267 251, 253, 254, 255, 288, 289 V856240 311 S96311 180 SRL-54854-7-5LE 266 V V856241 311 S96350 180 SRL-54954-9TB 265 V8059 258 V856250 311 S96410 181 SRL-65105-6LE 267, 290 V8460 292, 294 V856251 311 S96411 181 Stars & Scars 28, 30 V81540X 274 V860001 297 S96412 181 T V81542X 274 V860004 297 | S96114 179 | SRL-53303-140270 | 141, 149, 150, 168, 171, | V856230 311 |
| S96311 180 SRL-54854-7-5LE 266 V V856241 311 S96350 180 SRL-54954-9TB 265 V8059 258 V856250 311 S96410 181 SRL-65105-6LE 267, 290 V8460 292, 294 V856251 311 S96411 181 Stars & Scars 28, 30 V81540X 274 V860001 297 S96412 181 T V81542X 274 V860004 297 | S96211 179 | SRL-53303-BRKT 292, 294 | 173, 175, 242, 249, 250, | V856231 311 |
| S96350 180 SRL-54954-9TB 265 V8059 258 V856250 311 S96410 181 SRL-65105-6LE 267, 290 V8460 292, 294 V856251 311 S96411 181 Stars & Scars 28, 30 V81540X 274 V860001 297 S96412 181 T V81542X 274 V860004 297 | S96310 180 | SRL-53402-10LE267 | 251, 253, 254, 255, 288, 289 | V856240 |
| S96410 181 SRL-65105-6LE 267, 290 V8460 292, 294 V856251 311 S96411 181 Stars & Scars 28, 30 V81540X 274 V860001 297 S96412 181 T V81542X 274 V860004 297 | S96311 180 | SRL-54854-7-5LE266 | V | V856241 311 |
| \$96411 181 \$Stars & Scars 28, 30 \$V81540X 274 \$V860001 297 \$96412 181 \$T\$ \$V81542X 274 \$V860004 297 | S96350 180 | SRL-54954-9TB 265 | V8059 258 | V856250 311 |
| S96412 | S96410 181 | SRL-65105-6LE 267, 290 | V8460 292, 294 | V856251 311 |
| | S96411 181 | Stars & Scars 28, 30 | V81540X 274 | V860001 297 |
| | S96412 181 | Т | V81542X 274 | V860004 297 |
| S96413 | S96413 181 | Tie-Back SRL-LE 265 | V82235 283 | V860005 294, 297 |
| SA-1700-6 | SA-1700-6257 | | V82236 283 | V860006 297 |
| SA-1702-6 | SA-1702-6257 | Tonedown 200 154 | V83010 277 | V860120295, 297 |
| SA-7400-4U | SA-7400-4U 273 | Tool Tether Display 312 | V84013XXX276 | V860121297 |
| SA-7400-6AU | SA-7400-6AU 273 | TR-100 292, 293, 294, 297 | V84014XXX276 | V860130 297 |
| SA-7400-6U273, 290 Translight+ 8, 13, 15, 23 V84084XXX | SA-7400-6U 273, 290 | Translight+ 8, 13, 15, 23 | V84084XXX276 | |
| SA-7402-6AU | | , , , | V85011292, 294 | V860151 274 |
| SA-7402-6U273, 291 Translight 455 Flip3, 8, 12, V85024293 V860153294, 297 | SA-7402-6U273, 291 | Translight 455 Flip3, 8, 12, | V85024 293 | V860153 294, 297 |

| V860301 258 | V1025150U 210 | V2540310 226 | V8006210 251 |
|-------------------|--------------------|------------------------|-------------------|
| V860303 259 | V1025160U 210 | V2540350 226 | V8008000 255 |
| V860308 258 | V1025250U 210 | V2570450U226 | V8009010 257 |
| V860402 297 | V1025260U 210 | V2570470U 226, 228 | V8051011258 |
| V860901 297 | V1030150U 212 | V3010460U218 | V8051012258 |
| V860904 297 | V1030550U208 | V3550170 194 | V8051013258 |
| V865190 303 | V1030560U208 | V3550270 193, 196 | V8051014258 |
| V865191 302 | V1040850U | V3550370 192 | V8051015 258 |
| V865192 301 | V1040860U213 | V3550470 195 | V8104300 273 |
| V865193 302 | V1041050U 213 | V3550570 191 | V8104304 273 |
| V865195 302 | V1041060U 213 | V3550670 192 | V8104306 273 |
| V865196 302 | V1051150U 214, 229 | V3550870 192 | V8104320 273 |
| V865197 302 | V1051160U 214 | V3550970 192 | V8104326 273 |
| V865198 302 | V1051250U 215 | V3551270 196 | V8104356 273 |
| V865199 302 | V1051260U 215 | V3551370 196 | V8104406 273 |
| V865321 308 | V1052160U 214 | V4550150 196 | V8104426 273 |
| V865324 308 | V1054050U | V4550250 196 | V8108306 273 |
| V865327 308 | V1054060U | V4550350 196 | V8108326 273 |
| V865420 300 | V1054250U 215 | V4550650 196 | V8108426 273 |
| V865423 300 | V1054260U 215 | V4550850 196 | V8109506 257 |
| V865428 300 | V1060351U 216 | V8001000 245, 256, 287 | V8109526 257 |
| V865438 300 | V1060360U208 | V8001200 256, 287 | V8205505 282 |
| V890252 312 | V1060450U208 | V8002000 245, 254 | V8205704 282, 287 |
| V1010141U203 | V1060461U 216 | V8002010 254 | V8205705 282, 287 |
| V1010151U203 | V1060550U216 | V8002020 255, 300 | V8221111279 |
| V1010250U 204 | V1060560U216 | V8002030 255, 294 | V8221112279 |
| V1010260U 204 | V1070160U 217, 229 | V8002060 243, 248 | V8221113279 |
| V1010450U 204 | V1070360U 217, 230 | V8002200 254 | V8221114279 |
| V1010460U 204 | V1070760U 217 | V8002210 254 | V8221115279 |
| V1011150U203 | V1080150U 219 | V8002230 254 | V8221121281 |
| V1011160U203 | V1080160U 219 | V8005101 247 | V8221131280 |
| V1020161U 206 | V1080350U219 | V8005102 247 | V8222120 281 |
| V1020251U 206 | V1080360U219 | V8005103 247 | V8222130 280 |
| V1020951U 206 | V1081350U 222 | V8005104 247 | V8222138 280 |
| V1021061U 206 | V1081360U 222 | V8005105 247 | V8222150 280 |
| V1021150U 206 | V1082350U222 | V8005111247 | V8223140 281 |
| V1021170U206 | V1082360U222 | V8005112 247 | V8223142 281 |
| V1021260U 206 | V1120651U222 | V8005113 247 | V8223144 281 |
| V1021571U206, 228 | V1120661U 222 | V8005114 247 | V8223145 281 |
| V1021580U 206 | V1130460U 223 | V8005115 247 | V8223146 281 |
| V1021840U 202 | V1130560U 225 | V8005170 244 | V8223147 281 |
| V1021850U 202 | V1200251U 221 | V8005171 247 | V8223148 281 |
| V1021860U 202 | V1200261U 221 | V8005172 247 | V8229001 279 |
| V1023550U212, 229 | V1200350U221 | V8005173 247 | V8229100 279, 287 |
| V1023560U212 | V1200360U221 | V8005174 247 | V8229104 279 |
| V1023950U212 | V1200451U 221, 230 | V8005175 247 | V8252306 290 |
| V1023960U212 | V1200461U 221 | V8006100 250 | V8252316291 |
| V1024850U 208 | V1210160U 224 | V8006110 250 | V8252326 291 |
| V1024860U208 | V1210170U 224 | V8006120 251, 300 | V8252336 291 |
| V1025050U210 | V2510850U 227 | V8006160 250 | V8252346 291 |
| V1025060U210 | V2510860U 227 | V8006200 251 | V8252356 289 |
| | | | |

321

| V8252366 288 | V8561802 311 | V845528009TB264, 265 | WH30 13, 31 |
|-------------------|--------------------------|---------------------------------|----------------------|
| V8252406 290 | V8651126 304 | V845533010LE267 | WH40 48 |
| V8252416290 | V8651153 304 | V845533020LE268 | WHB 13, 15, 30 |
| V8255621 249 | V8651154304 | V845533030LE268 | WHM 13, 31 |
| V8255622 249 | V8651160304 | V845533040LE268 | WHP 13, 15, 30, 31 |
| V8255623 244, 249 | V8651161304 | V845533060LE268 | Windgard 172 |
| V8255624 249 | V8651162304 | V845533120 269 | Wind Jammer IV 173 |
| V8255625 249 | V8651164304 | V845533140 269 | Wire Mesh |
| V8257272 286 | V8651173305 | V845533170 269 | Face Shield 106, 109 |
| V8257275 286 | V8651175305 | V845534010LE 267 | X |
| V8257282 287 | V8651176305 | V845534060 270, 292, 296 | X35 127 |
| V8257285 287 | V8651182305 | V845534140 270 | X300 124 |
| V8455277-5LE 266 | V8651184305 | V845822006LE267 | X300RX126 |
| V8561101 311, 312 | V8651185 305 | VL-1115-X 276 | X330 124 |
| V8561102 311 | V8651187305 | VL-1125-X 276 | X350 124 |
| V8561201 311, 312 | V8651189 305 | VL-1825-X 276 | XM300122 |
| V8561202 311 | V8651203 304 | w | XM310122 |
| V8561301 311, 312 | V82005805 282, 287 | WB-1010-X 258 | XM320123 |
| V8561302 311 | V84088025 287 | WB-6006258 | XM330 |
| V8561401 311, 312 | V84088050 287 | WB-6010-X258 | XM340123 |
| V8561402 311 | V84537065 294, 296 | WB-6020-X258 | XM340RX 126 |
| V8561501 311, 312 | V84553496 270 | Welding and Arc | XP420 |
| V8561502 311 | V85523100 295 | Flash Harness 257 | XP450 121 |
| V8561601 311, 312 | V845179065 292, 294, 296 | Welding Helmet 3, 8, 12, 14, | XP460 121 |
| V8561602 311 | V845423012LE 269 | 15, 21, 23, 25, 27, 28, 30, 31, | XPS502 118, 119 |
| V8561701 311, 312 | V845423018LE 269 | 32, 33, 34, 37, 38, 39, 40, 41, | XPS530119 |
| V8561702 311 | V845525006LE266 | 42, 43, 46, 48, 49, 105, 170 | |
| V8561801 311, 312 | V845526006LE262, 266 | Western Outlaw 157, 169 | |

NOTES

NOTES





Our Family of U.S. Brands















800.323.7402 orders.usa@surewerx.com surewerx.com/usa

PPEWELDING21

Be Smart. Be Safe. Be Sure.