




Be Smart. Be Safe. Be Sure.®

# SAFETY PRODUCTS

EUROPEAN CATALOGUE

# 20 25

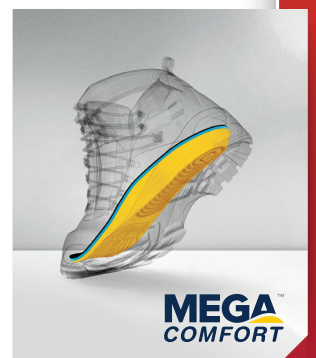



# ABOUT SureWerx

BE SMART. BE SAFE. BE SURE.

Co-headquartered in Vancouver, British Columbia, and Elgin Illinois, SureWerx™ is a leading supplier of professional tool, equipment and safety products for workers. SureWerx markets its products in Canada under the JET®, Strongarm®, ITC®, STARTECH®, Pioneer®, Ranpro®, PeakWorks®, Jackson®, Wilson®, Curv-O-Mark®, Due North® and Sellstrom® brands, and in the United States under the American Forge & Foundry®, Pioneer®, PeakWorks®, Jackson®, Wilson®, Curv-O-Mark®, Due North®, Geroline/K1 and Sellstrom® brands. And now in Europe under our Jackson®, Sellstrom®, Due North®, Geroline/K1, Balder® and Curv-O-Mark® brands, SureWerx™ offers unparalleled access to its brands through its partner distributor network servicing the industrial, construction, safety, and automotive aftermarket in North America and Europe.

[www.surewerx.com](http://www.surewerx.com)



*"We want all of our distributor partners and the end users of our products to experience tangible value for the products and services we offer and we will continue to enhance that proposition vastly over the coming years"*

— A message from our CEO, Chris Baby

Building a tool & equipment business

1957–2000

● Acquires Pioneer

● Acquires PeakWorks

● Acquires Sellstrom

● Acquires Ranpro

● Establishes STARTECH

● Acquires KP Industries

● Acquires Jackson Safety

● Acquires Wilson Brands

2009–today

2009

2014

2015

2016

2018

Building a health, safety and productivity business

## OUR COMMITMENT TO THIS REGION

To bring a range of feature rich PPE products and services to our distributor partners in the industrial, automotive, safety, medical and food markets.

As we only sell our own brands we control the appropriate certification of the products and the quality of the manufacture.

Our new catalogue includes new 'exclusive' products in the following categories:

- **PAPR systems**
- **Welding helmets**
- **Auto Darkening Filters**
- **Welding blankets and curtains**
- **Tools**
- **Arc flash protection**
- **Fall protection**
- **Head, face and eye protection**
- **Knee and elbow protection**
- **Slip protection**

## OUR FUTURE COMMITMENT TO THE REGION

- Continue to bring new 'exclusive' certified products to the markets.
- Invest in the systems, processes and people to deliver the best customers experience.
- Invest in your businesses with training and Marketing support.

# EMEA

Europe, Middle East and Africa

**JACKSON**  
SAFETY

**FS**  
FALL SAFE

**OBERON**  
TM

**sellstrom**

**CURV-0-MARK**

**dn**  
duenorth

**KI**  
SERIES

**NEOS**

**MEGA**  
COMFORT

[www.surewerx.eu](http://www.surewerx.eu)

*"Our acquisition of Jackson Safety in 2018 provided us with a platform in Europe on which we intend to build a comprehensive health, safety and productivity focused business. We have a successful track record in achieving this goal in other regions and now with the acquisitions of Fallsafe (fall protection) and Oberon (Arc flash protection) we have extended our product portfolio in Europe. Our investment is already considerable and this 2025 SureWerx catalogue reflects our commitment to delivering the right products to the worker to ensure they are totally confident of their health and safety and can concentrate on their productivity and delivering their best work."*



— A message from Clive Shepherd  
GM/VP - EMEA Region

● Acquires ADA Solutions

● Acquires Due North

● Acquires Geroline

● Acquires Footwear Specialties International (FSI)

● Acquires MegaComfort

● Acquires Neos Overshoe

● Acquires Oberon

● Acquires Fall Safe

● Acquires Engineered Plastics and Kinesic

2019

2020

2022

2024

# YOUR BEST WORK YET ● ● ● NEEDS YOUR TOTAL FOCUS

The safety and productivity of every professional worker is our goal. Our mission is to design products that deliver on this goal. We are always finding better ways help increase worker productivity and safety.



Every day 100's of professional workers are injured at work - industrial accidents are avoidable.



Our goal is to ensure that you return home, after a safe and productive day at work, in the same healthy condition as you went to work.



Legislation and regulation continue to increase safety at work and all of our products will meet or exceed the necessary levels.



We also work to ensure that all of our distributors receive product knowledge training to ensure they provide the right product for the right application. We are committed to understanding the needs of the professional end users.



When workers are confident that their PPE is designed with their health and safety in mind they can concentrate on the job at hand, achieving maximum productivity.

## ACCIDENTS


## INJURIES

## RISK

Reduce ● ● ●



Increase ● ● ● ●

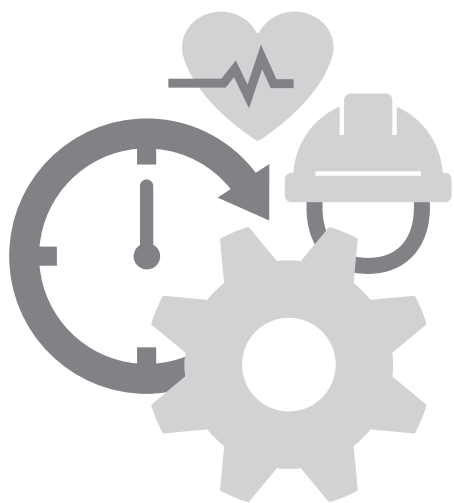

**HEALTH**  
**SAFETY**  
**PRODUCTIVITY**  
Finding a better way



Be Smart. Be Safe. Be Sure.®

# YOUR BEST WORK YET

12

## WELDING PROTECTIVE EQUIPMENT

84

## PERSONAL PROTECTIVE EQUIPMENT

# NEEDS THE RIGHT PRODUCT FOR THE RIGHT APPLICATION

|                          | Page    |
|--------------------------|---------|
| PAPR Welding Helmets     | 16-25   |
| PAPR Face Shield         | 26-31   |
| Welding Helmets          | 40-65   |
| Laser Welding Protection | 66-67   |
| Welding Filters          | 68-73   |
| Welding Blankets         | 74-75   |
| Welding Curtains         | 76-77   |
| Curv-O-Mark Tools        | 78-83   |
| Arc Flash Protection     | 84-89   |
| Face Shields             | 92-97   |
| Goggles                  | 98-101  |
| Glasses                  | 102-105 |
| Fall Protection          | 106-107 |
| Head Protection          | 108-109 |
| Hearing Protection       | 112-113 |
| Knee & Elbow Protection  | 114-117 |
| Slip Protection          | 118-119 |
| Product Index            | 122-125 |
| Warranty Table           | 126     |

## MARKET FOCUS

| INDUSTRIAL | CONSTRUCTION | METAL FABRICATION | AUTOMOTIVE | ELECTRICITY | WORK AT HEIGHT | AGRICULTURE | FOOD PROCESSING | MEDICAL |
|------------|--------------|-------------------|------------|-------------|----------------|-------------|-----------------|---------|
|            |              |                   |            |             |                |             |                 |         |



# PPE REGULATION





# THERE ARE 3 CATEGORIES OF PPE

## PPE CATEGORY I

### MINOR RISKS

Minimal risks with quickly disappearing side effects. No permanent health risks.

Marking:



European/UK conformity

## PPE CATEGORY II

### CONSIDERABLE RISKS

Potentially irreversible health risks, but not lethal.

Not part of Cat. I. or Cat. III.

Marking:



European/UK conformity

## PPE CATEGORY III

### HIGH & LETHAL RISKS

Risks that may cause very serious consequences such as death or irreversible damage to health.


Marking:



European/UK conformity

'xxxx' - Identification number of the body involved in assessment of production control (module C2) or quality assurance (module D) system

# WELDING PROTECTION

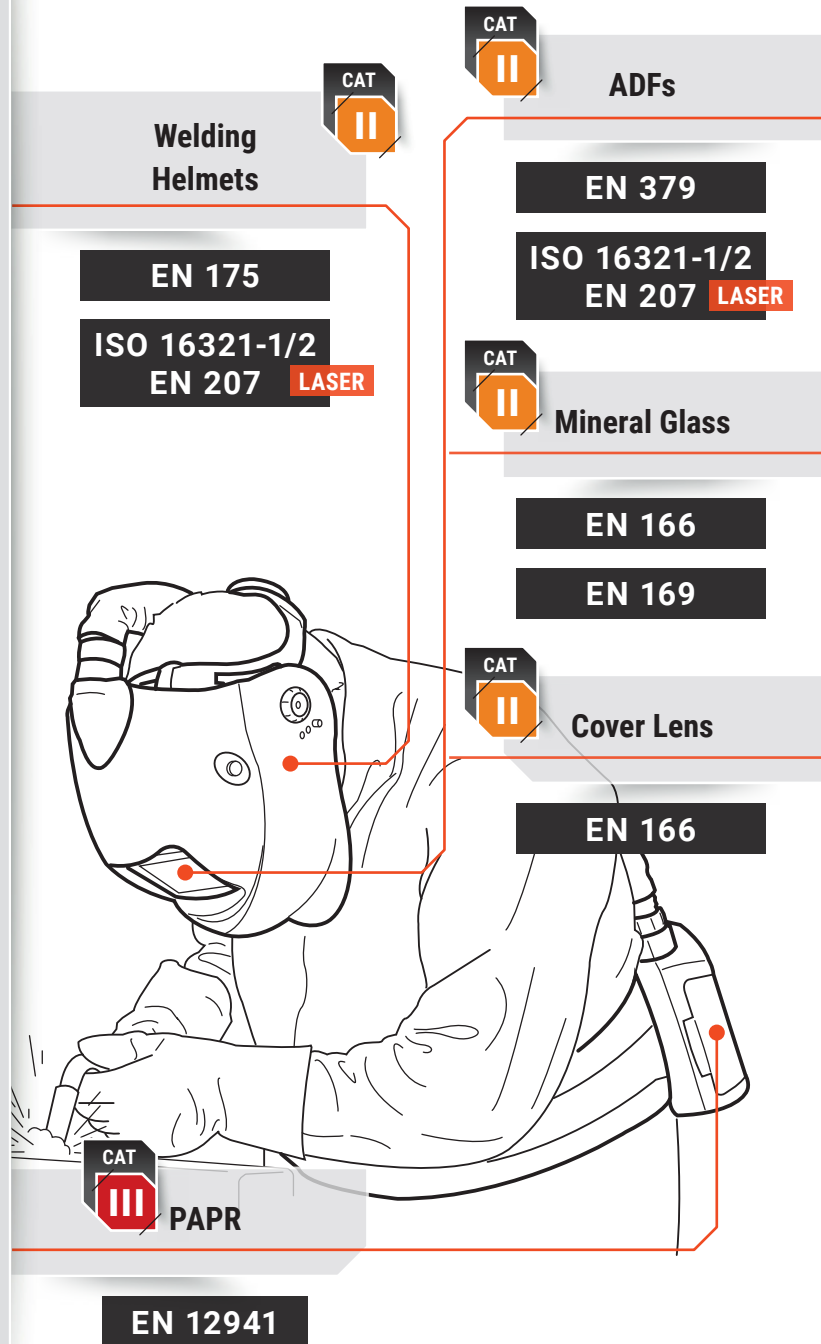

EN 166 - Personal eye protection, EN 169 - Welding filters, EN 175 - Welding helmets, ISO 16321-1/2 EN 207 - Laser Eye-Protectors, EN 379 - Automatic welding filters, EN 12941 - Respiratory protectors - PAPR (Powered Air Purifying Respirator)

# PPE REGULATION

## ARC FLASH PROTECTION

Face Shield &  
Hood



GS-ET-29

EN 166

EN 170



Coat &  
Overalls

IEC 61482-2

## EYE & FACE PROTECTION

Face Shields



EN 166

EN 169

EN 171

Glasses &  
Goggles



EN 166

EN 169

EN 170

EN 172

EN 166 - Personal eye protection, EN 169 - Welding filters, EN 170 - Ultraviolet filters, EN 171 - Infrared filters, EN 172 - Sunglare filters, GS-ET-29 - Face shields for electrical work, IEC 61482-2 - Protective Clothing against Thermal Arc Hazards of an Electric Arc

## GENERAL PPE

Hard Hats



EN 397

Earplugs



EN 352-2

Elbow Pads



Manufacturer assured compliance with the Essential Health and Safety Requirements of PPE Regulation (EU) 2016/425.

Knee Pads



EN 14404

Traction Aids



Issue of CE certificate based on the assessment of Notified Body of compliance with the Essential Health and Safety Requirements of PPE Regulation (EU) 2016/425.

## FALL PROTECTION

Hard Hats



EN 397

EN 50365

Harness



EN 358

EN 361

EN 813

Lanyards



EN 354

EN 355

EN 358

Ropes



EN 1891

EN 397 - Industrial Safety Helmets - Hard hats, EN 50365 - Electrically insulating helmets (for use on low voltage installations), EN 352-2 - Hearing protectors - Ear plugs, EN 14404 - Knee protectors, EN 354 - Personal fall protection equipment - Lanyards, EN 355 - Personal protective equipment against falls from a height - Energy absorbers, EN 358 - Personal protective equipment for work positioning and prevention of falls from a height - Belts and lanyards for work positioning or restraint, EN 361 - Personal protective equipment against falls from a height - Full body harnesses, EN 813 - Personal fall protection equipment - Sit harnesses, EN 1891 - Personal protective equipment for prevention of falls from a height - Low stretch kernmantel ropes

# RESPIRATORY PROTECTION PPE

## YOUR HEALTH MATTERS



Health hazards associated with welding processes typically include exposures to ultraviolet (UV) radiation and intense visible light that have the potential to cause eye damage. Physical eye hazards include welding spatter and grinding particles. Professional welders know about these hazards and provide protection with welding helmets and auto-darkening welding filters.



But other hazards – like **welding fumes, which contain particles** – are sometimes not as well known and may not be addressed. Prolonged exposure to welding fumes can lead to cancer of the lung, larynx and urinary tract, as well as nervous system and kidney damage.

## REDUCE EXPOSURE TO HAZARDS

### Understand the risks

Identify the hazard - metal fumes, gases, vapours, mist, dust.  
The selection of respiratory protection should be the result of the **risk assessment** conducted by a professional health and safety officer.

### Maintain clean surfaces

Welding surfaces should be cleaned of any coating that could potentially result in toxic exposure levels.

### Avoid breathing fume and gases

Position yourself to avoid breathing fume and gas, for example, stay upwind of welding fumes when working in open or outdoor areas. Be aware that welding outdoors or in open work environments does not guarantee safe ventilation.

### Use general or local ventilation

PAPR is not suitable for work in poorly ventilated areas where oxygen level is suspected to be below 17%.

Ventilation can reduce fume and gas levels in the work area and remove fume and gases from the welder's breathing zone.

### Wear respiratory protection

Chose the right respiratory protection and reduce exposures to safe levels.

#### Metal fumes



Fine, airborne particles from metal generated by condensation of vaporized material at high temperatures.

#### Gases



A normally formless fluid, often odourless and invisible, can spread freely and quickly through the air.

#### Vapours



Gases formed when solids or liquids evaporate at room temperatures.

#### Mist



Tiny liquid droplets generated by condensation or by breaking up a liquid into the dispersed state, in processes such as spraying.

#### Dust



Particulate matter formed when solid matter is broken down into fine, airborne particles. In welding about 95% is particle filtration.

## PROTECTION CLASSIFICATION

| TH1                            | TH2                           | TH3                             |
|--------------------------------|-------------------------------|---------------------------------|
| inward leakage max. <b>10%</b> | inward leakage max. <b>2%</b> | inward leakage max. <b>0.2%</b> |
| <b>NPF = 10</b>                | <b>NPF = 50</b>               | <b>NPF = 500</b>                |

NPF - Nominal Protection Factor

Based on EN 12941

Awareness is the first step in controlling hazards. Investing in the right personal protective equipment creates a healthier, safer and more productive workplace.



**HEALTH  
SAFETY  
PRODUCTIVITY**  
Finding a better way

# PAPR SYSTEMS

HEADTOPS

## HALF MASK

● ● ●  
HALF MASK



NEW

## WELDING HELMETS

● ● ●  
WH25 DUO



● ● ●  
280 SERIES



● ● ●  
TRANSLIGHT  
355



● ● ●  
TRANSLIGHT  
FLIP 455



PAPR SYSTEMS

## AIRMAX

TH3



## AIRMAX+

TH3



## AIRMAX+

TH3



## AIRMAX+

TH3



NEW

TM3

AIRMAX HM

Chemical upgrade available

A1B1E1K1 P R SL



HALF MASK WILL FIT UNDER ANY  
STANDARD WELDING HELMET OR FACE SHIELD

Chemical upgrade available

A1B1E1K1 P R SL

COMING IN 2025



OPTIONAL

## ACCESSORIES



BACKPACK



FR RESISTANCE

COMPATIBLE WITH ALL ABOVE  
PAPR SYSTEMS



BELT WITH  
LEATHER STRAPS  
AND HARNESS

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)



Jackson Safety® PAPR Welding

## AIRMAX® with DUO

PAPR WELDING

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet with ADF (odour removing filter sold separately)



**INDUSTRY PROVEN  
SINGLE SPEED  
BLOWER MOTOR**



**LIGHTWEIGHT**



**EXTERNAL  
GRIND BUTTON**

Quick changes  
between modes



**EASY TO OPERATE**

Particle Protection

**TH3**

Airflow

**170 - 210 lpm**

Charging time

**5 hrs**

Operation time

**9 hrs**

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)



- **TH3 P R SL** best in class (see table opposite)
- Air flow: **170 to 210 lpm**
- **Audible Filter Alarms** to inform when filters need changing or low battery
- Operation time up to **9 hours**
- **Light weight 990g** (blower unit, battery and filter)
- P3 filter with increased surface area
- Easy to operate
- Replaceable and rechargeable 4 cell Li-ion battery 7.4V/5200mAh. Charging time: 5 hours
- Replacement filter available
- Fitted with **flame retardant supporting belt** and **hose cover** for prolonged operational time
- Noise level 75dBA
- Unit is CE Certified

- Optical classes 1/1/1/2
- 110 x 90 mm cartridge size, 92 x 41 mm viewing area
- Shade range 9-13, sensitivity and delay adjustment, grinding mode
- External shade adjustment
- Positive click mode to grind
- ADF warranty: 1 year



**More details about the WH25 DUO welding helmet on page 44.**

CE  
0082

EN 12941:1998+A1:2003+A2:2008  
TH3 P R SL

### AIRMAX PAPR SYSTEM

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| J7050      | AIRMAX PAPR System with Duo Welding Helmet 4/9-13 ADF - Single Speed | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                  | Case Qty/MOQ |
|------------|--|--------------|
| J7051      | WH25 DUO PAPR Welding Helmet with 4/9-13 ADF | 1            |
| J7063      | AIRMAX Welding PAPR FR Hose & Cover          | 1            |
| J5241      | AIRMAX Welding PAPR FR Hose Cover            | 1            |
| J7065      | AIRMAX Welding PAPR Motor                    | 1            |
| J7210      | AIRMAX Welding P3 PAPR Filter                | 6            |
| J7067      | AIRMAX Welding PAPR Charger                  | 1            |
| J7068      | AIRMAX Welding PAPR 4C Battery               | 1            |
| J7069      | AIRMAX Welding PAPR Waist Belt               | 1            |
| 40391      | PAPR Carrying Bag - optional extra           | 1            |
| J7061      | DUO PAPR Face Seal                           | 1            |

**HEALTH SAFETY PRODUCTIVITY**  
Finding a better way


Jackson Safety® PAPR Welding

## AIRMAX+ with 280 SERIES

PAPR WELDING

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet (odour removing filter sold separately)



**SUPER KOOL™**  
**HIGH TEMPERATURE PAINT COATING**



### LIGHTWEIGHT

Maximum comfort and safety



### EXTREMELY DURABLE

Molded from Super Tuff nylon



### VERSATILITY

Lift front with mineral glass Shade 10



INCLUDING **SPARK ARRESTOR**

Particle Protection

**TH3**

Adjustable airflow

**170 - 240 lpm**

Charging time

**5 hrs**

Operation time

**10 hrs**

Ingress Protection

**IP**

**5**

**4**

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke


Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm (**10 lpm Increment**)
- **IP 54** Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to **10 hours** with a new filter P R SL and airflow 170 l/min
- In combination with 280 Series 'Bucket style' welding helmet
- Unit is CE Certified

- 280 Series welding helmet has been an industry leader for decades
- Made in the USA, the 280 Series is a traditional bucket style welding helmet
- Molded from **Super Tuff nylon** – lighter than fiberglass and extremely durable
- Patented **Sel-Snap lens retention system** provides easy loading of filter, cover and protective plates
- Lift front comes standard with spring loaded positive lock feature
- Our proprietary **SUPER KOOL SILVER COATING** keeps the helmet **30% cooler** than standard helmets and sheds spatter without burning
- Provides maximum operator comfort and safety
- Sellstrom's patented **"quick-release"** ratchet headgear suspension with sweatband included
- Specially designed shape for use with cartridge respirators

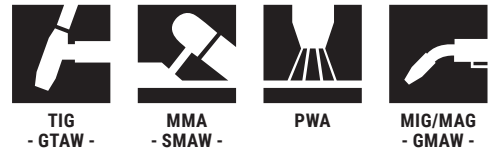

More details about the 280 Series welding helmet on page 40.



EN 12941 TH3 P R SL 1024

### AIRMAX+ with 280 SERIES PAPR SYSTEM

| Product No | Description                                 | Case Qty/MOQ |
|------------|---|--------------|
| 40421      | AIRMAX+ PAPR with 280 Series Welding Helmet | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                     | Case Qty/MOQ |
|------------|---|--------------|
| 40340      | FR Hose with cover, 85 cm                       | 1            |
| J5241      | FR Hose cover, 105 cm                           | 1            |
| 40381      | AIRMAX+ Blower unit - 8 Speed                   | 1            |
| 40332      | HEPA PAPR filter                                | 6            |
| 40363      | PAPR charger                                    | 1            |
| 40353      | Replacement 4-Cell 7.4V Battery                 | 1            |
| 40371      | Replacement Waist belt                          | 1            |
| 40311      | Replacement Pre-filters                         | 10           |
| 40312      | Odour removing filter                           | 10           |
| 47421      | 280 Series PAPR Complete Head Top (No hose)     | 1            |
| J7260      | PAPR Headgear                                   | 5            |
| 40313      | Spark arrestor                                  | 5            |
| J5250      | Face Seal                                       | 5            |
| 40391      | PAPR Carrying Bag                               | 1            |
| 40368      | FR Comfort Backpack for PAPR blower             | 1            |
| 40369      | FR Comfort belt with leather straps and harness | 1            |

Jackson Safety® PAPR Welding

## AIRMAX+ with TRANSLIGHT™ 355

PAPR WELDING

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet with ADF (odour removing filter sold separately)



**ULTRA SLIM  
TRUE COLOR ADF WITH  
1/1/1/1 OPTICAL RATING**

**INCLUDING  
SPARK  
ARRESTOR**



**LIGHTWEIGHT**

**521 g**

Welding Helmet with ADF



**EXTERNAL**

**GRIND BUTTON**

Quick changes between modes



**OUTER LENS**

**1.5 mm THICKNESS**

Greater impact & heat resistance



**INTEGRATED  
AIR SYSTEM**

Control of air supply to  
upper or  
lower part of helmet



**370™**  
SPEED DIAL

**TRANSLIGHT™  
SERIES**

Particle Protection

**TH3**

Adjustable airflow

**170 - 240 lpm**

Charging time

**5 hrs**

Operation time

**10 hrs**

Ingress Protection

**IP**

**5**

**4**

- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm (**10 lpm Increment**)
- **IP 54** Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to **10 hours** with a new filter P R SL and airflow 170 l/min
- In combination with Translight 355 welding helmet - featuring **ultra slim true color ADF** with **external mode control**
- Unit is CE Certified

- Translight 355 Series is super-lightweight with a sleek, modern design and look
- Auto Darkening Filter meets **1/1/1/1 Optical Clarity Standard**, the highest in the industry
- ADF contains external grind button for quick changes between modes
- Welding, Grinding, Cutting modes included
- Includes patented **370 Speed Dial** ratcheting headgear system
- Switching speeds of 0.25 ms
- Solar & Lithium Batteries (CR2032)
- 4 sensor technology for optimal performance
- Outer lens at 1.5 mm thickness



40040



More details about the Translight 355 welding helmet on page 50.



EN 12941 TH3 P R SL 0082

**AIRMAX+ with TRANSLIGHT 355 PAPR SYSTEM**

| Product No | Description                                     | Case Qty/MOQ |
|------------|---|--------------|
| 40040      | AIRMAX+ PAPR with Translight 355 Welding Helmet | 4            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description                                     | Case Qty/MOQ |
|------------|---|--------------|
| 40341      | FR Hose with cover, 105 cm                      | 1            |
| J5241      | FR Hose cover, 105 cm                           | 1            |
| 40381      | AIRMAX+ Blower unit - 8 Speed                   | 1            |
| 40332      | HEPA PAPR filter                                | 6            |
| 40363      | PAPR charger                                    | 1            |
| 40353      | Replacement 4-Cell 7.4V Battery                 | 1            |
| 40371      | Replacement Waist belt                          | 1            |
| 40311      | Replacement Pre-filters                         | 10           |
| 40312      | Odour removing filter                           | 10           |
| 40313      | Spark arrestor                                  | 5            |
| 40100      | Translight 355 shell with Face Seal and Airduct | 1            |
| 47010      | Translight 355 PAPR helmet with ADF             | 1            |
| 40200      | Translight 355 PAPR Face Seal                   | 1            |
| 40391      | PAPR Carrying Bag                               | 1            |
| J8570      | 375 PAPR head gear                              | 1            |
| J5237      | 370 sweat band                                  | 2            |
| 40368      | FR Comfort Backpack for PAPR blower             | 1            |
| 40369      | FR Comfort belt with leather straps and harness | 1            |


Jackson Safety® PAPR Welding

## AIRMAX+ with TRANSLIGHT™ FLIP 455

PAPR WELDING

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet with ADF (odour removing filter sold separately)



**EXTRA LARGE  
FACE SHIELD FOR  
GRINDING OPERATIONS**

**INCLUDING  
SPARK  
ARRESTOR**



**FLIP-UP**

**WELDING - GRINDING**

Easy-to-use lift mechanism



**EXTRA-LARGE  
FACE SHIELD**

Superior peripheral vision



**OUTER LENS**

**1.5 mm THICKNESS**

Greater impact & heat resistance



**INTEGRATED  
AIR SYSTEM**

Control of air supply to  
upper or  
lower part of helmet



**370™**  
SPEED DIAL

**TRANSLIGHT™  
SERIES**

Particle Protection

**TH3**

Adjustable airflow

**170 - 240 lpm**

Charging time

**5 hrs**

Operation time

**10 hrs**

Ingress Protection


**IP**

**5**

**4**

- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm (**10 lpm Increment**)
- **IP 54** Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to **10 hours** with a new filter P R SL and airflow 170 l/min
- Breathing hose with flame retardant cover - protection from sparks and spatter
- Large controls - Easy to use with oversized gloves
- In combination with Translight 455 welding helmet - Easy-to-use lift mechanism reveals a 297 sq. cm clear extra-large polycarbonate face shield for grinding operations
- Unit is CE Certified

- Flip system ensures maximum safety – provides uninterrupted face protection when switching from welding to grinding operations
- High quality **True Color ADF** provides a full **60 square cm** viewing area
- Features an extra-large face shield which provides superior peripheral vision
- Welding, grinding, cutting modes functions are standard features
- 4 sensor technology for optimal performance
- Auto-darkening filter meets **1/1/1/1 optical clarity** standard, the highest in the industry
- Includes patented **370 Speed Dial** ratcheting head-gear system
- Switching speeds of 0.1 ms
- Welding helmet with Mineral glass Shade 10 available as custom order

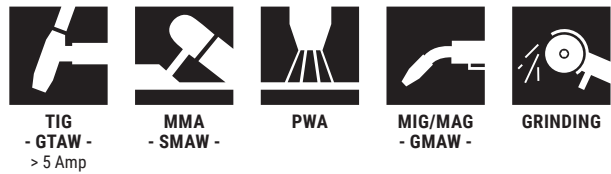

More details about the Translight Flip 455 welding helmet on page 52.



EN 12941 TH3 P R SL 0082

### AIRMAX+ with TRANSLIGHT FLIP 455 PAPR SYSTEM

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| 40041      | AIRMAX+ PAPR with Translight Flip 455 Welding Helmet | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| 40341      | FR Hose with cover, 105 cm                           | 1            |
| J5241      | FR Hose cover, 105 cm                                | 1            |
| 40381      | AIRMAX+ Blower unit - 8 Speed                        | 1            |
| 40332      | HEPA PAPR filter                                     | 6            |
| 40363      | PAPR charger   | 1            |
| 40353      | Replacement 4-Cell 7.4V Battery                      | 1            |
| 40371      | Replacement Waist belt                               | 1            |
| 40311      | Replacement Pre-filters                              | 10           |
| 40312      | Odour removing filter                                | 10           |
| 40313      | Spark arrestor                                       | 5            |
| 40101      | Translight Flip 455 shell with Face Seal and Airduct | 1            |
| 47011      | Translight Flip 455 PAPR helmet with ADF             | 1            |
| 40201      | Translight Flip 455 PAPR Face Seal                   | 1            |
| 40391      | PAPR Carrying Bag                                    | 1            |
| J8570      | 375 PAPR head gear                                   | 1            |
| J5237      | 370 sweat band                                       | 2            |
| 40368      | FR Comfort Backpack for PAPR blower                  | 1            |
| 40369      | FR Comfort belt with leather straps and harness      | 1            |

Jackson Safety® PAPR Welding

## AIRMAX+ with TRANSLIGHT™+ 555

PAPR WELDING

PAPR System with Welding Helmet

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR welding helmet with ADF (odour removing filter sold separately)



**EXTRA LARGE  
VIEWING AREA**  
98 x 82 mm



**INCLUDING  
SPARK  
ARRESTOR**



**EXTERNAL**

**SHADE MICRO  
ADJUSTER**

Micro adjust to  
eye & environment



**EXTERNAL**

**GRIND BUTTON**

Quick changes between modes



**OUTER LENS**


**1.5 mm THICKNESS**

Greater impact & heat  
resistance



**INTEGRATED  
AIR SYSTEM**

Control of air supply to  
upper or  
lower part of helmet



**370™**  
SPEED DIAL

**TRANSLIGHT™**  
SERIES

Particle Protection

**TH3**

Adjustable airflow

**170 - 240 lpm**

Charging time

**5 hrs**

Operation time

**10 hrs**

Ingress Protection

**IP**

**5**

**4**



- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm (**10 lpm Increment**)
- **IP 54** Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to **10 hours** with a new filter P R SL and airflow 170 l/min
- In combination with Translight 555 welding helmet - featuring **extra large 98 x 82 mm viewing area** and **innovative external adjuster**
- Unit is CE Certified

- Translight™ shell has a sleek modern design
- Helmet is lightweight & ergonomically balanced to reduce stress & fatigue
- Auto Darkening Filter meets **1/1/1/1 Optical Clarity** standard, the highest in the industry
- Includes an external grind button, so end users can switch modes with ease
- Features the new external shade adjuster to help aid in visual focus
- The new shade adjuster can finely tune shades up to +/- 1 full shade with .2 shade adjusting increments
- Welding, Grinding and Cutting can be done with this versatile ADF
- Includes patented **370 Speed Dial** ratcheting headgear system
- Advanced digital controls are a great QOL enhancement for welders
- Switching speeds of 0.2 ms



40043



**More details about the Translight+ 555 welding helmet on page 54.**

EN 12941 TH3 P R SL  0082

**AIRMAX+ with TRANSLIGHT+ 555 PLUS PAPR SYSTEM**

| Product No | Description                                      | Case Qty/MOQ |
|------------|--|--------------|
| 40043      | AIRMAX+ PAPR with Translight+ 555 Welding Helmet | 4            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description                                      | Case Qty/MOQ |
|------------|--|--------------|
| 40341      | FR Hose with cover, 105 cm                       | 1            |
| J5241      | FR Hose cover, 105 cm                            | 1            |
| 40381      | AIRMAX+ Blower unit - 8 Speed                    | 1            |
| 40332      | HEPA PAPR filter                                 | 6            |
| 40363      | PAPR charger                                     | 1            |
| 40353      | Replacement 4-Cell 7.4V Battery                  | 1            |
| 40371      | Replacement Waist belt                           | 1            |
| 40311      | Replacement Pre-filters                          | 10           |
| 40312      | Odour removing filter                            | 10           |
| 40313      | Spark arrestor                                   | 5            |
| 40103      | Translight+ 555 shell with Face Seal and Airduct | 1            |
| 47013      | Translight+ 555 PAPR helmet with ADF             | 1            |
| 40203      | Translight+ PAPR Face Seal                       | 1            |
| 40391      | PAPR Carrying Bag                                | 1            |
| J8570      | 375 PAPR head gear                               | 1            |
| J5237      | 370 sweat band                                   | 2            |
| 40368      | FR Comfort Backpack for PAPR blower              | 1            |
| 40369      | FR Comfort belt with leather straps and harness  | 1            |

Jackson Safety® PAPR Face Shield

## AIRMAX+ with F50

PAPR FACE SHIELD

PAPR System with Face Shield

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR face shield (odour removing filter sold separately)



**RESPIRATORY PROTECTION DURING GRINDING AND OTHER INDUSTRIAL TASKS**



**LARGE**

**VIEWING AREA**

225 x 144 mm




**OPTIMUM SAFETY**

**B**

Rated impact resistance

**INCLUDING SPARK ARRESTOR**



Particle Protection

**TH3**

Adjustable airflow

**170 - 240 lpm**

Charging time

**5 hrs**

Operation time

**10 hrs**

Ingress Protection

**IP**

**5**

**4**

- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm (**10 lpm Increment**)
- **IP 54** Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to **10 hours** with a new filter P R SL and airflow 170 l/min
- Large controls
- Easy to use with oversized gloves
- In combination with F50 face shield
- Breathing hose with flame retardant cover - protection from sparks and spatter
- Unit is CE Certified
- Respiratory protection during grinding and other industrial tasks where the wearer is exposed to contamination from solid and liquid particles
- Fitted with an **impact rated** grinding visor
- **Large viewing area 225 x 144 mm**
- Adjustable ergonomic headgear with airduct



GRINDING



0082 EN 12941 TH3 P R SL



J7265

### AIRMAX+ with F50 FACE SHIELD PAPR SYSTEM

| Product No | Description                  | Case Qty/MOQ |
|------------|------------------------------|--------------|
| J7265      | AIRMAX+ with F50 Face Shield | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                     | Case Qty/MOQ |
|------------|---|--------------|
| 40340      | FR Hose with cover, 85 cm                       | 1            |
| J5241      | FR Hose cover, 105 cm                           | 1            |
| 40381      | AIRMAX+ Blower unit - 8 Speed                   | 1            |
| 40332      | HEPA PAPR filter                                | 6            |
| 40363      | PAPR charger                                    | 1            |
| 40353      | Replacement 4-Cell 7.4V Battery                 | 1            |
| 40371      | Replacement FR Waist belt                       | 1            |
| 40311      | Replacement Pre-filters                         | 10           |
| 40312      | Odor removing filter                            | 10           |
| 40313      | Spark arrestor                                  | 5            |
| J7261      | F50 PAPR Face Shield                            | 1            |
| J5252      | F50 Visor Lens                                  | 20           |
| J7260      | F50 PAPR Head Gear                              | 5            |
| J5462      | PAPR Sweat Band                                 | 50           |
| J5251      | F50 PAPR Face Seal                              | 5            |
| 40368      | FR Comfort Backpack for PAPR blower             | 1            |
| 40369      | FR Comfort belt with leather straps and harness | 1            |

Jackson Safety® PAPR Face Shield

## AIRMAX+ with MAXVIEW

PAPR FACE SHIELD

PAPR System with Face Shield

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR face shield (odour removing filter sold separately)

INCLUDING  **SPARK ARRESTOR**



### CLEAR VISION

Premium Anti-Fog Coating




### MAXIMUM COMFORT

Fast & Easy Headgear Adjustments



### OPTIMUM SAFETY

High Impact Polycarbonate Window



### INDUSTRY-LEADING PANORAMIC VIEW



Particle Protection

**TH3**

Adjustable airflow

**170 - 240 lpm**

Charging time

**5 hrs**

Operation time

**10 hrs**

Ingress Protection

**IP**

**5**

**4**

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm (**10 lpm Increment**)
- **IP 54** Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to **10 hours** with a new filter P R SL and airflow 170 l/min
- Large controls
- Easy to use with oversized gloves
- Breathing hose with flame retardant cover - protection from sparks and spatter
- In combination with Maxview face shield
- Unit is CE Certified
- Oversized **370 Speed Dial™** ratcheting headgear guarantees a precise fit every time
- Patented **"Qwik-Fit"** swivel headband adjusts the suspension gear to the user's head for superior comfort
- Comes standard with a soft fabric sweatband for increased comfort and convenience
- Extended top-of-head coverage protects against hazards from above
- Built-in side and chin guard protects against splash and flying debris
- Lightweight and balanced construction for all-day comfort
- Extra-large polycarbonate window for superior optics and industry-leading panoramic views
- Up and down detents lock securely in place until manually adjusted



GRINDING

More details about the Maxview face shield on page 94.



EN 12941 TH3 P R SL



### AIRMAX+ with MAXVIEW FACE SHIELD PAPR SYSTEM

| Product No | Description                                       | Case Qty/MOQ |
|------------|---|--------------|
| 40601      | AIRMAX+ with Maxview Face Shield anti-fog coating | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                     | Case Qty/MOQ |
|------------|---|--------------|
| 40340      | FR Hose with cover, 85 cm                       | 1            |
| J5241      | FR Hose cover, 105 cm                           | 1            |
| 40381      | AIRMAX+ Blower unit - 8 Speed                   | 1            |
| 40332      | HEPA PAPR filter                                | 6            |
| 40363      | PAPR charger                                    | 1            |
| 40353      | Replacement 4-Cell 7.4V Battery                 | 1            |
| 40371      | Replacement FR Waist belt                       | 1            |
| 40311      | Replacement Pre-filters                         | 10           |
| 40312      | Odor removing filter                            | 10           |
| 40313      | Spark arrestor                                  | 5            |
| 47001      | Maxview (A/F) PAPR Complete Head Top (No hose)  | 1            |
| J8571      | PAPR 370 Headgear                               | 1            |
| J5244      | Standard face seal                              | 1            |
| 14214      | Clear replacement window                        | 36           |
| 14215      | Clear replacement window anti-fog               | 36           |
| J5237      | 370 sweat band                                  | 2            |
| 40368      | FR Comfort Backpack for PAPR blower             | 1            |
| 40369      | FR Comfort belt with leather straps and harness | 1            |

Jackson Safety® PAPR Face Shield

## AIRMAX+ with QUAD 500

PAPR FACE SHIELD

PAPR System with Face Shield

Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter and PAPR face shield (odour removing filter sold separately)

INCLUDING  **SPARK ARRESTOR**



### CLEAR VISION

Premium Anti-Fog Coating



### MAXIMUM COMFORT

Fast & Easy Headgear Adjustments



### VERSATILITY

Shade 5 or 8 IR Flip Windows



### PREMIUM MULTI-PURPOSE FACE SHIELD



Particle Protection

**TH3**

Adjustable airflow

**170 - 240 lpm**

Charging time

**5 hrs**

Operation time

**10 hrs**

Ingress Protection

**IP**

**5**

**4**

- **TH3** Particle Protection (Highest Possible Rating)
- **8 different** blower speed settings, adjustable airflow from 170 to 240 lpm (**10 lpm Increment**)
- **IP 54** Certified
- **Vibration** and **Filter Alarms** to inform when filters need changing or low battery
- Comes with **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to **10 hours** with a new filter P R SL and airflow 170 l/min
- Large controls
- Easy to use with oversized gloves
- Breathing hose with flame retardant cover - protection from sparks and spatter
- In combination with Quad 500 face shield
- Unit is CE Certified
- All Quad 500 products have been designed to offer maximum above-the-neck face protection, including an extra-large molded polycarbonate window featuring our premium anti-fog coating
- For added protection, the molded window is completely framed on the sides and chin and features an extra-large crown
- The Quad 500 offers exceptional panoramic views with virtually no distortion
- Ideal for grinding, cutting, oxy/acetylene cutting, plasma cutting, brazing and more
- The Quad 500 face shield is also available with an exclusive, **extra-large flip-up/flip-down IR window** for added eye protection when used in applications producing infrared hazards
- It's easy and safe—by keeping the Quad 500 clear window in the down position at all times, the operator can flip the IR shaded window up or down, providing uninterrupted face protection during cutting and grinding operations
- Flip windows available in:
  - **Shade 5 IR** for oxy/acetylene cutting, brazing, and plasma cutting
  - **Shade 8 IR** for oxy/acetylene welding and plasma cutting
- Both the clear and flip windows feature detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses

**More details about the Quad 500 face shield on page 96.**



EN 12941 TH3 P R SL

### AIRMAX+ with QUAD 500 FACE SHIELD PAPR SYSTEM

| Product No | Description   | Case Qty/MOQ |
|------------|---|--------------|
| 40620      | AIRMAX+ with Quad 500 Premium Multi-Purpose Face Shield                       | 4            |
| 40630      | AIRMAX+ with Quad 500 Premium Multi-Purpose Face Shield Flip Visor Shade 5 IR | 4            |
| 40633      | AIRMAX+ with Quad 500 Premium Multi-Purpose Face Shield Flip Visor Shade 8 IR | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                       | Case Qty/MOQ |
|------------|---|--------------|
| 40340      | FR Hose with cover, 85 cm                         | 1            |
| J5241      | FR Hose cover, 105 cm                             | 1            |
| 40381      | AIRMAX+ Blower unit - 8 Speed                     | 1            |
| 40332      | HEPA PAPR filter                                  | 6            |
| 40363      | PAPR charger                                      | 1            |
| 40353      | Replacement 4-Cell 7.4V Battery                   | 1            |
| 40371      | Replacement FR Waist belt                         | 1            |
| 40311      | Replacement Pre-filters                           | 10           |
| 40312      | Odor removing filter                              | 10           |
| 40313      | Spark arrestor                                    | 5            |
| 47020      | Quad 500/Clear PAPR Complete Head Top (No hose)   | 1            |
| 47030      | Quad 500/Shade 5 PAPR Complete Head Top (No hose) | 1            |
| 47033      | Quad 500/Shade 8 PAPR Complete Head Top (No hose) | 1            |
| J8572      | PAPR 370 Headgear                                 | 1            |
| J5244      | Standard face seal                                | 1            |
| 14250      | 21.8 x 20.9 x 0.15 cm clear anti-fog window       | 12           |
| 14255      | 10.94 x 23.12 x 0.017 cm Shade 5 IR visor         | 12           |
| 14258      | 10.94 x 23.12 x 0.017 cm Shade 8 IR visor         | 12           |
| J5237      | 370 sweat band                                    | 2            |
| 40368      | FR Comfort Backpack for PAPR blower               | 1            |
| 40369      | FR Comfort belt with leather straps and harness   | 1            |

Jackson Safety® PAPR Welding

## AIRMAX®+

PAPR System - Blower



### WELDING

Translight and 280 series welding helmets




### FACE SHIELD

Maxview, Quad 500 and F50 Face Shield



### SOFT HOOD

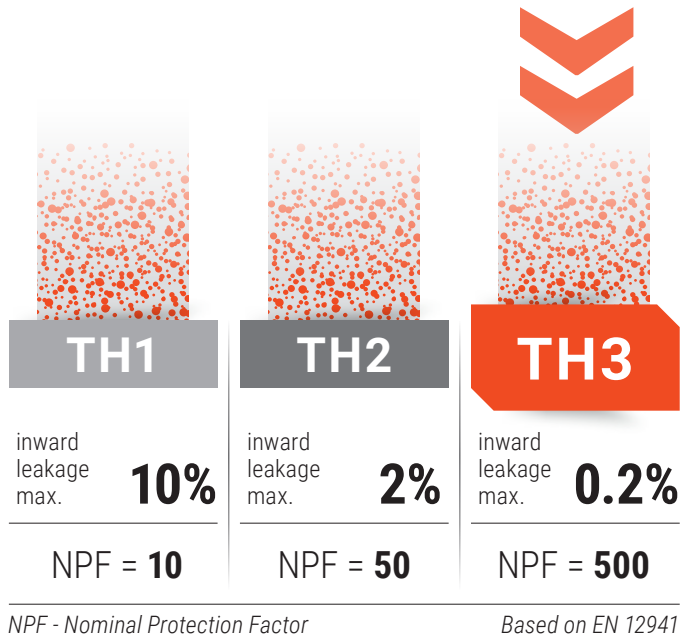

Particle Protection

**TH3**

Adjustable airflow

**170 - 240 lpm**

Charging time

**5 hrs**

Operation time

**10 hrs**

Ingress Protection

**IP**

**5**

**4**



- **TH3 Particle Protection - Highest Possible Rating**
- Air flow: **170 to 240 lpm (10 lpm Increment)**
- Blower System comes with **8 different blower speed settings**
- **IP 54 Certified** – Protects against dust (limited ingress, no harmful deposits) and water splash from all directions (limited ingress permitted)
- **Vibration** and **Audible Filter Alarms** to inform when filters need changing or low battery
- Comes with replaceable and rechargeable **HD 4 Cell Li-ion Battery 7.4V/5200mAh**. Charging time: 5 hours
- Operation time up to **10 hours** with a new filter P R SL and airflow 170 l/min
- Unit contains battery charger, battery, waist belt, hose, HEPA Filter, Pre-Filter, (odour removing filter sold separately)
- Sleek controls, large enough to use with oversized gloves
- Unit is CE Certified

### COMFORT PACKS



FR RESISTANCE



### BACKPACK



### BELT WITH LEATHER STRAPS AND HARNESS



CE  
0082


| Product No | Description                   | Case Qty/MOQ |
|------------|-------------------------------|--------------|
| 40381      | AIRMAX+ Blower unit - 8 Speed | 1            |

### SPARE PARTS & ACCESSORIES


| Product No | Description                                  | Case Qty/MOQ |
|------------|--|--------------|
| 40332      | HEPA PAPR filter                             | 6            |
| 40363      | PAPR charger                                 | 1            |
| 40353      | Replacement 4-Cell 7.4V Battery              | 1            |
| 40371      | Replacement Waist belt                       | 1            |
| 40311      | Replacement Pre-filters                      | 10           |
| 40312      | Odour removing filter                        | 10           |
| 40341      | FR Hose with cover, 105 cm                   | 1            |
| 40340      | FR Hose with cover, 85 cm                    | 1            |
| J5241      | FR Hose cover, 105 cm                        | 1            |
| J7064      | Hose without cover, 85 cm                    | 1            |
| 40313      | Spark arrestor                               | 5            |
| 40368      | FR Comfort Backpack for PAPR blower          | 1            |
| 40369      | Comfort belt with leather straps and harness | 1            |

## INGRESS PROTECTION RATING

IP 54



SOLID



WATER

- 1 Protected against solid objects greater than 50 mm such as a hand.
- 2 Protected against solid objects greater than 12.5 mm such as a finger.
- 3 Protected against solid objects greater than 2.5 mm such as screwdriver.
- 4 Protected against solid objects greater than 1 mm such as a wire.
- 5 Dust protected. Prevents ingress of dust sufficient to cause harm.
- 6 Dust tight. No ingress of dust.

- 1 Protected against vertically falling drops of water.
- 2 Protected against direct sprays of water up to 15° from the vertical.
- 3 Protected against direct sprays of water up to 60° from the vertical.
- 4 Protected against water splashed from all directions.
- 5 Protected against low pressure jets of water from all directions.
- 6 Protected against strong jets of water.
- 7 Protected against the effects of temporary immersion between 15 cm and 1 m for 30 minutes.
- 8 Protected against long periods of immersion under pressure.

NEW

Jackson Safety® PAPR Systems

**JACKSON**  
SAFETY

# PAPR CHARGING STATION

5-Station battery charger for Airmax PAPR System

PAPR SYSTEMS



**ALLOWS FOR VARIOUS CHARGING POSITIONS:  
TABLE-TOP, WALL MOUNTED VERTICALLY OR HORIZONTALLY**



## COMPATIBILITY

Charges Airmax batteries (J7068)



## MULTI CHARGING UNIT

Accommodates up to 5 batteries

- LED charge indicator for each charged battery:
  - **Red** - battery empty and charging,
  - **Green** - battery full or not connected
- Easy snap in / snap out battery placement into charging station
- No clutter with chargers' cables
- Easy single charger replacement in case of failure
- Main cable length: 2m
- Main power switch
- Frame material: plexi-glass, color: black
- Dimensions WxDxH: 370mm x 175mm x 173mm, Weight: 2400 g
- Operating temperature: 0 to 45°C
- Storage temperature: -20 to + 60°C
- Humidity: 10% to 90% relative
- Warranty: 2 years
- EU and UK version available
- Batteries not included

| Product No | Description                      | Case Qty/MOQ |
|------------|----------------------------------|--------------|
| 40364      | AIRMAX 5-Station Battery Charger | 1            |

Input Voltage

100-240 V 50-60 Hz

Output Voltage

8.4 V 5 x 1.5 A 5 x 12.5 W

Charging time

5 hrs

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)  
Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)  
[www.surewerx.eu](http://www.surewerx.eu)

Jackson Safety<sup>®</sup> PAPR Systems

## PAPR CHARGING STATION

5-Station battery charger for Airmax+ PAPR System



**ALLOWS FOR VARIOUS CHARGING POSITIONS: TABLE-TOP, WALL MOUNTED VERTICALLY OR HORIZONTALLY**



### COMPATIBILITY

**Charges Airmax+ batteries (40353)**



### MULTI CHARGING UNIT

**Accommodates up to 5 batteries**

- LED charge indicator for each charged battery:
  - **Red** - battery empty and charging,
  - **Green** - battery full or not connected
- Easy snap in / snap out battery placement into charging station
- No clutter with chargers' cables
- Easy single charger replacement in case of failure
- Main cable length: 2m
- Main power switch
- Frame material: plexi-glass, color: black
- Dimensions WxDxH: 370mm x 175mm x 173mm, Weight: 2400 g
- Operating temperature: 0 to 45°C
- Storage temperature: -20 to + 60°C
- Humidity: 10% to 90% relative
- Warranty: 2 years
- EU and UK version available
- Batteries not included

| Product No | Description                       | Case Qty/MOQ |
|------------|-----------------------------------|--------------|
| 40365      | AIRMAX+ 5-Station Battery Charger | 1            |

Input Voltage

100-240 V

50-60 Hz

Output Voltage

8.4 V

5 x 1.5 A

5 x 12.5 W

Charging time

5 hrs

HEALTH SAFETY PRODUCTIVITY

Finding a better way

# WELDING PROTECTION PPE



## WELDING HELMETS AND WELDING FILTERS

Designed to perform in a wide range of welding conditions, Jackson Safety® Helmets are available in a variety of styles and features.

Choose from a selection of filters — from **passive** to **digital ADF** platforms and numerous graphic designs to reflect personal style.



## PASSIVE VS. AUTO-DARKENING FILTER HELMETS

Passive helmets offer great protection.

Auto-Darkening Filters offer protection and productivity.

Both passive and Auto-Darkening Filter (ADF) welding helmets provide excellent eye protection. Research shows that ADF helmets also offer impressive productivity gains, as well as greater user comfort.

### ADDED BENEFITS OF AN ADF

#### Increased accuracy

Because the welder can always see what he's doing, and start in exactly the right spot.

#### Increased comfort

By eliminating the repetitive "lifting and nodding" that can cause neck strain.

#### Increased protection

From injuries caused by welding, chipping or grinding in the proximate area.

#### Increased peace of mind

Because even if the ADF should not become active during an arc, it still protects eyes from serious damage.

#### Increased productivity

By eliminating the time it takes to lift and nod the helmet before and after each weld.

### True Color ADF

JACKSON SAFETY<sup>®</sup> auto-darkening filters with 1/1/1/1 optical classification provide:

#### A clear view from various angles


Which can reduce eye fatigue (the need to move, adjust and refocus).

#### Superior optical quality

Allows you to do your most creative and productive work.



Welders at all experience levels know the value and essential protection requirements of the right helmet and filter for the right job. That's why we provide a range of welding helmets and filters with features that are just right for you.



HEALTH  
SAFETY

PRODUCTIVITY

Finding a better way

# WELDING HEADTOPS



**280  
SERIES**



**WH20  
ASPIRE**



**WH25  
DUO**



**REBEL**



**LEATHER  
WELDING HOOD**



**TRANSLIGHT  
355**



**GOOD**

**BETTER**

| CHOOSE YOUR HEADTOP      | 280 SERIES | WH20 ASPIRE | WH25 DUO | REBEL | LEATHER WELDING HOOD | TRANSLIGHT 355 |  |
|--------------------------|------------|-------------|----------|-------|----------------------|----------------|--|
| <b>NEW</b> Laser welding |            |             |          |       |                      |                |  |
| Moderate Welding         | ●          | ●           | ●        | ●     | ●                    | ●              |  |
| Professional Welding     |            |             |          |       |                      |                |  |
| Light Grinding           |            |             | ●        |       |                      | ●              |  |
| Heavy Grinding           |            |             |          |       |                      |                |  |

**NEW** AIRMAX HM with HALF MASK



**HALF MASK WILL FIT UNDER ANY STANDARD WELDING HELMET OR FACE SHIELD**



**CHEMICAL UPGRADE AVAILABLE**

**A1B1E1K1 P R SL**

**COMING IN 2025**



A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

6 FEET UNDER



FREEDOM



**JACKSON**<sup>®</sup>  
SAFETY

HELLFIRE



REAPERS N' ROSES



BEAD DEMON



GRAY MATTER



TRANSLIGHT  
FLIP 455



TRANSLIGHT+  
555



WH70



LP80

**NEW**

GRAPHIC WELDING  
HELMETS



**BEST**

|  | 6 FEET UNDER<br>GRAY MATTER<br>REAPERS N' ROSES | HELLFIRE<br>FREEDOM<br>BEAD DEMON | TRANSLIGHT<br>FLIP 455 | TRANSLIGHT+<br>555 | WH70 | LP80 <b>NEW</b><br>LASER WELDING<br>HELMET |
|--|---|-----------------------------------|------------------------|--------------------|------|--|
|  |   |                                   |                        |                    |      | ●  |
|  | ●   | ●                                 | ●                      | ●                  | ●    | ●  |
|  | ●   | ●                                 | ●                      | ●                  | ●    | ●  |
|  |   | ●                                 | ●                      | ●                  | ●    | ●  |
|  |   |                                   | ●                      |                    | ●    | ●  |
|  | ●   | ●                                 | ●                      | ●                  | ●    | ●  |



**WHEN USED WITH A STANDARD WELDING HELMET OR FACE SHIELD CAN BE USED AS ALTERNATIVE TO FULL PAPR SYSTEM**



**HEALTH SAFETY PRODUCTIVITY**

Finding a better way

Jackson Safety® Welding Helmets

## 280 SERIES

Traditional 'Bucket style' welding helmet

WELDING HELMETS



### LIGHTWEIGHT

Maximum comfort and safety



### EXTREMELY DURABLE

Molded from Super Tuff nylon



### VERSATILITY

Lift front with mineral glass Shade 10



### SUPER KOOL™ HIGH TEMPERATURE PAINT COATING



Made in USA



Combinable with AIRMAX+



Optimum Safety  
B Rated Impact Resistance



A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)



Jackson Safety 280 Series Welding Helmet has the traditional "Bucket Style" design that is lightweight and extremely durable. The 280 Series contains a rigid bib that deflects welding spatter making it ideal for various welding applications.

- Jackson Safety 280 Series welding helmet has been an industry leader for decades
- Made in the USA, the 280 Series is a traditional bucket style welding helmet
- Molded from **Super Tuff nylon** – lighter than fiberglass and extremely durable
- Patented **Sel-Snap lens retention system** provides easy loading of filter, cover and protective plates
- Lift front comes standard with spring loaded positive lock feature
- Our proprietary **SUPER KOOL SILVER COATING** keeps the helmet **30% cooler** than standard helmets and sheds spatter without burning
- Provides maximum operator comfort and safety
- **"Quick-release"** ratchet headgear suspension with sweatband included
- Specially designed shape for use with cartridge respirators

## TECHNICAL DATA

|                    |               |
|--------------------|---------------|
| Viewing Area       | 108 x 50,8 mm |
| Weight             | 592 g         |
| Passive Lens Shade | 10            |



TIG  
- GTAW -



MMA  
- SMAW -



PWA



MIG/MAG  
- GMAW -



## 280 SERIES

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| S28311     | 280 Series Welding Helmet with Mineral Glass Shade 10, silver - lift front                                   | 4            |
| 14311      | 280PL Welding Helmet with Mineral Glass Shade 10, silver - lift front, 370 Speed Dial Headgear - COMING 2025 |              |

## SPARE PARTS & ACCESSORIES

| Product No | Description                 | Case Qty/MOQ |
|------------|-----------------------------|--------------|
| J8302      | Protective lens 107 x 51 mm | 100          |

HEALTH SAFETY PRODUCTIVITY  
Finding a better way

Jackson Safety® Welding Helmets


## WH20 ASPIRE



Welding helmet




**EXTERNAL  
SHADE  
ADJUSTMENT**

**LIGHTWEIGHT**

Total weight 510 g  
(ADF included)

---



**COMFORT**

Adjustable ergonomic  
headgear

*A helmet that will aspire you*

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)  
Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)  
[www.surewerx.eu](http://www.surewerx.eu)

- 110 x 90 mm cartridge size, 97 x 42 mm viewing area
- Shade range 9-13
- Shade selection, sensitivity and delay adjustment
- External shade adjustment
- Adjustable ergonomic headgear
- Total weight 510 g (ADF included)



**TECHNICAL DATA**

|                               |                                    |
|-------------------------------|------------------------------------|
| <b>Viewing Area</b>           | 97 x 42 mm                         |
| <b>Optical Clarity</b>        | 1/1/1/2                            |
| <b>Weight</b>                 | 495 g                              |
| <b>Open State Shade</b>       | 4                                  |
| <b>Closed State Shade</b>     | 9-13                               |
| <b>Shade Adjustment</b>       | yes / external                     |
| <b>Sensitivity Adjustment</b> | yes / internal                     |
| <b>Delay Adjustment</b>       | yes / internal                     |
| <b>Grinding Mode</b>          | no                                 |
| <b>Switching Time</b>         | 0.3 ms                             |
| <b>Energy Supply</b>          | solar cells /<br>no battery change |



**TIG**  
- GTAW -  
> 50 Amp



**MMA**  
- SMAW -



**MIG/MAG**  
- GMAW -



**WH20 ASPIRE**

| Product No | Description   | Case Qty/MOQ |
|------------|---|--------------|
| J8049      | WH20 ASPIRE Welding Helmet with WF20 4/9-13 EXT ADF | 6            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description              | Case Qty/MOQ |
|------------|--------------------------|--------------|
| J8370      | Head gear with sweatband | 1            |
| J8319      | Outer lens 115 x 104 mm  | 100          |
| J8302      | Inner lens 107 x 51 mm   | 100          |

Jackson Safety® Welding Helmets

## WH25 DUO

Welding helmet

WELDING HELMETS

WELDING HELMET WITH  
4/9-13 ADF FOR WELDING  
AND GRINDING



**LIGHTWEIGHT**

Total weight 498 g  
(ADF included)



**AIRMAX®**

PAPR compatible

*Protect your eyes*

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

- Optical classes 1/1/1/2
- AIRMAX PAPR compatible
- 110 x 90 mm cartridge size, 92 x 41 mm viewing area
- Shade range 9-13, sensitivity and delay adjustment, grinding mode
- Total weight 498 g (ADF included)



**TECHNICAL DATA**

|                               |  |
|-------------------------------|--|
| <b>Viewing Area</b>           | 92 x 41 mm   |
| <b>Optical Clarity</b>        | 1/1/1/2  |
| <b>Hard Hat Option</b>        | no   |
| <b>Weight</b>                 | 498 g  |
| <b>Open State Shade</b>       | 4  |
| <b>Closed State Shade</b>     | 9-13   |
| <b>Shade Adjustment</b>       | yes / external                                       |
| <b>Sensitivity Adjustment</b> | yes / internal                                       |
| <b>Delay Adjustment</b>       | yes / internal                                       |
| <b>Grinding Mode</b>          | yes  |
| <b>Switching Time</b>         | 0.3 ms   |
| <b>Energy Supply</b>          | solar cells / non replaceable<br>3V Li-ion batteries |



**WH25 DUO / WH25 DUO PAPR**

| Product No | Description                             | Case Qty/MOQ |
|------------|---|--------------|
| J7101      | WH25 DUO Welding Helmet with 4/9-13 ADF | 6            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description                              | Case Qty/MOQ |
|------------|--|--------------|
| J7176      | WH25 DUO Front Cover Lens                | 10           |
| J7177      | WH25 DUO Inner Cover Lens - 94,5 x 45 mm | 10           |
| J7172      | WH25 DUO ADF Cradle                      | 1            |
| J7173      | WH25 DUO Welding - Lens Retainer         | 1            |
| J7910      | WH25 DUO Weld Helm Spacer Kit            | 1            |
| J7174      | WH25 DUO Welding Head Gear Pro           | 1            |
| J7175      | WH25 DUO Sweat Band Pro                  | 2            |
| J7180      | DUO ADF 4/9-13                           | 1            |
| J7061      | WH25 DUO PAPR Faceseal                   | 1            |
| J7060      | WH25 DUO PAPR Sweatband                  | 2            |
| J7062      | WH25 DUO PAPR Head Gear                  | 1            |

Jackson Safety® ADF Welding Mask

## REBEL™

ADF Welding/Goggle Mask - Digital

PAPR WELDING



### LIGHTWEIGHT

Maximum comfort and safety



### ONE-PIECE DESIGN

Protects against UV and IR leakage



### VERSATILITY

Fit under hard hats & over eyewear

CONVENIENT  
PUSH-BUTTON  
DIGITAL CONTROLS



The all new, exclusive Jackson Safety® Rebel™ welding mask is a great addition to our welding program, incorporating modern ADF technology. The Rebel™ is a lightweight product designed to reduce neck strain. In addition, the Rebel is designed to fit under most hard hats without the need for adaptor brackets, making it extremely versatile.

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

- New Rebel ADF masks are an ideal product for intermittent welding applications such as: automotive, fleet and agricultural equipment repairs; DIY projects; general shop applications
- Constructed with the goggle / face shield as a one piece integrated unit; eliminating spark & spatter risks to front of face
- The Rebel's soft, comfortable goggle body conforms very well to face contours, reducing UV/IR ray leakage concerns
- Specially designed to fit over most prescription eyewear – no cheater magnifying lens needed!
- Features a replaceable clear outer lens for added ADF protection (46930–5 pack)
- No adapters needed to use with hard hats
- Low TIG amp rated >10 amps
- Solar panel recharges CR 2450 replaceable battery – each battery lasts up to 1,300 hours before replacement is necessary

**TECHNICAL DATA**

**REBEL**

|                               |  |
|-------------------------------|--|
| <b>Viewing Area</b>           | 90 x 35 mm                               |
| <b>Optical Clarity</b>        | 1/1/1/2                                  |
| <b>True Color</b>             | Yes                                      |
| <b>Weight</b>                 | 250 g                                    |
| <b>Open State Shade</b>       | 3  |
| <b>Closed State Shade</b>     | 5-12                                     |
| <b>Button Controls</b>        | digital                                  |
| <b>Shade Adjustment</b>       | yes / external                           |
| <b>Sensitivity Adjustment</b> | yes / external                           |
| <b>Delay Adjustment</b>       | yes / external                           |
| <b>Grinding Mode</b>          | yes / external                           |
| <b>Switching Time</b>         | 0.1 ms                                   |
| <b>Energy Supply</b>          | Solar cells & Lithium (CR2450) Batteries |



**TIG**  
- GTAW -  
> 10 Amp



**MMA**  
- SMAW -



**PWA**




**MIG/MAG**  
- GMAW -



46200



46600

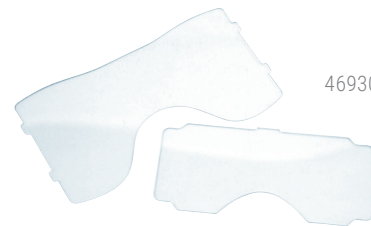

46930

**REBEL**

| Product No | Description                            | Case Qty/MOQ |
|------------|--|--------------|
| 46200      | Rebel ADF Welding Mask & FR Hood (kit) | 6            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| 46600      | Rebel Replacement FR Hood                          | 1            |
| 46930      | Rebel Replacement Lens Kit, 5 External, 3 Internal | 8            |

Jackson Safety<sup>®</sup> Welding Helmets

## LEATHER WELDING HOOD

WELDING HELMETS




Leather Welding Hood



### HEAT RESISTANT

All around protection



### BREATHABLE

Leather covering



### LIFT FRONT STYLE

Added convenience

IDEAL FOR USE IN  
OVERHEAD WELDING  
APPLICATIONS OR  
WHEN WORKING IN  
TIGHT SPACES



A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke



Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)



- Heat resistant and flexible leather design
- Tough, pliable, and breathable leather covering
- Lift front style for added convenience
- Headgear teeth automatically disengage during adjustment for speed and ease
- All around protection ideal for working in close proximity with other welders
- Ideal for use in overhead welding applications or when working in tight spaces
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards

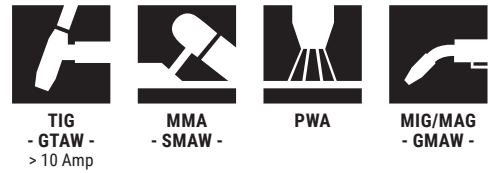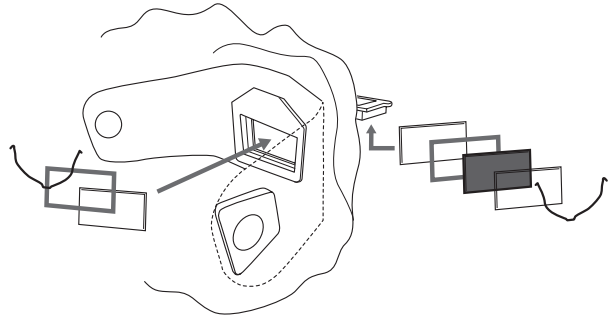

ANSI Z87.1+  
CAN/CSA Z94.3  
AS/NZS 4801

### LEATHER WELDING HOOD

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| 14531      | Leather Welding Hood – 2" x 4.25" (108 x 51 mm) Lift Front (headgear included) | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                 | Case Qty/MOQ |
|------------|-----------------------------|--------------|
| J8302      | Protective lens 107 x 51 mm | 100          |

HEALTH SAFETY PRODUCTIVITY

Finding a better way

Jackson Safety® Welding Helmets

## TRANSLIGHT™ 355

Premium Auto Darkening Welding Helmet

WELDING HELMETS

**EXCLUSIVE!**



### LIGHTWEIGHT

521 g

Welding Helmet with ADF



### EXTERNAL

### GRIND BUTTON

Quick changes between modes



### OUTER LENS

1.5 mm THICKNESS

Greater impact & heat resistance



**ULTRA SLIM  
TRUE COLOR ADF WITH  
1/1/1/1 OPTICAL RATING**

**Maximum Comfort & Fit**  
Fast & Easy  
Headgear Adjustments



**Hard Hat Compatible**



**Combinable with  
AIRMAX+**



**Optimum Safety**  
**B** Rated Impact Resistance



**TRANSLIGHT™  
SERIES**

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

- Translight 355 Series is super-lightweight with a sleek, modern design and look
- Auto Darkening Filter meets **1/1/1/1 Optical Clarity Standard**, the highest in the industry
- ADF contains external grind button for quick changes between modes
- Welding, Grinding, Cutting modes included
- Includes patented **370 Speed Dial** ratcheting headgear system
- Switching speeds of 0.25 ms
- Solar & Lithium Batteries (CR2032)
- 4 sensor technology for optimal performance
- Outer lens at 1.5 mm thickness

**TECHNICAL DATA**

**TRANSLIGHT 355**

|                               |                                    |
|-------------------------------|------------------------------------|
| <b>Viewing Area</b>           | 98 x 62 mm                         |
| <b>Optical Clarity</b>        | 1/1/1/1                            |
| <b>True Color</b>             | Yes                                |
| <b>Weight</b>                 | 521 g                              |
| <b>Open State Shade</b>       | 3                                  |
| <b>Closed State Shade</b>     | 5-14                               |
| <b>Button Controls</b>        | digital/analogue                   |
| <b>Shade Adjustment</b>       | yes / internal                     |
| <b>Sensitivity Adjustment</b> | yes / internal                     |
| <b>Delay Adjustment</b>       | yes / internal                     |
| <b>Grinding Mode</b>          | yes / external                     |
| <b>Switching Time</b>         | 0.25 ms                            |
| <b>Energy Supply</b>          | Solar & Lithium (CR2032) Batteries |



46230

**TRANSLIGHT 355**

| Product No | Description                                   | Case Qty/MOQ |
|------------|---|--------------|
| 46230      | TRANSLIGHT 355 Welding Helmet with ADF, black | 4            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description                               | Case Qty/MOQ |
|------------|---|--------------|
| 46432      | Translight 355 Replacement ADF            | 1            |
| 46914      | Translight 355 Internal Safety Plates     | 10           |
| 46923      | Translight 355/455 External Safety Plates | 10           |
| 20693      | Translight Replacement 370 Headgear       | 1            |
| 46993      | Translight 355 Lens retainer              | 1            |
| J5234      | Hard hat adaptor set                      | 1            |
| J5237      | 370 sweat band                            | 2            |

**HEALTH SAFETY PRODUCTIVITY**

Finding a better way

Jackson Safety<sup>®</sup> Welding Helmets

## TRANSLIGHT™ FLIP 455

Premium Auto Darkening Welding Helmet

WELDING HELMETS

**EXCLUSIVE!**



**FLIP-UP**

**WELDING - GRINDING**

Easy-to-use lift mechanism



**EXTRA-LARGE  
FACE SHIELD**

Superior peripheral vision



**OUTER LENS**

**1.5 mm THICKNESS**

Greater impact & heat  
resistance

**EXTRA LARGE  
FACE SHIELD FOR  
GRINDING OPERATIONS**

**Maximum Comfort & Fit**  
Fast & Easy  
Headgear Adjustments



**Hard Hat Compatible**



**Combinable with  
AIRMAX+**



**Optimum Safety**

**B** Rated Impact Resistance



**TRANSLIGHT™  
SERIES**


Jackson Safety setting NEW standards for  
*flip welding helmet design & comfort*

- Easy-to-use lift mechanism reveals a 297 sq. cm clear extra-large polycarbonate face shield for grinding operations
- Flip system ensures maximum safety – provides uninterrupted face protection when switching from welding to grinding operations
- High quality **True Color ADF** provides a full **60 square cm** viewing area
- Features an extra-large face shield which provides superior peripheral vision
- Welding, grinding, cutting modes functions are standard features
- 4 sensor technology for optimal performance
- Auto-darkening filter meets **1/1/1/1 optical clarity** standard, the highest in the industry
- Includes patented **370 Speed Dial** ratcheting headgear system
- Switching speeds of 0.1 ms
- Welding helmet with Mineral glass Shade 10 available as custom order

**TECHNICAL DATA**

**TRANSLIGHT FLIP 455**

|                               |                                    |
|-------------------------------|------------------------------------|
| <b>Viewing Area</b>           | 98 x 62 mm                         |
| <b>Optical Clarity</b>        | 1/1/1/1                            |
| <b>True Color</b>             | Yes                                |
| <b>Weight</b>                 | 725 g                              |
| <b>Open State Shade</b>       | 4                                  |
| <b>Closed State Shade</b>     | 5-8/9-13                           |
| <b>Button Controls</b>        | digital & analog                   |
| <b>Shade Adjustment</b>       | yes / internal                     |
| <b>Sensitivity Adjustment</b> | yes / internal                     |
| <b>Delay Adjustment</b>       | yes / internal                     |
| <b>Grinding Mode</b>          | yes / internal                     |
| <b>Switching Time</b>         | 0.1 ms                             |
| <b>Energy Supply</b>          | Solar & Lithium (CR2032) Batteries |

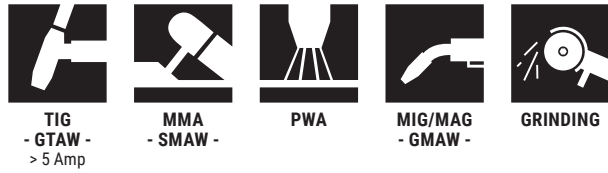

46240

**TRANSLIGHT FLIP 455**

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| 46240      | TRANSLIGHT FLIP 455 Welding Helmet with ADF, black | 4            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| 46442      | Translight 455 Replacement ADF                                 | 1            |
| 46923      | Translight 355/455 External Safety Plates (Pack of 10)         | 10           |
| 46914      | Translight 355/455 Internal Safety Plates (Pack of 10)         | 10           |
| 46640      | Translight Flip 455 Face Shield Replacement Window (Pack of 5) | 5            |
| 20693      | Translight Replacement 370 Headgear                            | 1            |
| 46991      | Translight Flip 455 Spring Replacement Mechanism Kit           | 1            |
| 46992      | Translight Flip 455 Nuts and bolts                             | 1            |
| J5234      | Hard hat adaptor set   | 1            |
| J5237      | 370 sweat band   | 2            |

Jackson Safety® Welding Helmets

## TRANSLIGHT™ + 555

Premium Auto Darkening Welding Helmet

WELDING HELMETS

**EXCLUSIVE!**



**EXTERNAL**

**SHADE ADJUSTER**

Micro adjust to eye & environment



**EXTERNAL**

**GRIND BUTTON**

Quick changes between modes



**OUTER LENS**

**1.5 mm THICKNESS**

Greater impact & heat resistance

**EXTRA LARGE VIEWING AREA**  
98 x 82 mm



**Maximum Comfort & Fit**  
Fast & Easy  
Headgear Adjustments



**Hard Hat Compatible**



**Combinable with AIRMAX+**



**Optimum Safety**

**B** Rated Impact Resistance



**TRANSLIGHT™**  
SERIES

Jackson Safety setting NEW standards for  
*large viewing area* welding helmets


The Translight™ Series is defined philosophies by our innovative global design. We mix industry leading features with new advancements in technology to transcend the welding industry.

- Translight™ shell has a sleek modern design
- Helmet is lightweight & ergonomically balanced to reduce stress & fatigue
- Auto Darkening Filter meets **1/1/1/1 Optical Clarity** standard, the highest in the industry
- Includes an external grind button, so end users can switch modes with ease
- Features the new external shade adjuster to help aid in visual focus
- The new shade adjuster can finely tune shades up to +/- 1 full shade with .2 shade adjusting increments
- Welding, Grinding and Cutting can be done with this versatile ADF
- Includes patented **370 Speed Dial** ratcheting headgear system
- Advanced digital controls are a great QOL enhancement for welders
- Switching speeds of 0.2 ms

**TECHNICAL DATA**

**TRANSLIGHT+ 555**

|                               |                                    |
|-------------------------------|------------------------------------|
| <b>Viewing Area</b>           | 98 x 82 mm                         |
| <b>Optical Clarity</b>        | 1/1/1/1                            |
| <b>True Color</b>             | yes                                |
| <b>Weight</b>                 | 612 g                              |
| <b>Open State Shade</b>       | 3                                  |
| <b>Closed State Shade</b>     | 5-8/9-14                           |
| <b>Button Controls</b>        | Digital                            |
| <b>Shade Adjustment</b>       | yes / internal                     |
| <b>Sensitivity Adjustment</b> | yes / internal                     |
| <b>Delay Adjustment</b>       | yes / internal                     |
| <b>Grinding Mode</b>          | yes / external                     |
| <b>Switching Time</b>         | 0.2 ms                             |
| <b>Energy Supply</b>          | Solar & Lithium (CR2032) Batteries |

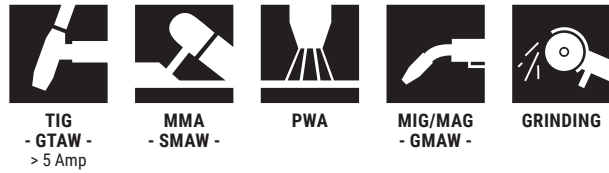

46250

**TRANSLIGHT+ 555**

| Product No | Description                                    | Case Qty/MOQ |
|------------|--|--------------|
| 46250      | TRANSLIGHT+ 555 Welding Helmet with ADF, black | 4            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description   | Case Qty/MOQ |
|------------|---|--------------|
| 46452      | Translight+ 555 Replacement ADF                     | 1            |
| 46925      | Translight+ 555 External Safety Plates (Pack of 10) | 10           |
| 46915      | Translight+ 555 Internal Safety Plates (Pack of 10) | 10           |
| 46995      | Translight+ 555 Replacement Lens Retainer           | 1            |
| 20693      | Translight Replacement 370 Headgear                 | 1            |
| J5234      | Hard hat adaptor set                                | 1            |
| J5237      | 370 sweat band                                      | 2            |
| 46996      | Translight+ 555 Darkening hood                      | 1            |

Jackson Safety® Welding Helmets

## GRAPHIC WELDING HELMETS

Premium Auto Darkening Welding Helmets

WELDING HELMETS



GRAPHIC WELDING HELMETS WILL REFLECT YOUR PERSONAL STYLE



**LIGHTWEIGHT**

Maximum comfort and safety

**370™**  
SPEED DIAL

**EASY GRIP-EASY TURN**

Fast & easy headgear adjustment



**OPTIMUM SAFETY**

**B** Rated impact resistance



Whether you are a professional welder or part time enthusiast, Jackson Safety's **new graphic style auto darkening helmets will reflect your personal style** while allowing you to perform at your best. Choose from a variety of options including **viewing size, switching speeds, shade ranges, and more**. Hallmark advantages like the **370 Speed Dial™** ratcheting headgear system, **ultra-lightweight design**, and **world class optics** are just a few of the reasons why **Jackson Safety® continues to set the standard in premium welding helmets**.

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)




## 6 FEET UNDER

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,15 ms minimizes eye-strain
- Extended front increases protection from sparks and slag
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



|                          |                        |
|--------------------------|------------------------|
| <b>Filter Dimensions</b> | 114x133mm              |
| <b>Viewing Area</b>      | 100x60mm               |
| <b>Optical Clarity</b>   | 1/1/1/1                |
| <b>Shade Range</b>       | 3/10                   |
| <b>True Color</b>        | Yes                    |
| <b>Modes</b>             | Welding                |
| <b>ADF Weight</b>        | 116g                   |
| <b>Total Weight</b>      | 571g                   |
| <b>No. of Sensors</b>    | 4                      |
| <b>TIG Rating</b>        | 20A                    |
| <b>Switching Speed</b>   | 0.15 ms                |
| <b>Warranty</b>          | 2 Years                |
| <b>Energy Supply</b>     | Solar & CR2032 battery |

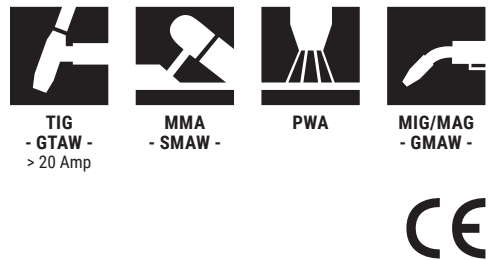

## 6 FEET UNDER

| Product No | Description                          | Case Qty/MOQ |
|------------|--------------------------------------|--------------|
| 47100      | 6 FEET UNDER, Graphic Welding Helmet | 4            |

## SPARE PARTS & ACCESSORIES

| Product No | Description                                  | Case Qty/MOQ |
|------------|--|--------------|
| 47100-1    | Replacement ADF - 6 FEET UNDER               | 1            |
| 47100-4    | External protective lens (114.3 x 133.35 mm) | 10           |
| 47105-3    | Internal protective lens (105.4 x 65.4 mm)   | 10           |
| 20696      | Headgear 370                                 | 1            |
| J5237      | Sweat Band                                   | 2            |



## FREEDOM

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,15 ms minimizes eye-strain
- Extended front increases protection from sparks and slag
- Comes complete with an internal grind mode
- Advanced digital controls provide intuitive interface
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



|                          |                            |
|--------------------------|----------------------------|
| <b>Filter Dimensions</b> | 114x133mm                  |
| <b>Viewing Area</b>      | 100x60mm                   |
| <b>Optical Clarity</b>   | 1/1/1/1                    |
| <b>Shade Range</b>       | 4/5-13                     |
| <b>True Color</b>        | Yes                        |
| <b>Modes</b>             | Grinding, Cutting, Welding |
| <b>Controls</b>          | Digital                    |
| <b>ADF Weight</b>        | 170g                       |
| <b>Total Weight</b>      | 562g                       |
| <b>No. of Sensors</b>    | 4                          |
| <b>TIG Rating</b>        | 3A                         |
| <b>Switching Speed</b>   | 0.15 ms                    |
| <b>Warranty</b>          | 2 Years                    |
| <b>Energy Supply</b>     | Solar & CR2450 battery     |



TIG  
- GTAW -  
> 2 Amp



MMA  
- SMAW -



PWA



MIG/MAG  
- GMAW -



GRINDING



## FREEDOM

| Product No | Description                     | Case Qty/MOQ |
|------------|---------------------------------|--------------|
| 47103      | FREEDOM, Graphic Welding Helmet | 4            |

## SPARE PARTS & ACCESSORIES

| Product No | Description                                  | Case Qty/MOQ |
|------------|--|--------------|
| 47103-1    | Replacement ADF - FREEDOM                    | 1            |
| 47100-4    | External protective lens (114.3 x 133.35 mm) | 10           |
| 47105-3    | Internal protective lens (105.4 x 65.4 mm)   | 10           |
| 20696      | Headgear 370                                 | 1            |
| J5237      | Sweat Band                                   | 2            |



A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

## REAPERS N' ROSES

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,2 ms minimizes eyestrain
- Extended front increases protection from sparks and slag
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



|                          |                            |
|--------------------------|----------------------------|
| <b>Filter Dimensions</b> | 114x133mm                  |
| <b>Viewing Area</b>      | 100x67mm                   |
| <b>Optical Clarity</b>   | 1/1/1/1                    |
| <b>Shade Range</b>       | 3/10                       |
| <b>Modes</b>             | Welding                    |
| <b>ADF Weight</b>        | 133g                       |
| <b>Total Weight</b>      | 571g                       |
| <b>No. of Sensors</b>    | 4                          |
| <b>TIG Rating</b>        | >2A                        |
| <b>Switching Speed</b>   | 0.2 ms                     |
| <b>Warranty</b>          | 2 Years                    |
| <b>Energy Supply</b>     | Solar & 2 CR2032 batteries |



**TIG**  
- GTAW -  
> 2 Amp



**MMA**  
- SMAW -



**PWA**



**MIG/MAG**  
- GMAW -



### REAPERS N' ROSES

| Product No | Description                              | Case Qty/MOQ |
|------------|--|--------------|
| 47104      | REAPERS N' ROSES, Graphic Welding Helmet | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                  | Case Qty/MOQ |
|------------|--|--------------|
| 47104-1    | Replacement ADF - REAPERS N' ROSES           | 1            |
| 47100-4    | External protective lens (114.3 x 133.35 mm) | 10           |
| 47104-3    | Internal protective lens (103.5 x 69.2 mm)   | 10           |
| 20696      | Headgear 370                                 | 1            |
| J5237      | Sweat Band                                   | 2            |



## HELLFIRE

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,2 ms minimizes eye-strain
- Extended front increases protection from sparks and slag
- Comes complete with an internal grind mode
- Analog controls allow quick and easy functionality
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



|                          |                            |
|--------------------------|----------------------------|
| <b>Filter Dimensions</b> | 114x133mm                  |
| <b>Viewing Area</b>      | 100x92mm                   |
| <b>Optical Clarity</b>   | 1/1/1/1                    |
| <b>Shade Range</b>       | 3/5-13                     |
| <b>Modes</b>             | Grinding, Cutting, Welding |
| <b>Controls</b>          | Analog                     |
| <b>ADF Weight</b>        | 141g                       |
| <b>Total Weight</b>      | 571g                       |
| <b>No. of Sensors</b>    | 4                          |
| <b>TIG Rating</b>        | >2A                        |
| <b>Switching Speed</b>   | 0.2 ms                     |
| <b>Warranty</b>          | 2 Years                    |
| <b>Energy Supply</b>     | Solar & 2 CR2032 batteries |



TIG  
- GTAW -  
> 2 Amp



MMA  
- SMAW -



PWA



MIG/MAG  
- GMAW -



GRINDING



### HELLFIRE

| Product No | Description                      | Case Qty/MOQ |
|------------|----------------------------------|--------------|
| 47101      | HELLFIRE, Graphic Welding Helmet | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                  | Case Qty/MOQ |
|------------|--|--------------|
| 47101-1    | Replacement ADF - HELLFIRE                   | 1            |
| 47100-4    | External protective lens (114.3 x 133.35 mm) | 10           |
| 47101-3    | Internal protective lens (103.5 x 95.5 mm)   | 10           |
| 20696      | Headgear 370                                 | 1            |
| J5237      | Sweat Band                                   | 2            |



A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke


Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)  
Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)  
[www.surewerx.eu](http://www.surewerx.eu)

## GRAY MATTER

- Lightweight and ergonomically balanced to reduce stress and fatigue
- Excellent switching speeds 0,1 ms minimizes eyestrain
- Extended front increases protection from sparks and slag
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



|                          |                        |
|--------------------------|------------------------|
| <b>Filter Dimensions</b> | 110x90mm               |
| <b>Viewing Area</b>      | 96x42mm                |
| <b>Optical Clarity</b>   | 1/1/1/1                |
| <b>Shade Range</b>       | 3/10                   |
| <b>True Color</b>        | Yes                    |
| <b>Modes</b>             | Welding                |
| <b>ADF Weight</b>        | 68g                    |
| <b>Total Weight</b>      | 453g                   |
| <b>No. of Sensors</b>    | 2                      |
| <b>TIG Rating</b>        | 30A                    |
| <b>Switching Speed</b>   | 0.1 ms                 |
| <b>Warranty</b>          | 2 Years                |
| <b>Energy Supply</b>     | Solar & CR2032 battery |

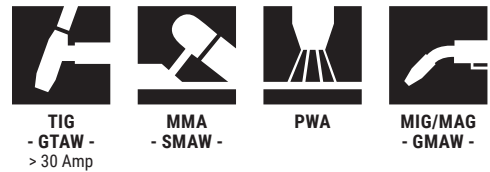

### GRAY MATTER

| Product No | Description                         | Case Qty/MOQ |
|------------|-------------------------------------|--------------|
| 47102      | GRAY MATTER, Graphic Welding Helmet | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                     | Case Qty/MOQ |
|------------|---|--------------|
| 47102-1    | Replacement ADF - GRAY MATTER                   | 1            |
| J8304      | External/Internal protective lens (110 x 90 mm) | 10           |
| 20696      | Headgear 370                                    | 1            |
| J5237      | Sweat Band                                      | 2            |



HEALTH SAFETY PRODUCTIVITY

Finding a better way

## BEAD DEMON

- Lightweight and ergonomically balanced to reduce stress and fatigue
- 4 arc sensors provide maximum eye protection and coverage
- Excellent switching speeds 0,15 ms minimizes eye-strain
- Extended front increases protection from sparks and slag
- Packaged in an attractive full-color box
- CE and UKCA certified, meets or exceeds ANSI Z87.1 and CAN/CSA Z94.3 standards



|                   |                            |
|-------------------|----------------------------|
| Filter Dimensions | 110x90mm                   |
| Viewing Area      | 100x60mm                   |
| Optical Clarity   | 1/1/1/2                    |
| Shade Range       | 4/9-13                     |
| Modes             | Grinding, Cutting, Welding |
| Controls          | Analog/Knob                |
| ADF Weight        | 141g                       |
| Total Weight      | 499g                       |
| No. of Sensors    | 4                          |
| TIG Rating        | 3A                         |
| Switching Speed   | 0.15 ms                    |
| Warranty          | 2 Years                    |
| Energy Supply     | Solar & CR2450 battery     |



TIG  
- GTAW -  
> 3 Amp



MMA  
- SMAW -



PWA



MIG/MAG  
- GMAW -



GRINDING



### BEAD DEMON

| Product No | Description                        | Case Qty/MOQ |
|------------|------------------------------------|--------------|
| 47105      | BEAD DEMON, Graphic Welding Helmet | 4            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                | Case Qty/MOQ |
|------------|--|--------------|
| 47105-1    | Replacement ADF - BEAD DEAMON              | 1            |
| J8304      | External protective lens (110 x 90 mm)     | 10           |
| 47105-3    | Internal protective lens (105.4 x 65.4 mm) | 10           |
| 20696      | Headgear 370                               | 1            |
| J5237      | Sweat Band                                 | 2            |



External grind  
mode for easy  
switching

## HEADGEAR SYSTEMS

**370™**  
SPEED DIAL

### EASY GRIP-EASY TURN

Rotation allows instant loosening and tightening of the headgear



**Large adjuster dial**  
Easy to find and grab even when wearing gloves

**PREMIUM HEADGEAR**

**ERGONOMIC**

Large, soft, and well-ventilated back rest



**Easy to adjust pin-lock upper adjustment band**

Allows proper positioning of face shield



**Extra wide replaceable fabric sweatband**

Offers high comfort and convenience



**Perfect fit every time, increasing safety, productivity and satisfaction**

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| J8570      | 375 Speed Dial Headgear - for use with WH70 welding helmets, WH70 PAPR Systems and Translight PAPR Systems | 1            |
| 20693      | 370 Speed Dial Headgear - for use with Translight welding helmets  | 1            |
| 20696      | 370 Speed Dial Headgear - for use with Graphic welding helmets   | 1            |
| 20694      | 370 Speed Dial Headgear - for use with Quad 500  | 1            |
| 20695      | 370 Speed Dial Headgear - for use with Maxview and F4XP  | 1            |
| J8572      | 370 Speed Dial Headgear - for use with Quad 500 PAPR System  | 1            |
| J8571      | 370 Speed Dial Headgear - for use with Maxview PAPR System   | 1            |
| J5237      | 370 sweat band   | 2            |
| 40593      | Premium headgear - for use with WH70 and LP80 laser welding helmets  | 1            |
| 40595      | Sweatband for premium headgear   | 2            |

Jackson Safety® Welding Helmets

## WH70

Premium Auto Darkening Welding Helmet

WELDING HELMETS



**EXTERNAL**

**GRIND BUTTON**

Quick changes between modes



**LARGE**

**VIEWING AREA**

96 x 68,5 mm



**FRONT LOADED**

**QUICK & EASY**

Protective lenses and ADFs are easily removed to be replaced or cleaned

**POSSIBLE UPGRADE:**

- HARD HAT
- MAGNIFYING LENSES



Hard Hat Compatible



Maximum Comfort & Fit  
Fast & Easy  
Headgear Adjustments



Optimum Safety

**B** Rated Impact Resistance



*Take the art of welding to its highest level*



- Aerodynamic design for better fume deflection and a smooth rounded perimeter for increased comfort
- Protective lenses and ADFs are easily removed to be replaced or cleaned
- Large viewing area 96 x 68.5 mm
- Lightweight, 399 g w/o ADF
- European designed
- All components made in EU
- A European legend!



| TECHNICAL DATA         | WF70 GDS   | WF70 GDS-E                                       |
|------------------------|--|--|
| Filter Lens            | J9927  |  |
| Viewing Area           | 96 x 68.5 mm                                     | 100 x 68 mm                                      |
| Hard Hat Option        | yes  | yes  |
| Optical Clarity        | 1/1/1/1  | 1/1/1/1  |
| Weight                 | 565 g  | 560 g  |
| Open State Shade       | 4  | 3  |
| Closed State Shade     | 6-8/9-13   | 4-8/9-13   |
| Shade Adjustment       | yes / ext  | yes / ext  |
| Sensitivity Adjustment | yes / ext  | yes / ext  |
| Delay Adjustment       | yes / ext  | yes / ext  |
| Grinding Mode          | yes / ext  | yes / ext  |
| Lock Shade Mode        | -  | yes / ext  |
| Switching Time         | 0.15 ms  | 0.1 ms   |
| Energy Supply          | Solar cells + 2x Lithium batteries - replaceable | Solar cells + 2x Lithium batteries - replaceable |

### POSSIBLE UPGRADES

- Hard hat combination (CH-300)
- Magnifying lenses 107 x 51 mm (1.0, 1.25, 1.5, 1.75, 2.0, 2.5)



### WH70

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| J9916      | WH70 Welding Helmet with Grand GDS ADF - Expiring 2025 | 1            |
| -          | WH70 Welding Helmet with Grand GDS-E ADF - Coming 2025 | 1            |
| J9913      | WH70 Replacement Shell for EXT ADF                     | 1            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                | Case Qty/MOQ |
|------------|----------------------------|--------------|
| J8570      | 375 head gear              | 1            |
| J5237      | 370 sweat band             | 2            |
| J9931      | Outer lens 147 x 125 mm    | 10           |
| J9932      | Inner lens 107.5 x 71.5 mm | 10           |
| J9934      | Washer set                 | 1            |
| J9936      | Mag lens holder            | 1            |
| J9942      | Leather neck protection    | 1            |
| J5234      | Hard hat adaptor set       | 1            |
| J5243      | Hard hat sweat band        | 2            |

NEW

Jackson Safety® Welding Helmets

**JACKSON**  
SAFETY

LASER WELDING HELMETS

# LASER WELDING HELMET

Premium Auto Darkening Laser Welding Helmet -  
For hand-guided high-power laser welding systems

MADE IN  
EUROPE

**D LB7**

LASER LIGHT  
PROTECTION LEVEL  
950-1100 nm wave length



**ADF - 1/1/1/1** Optical  
Clarity with large viewing  
area 96 x 68,5 mm



**SHADE RANGE**  
4/6-8/9-13



Excellent switching  
speeds of 0,15 ms



Weight approx. 840 g  
(total helmet)



Solar cells + 2x Lithium  
battery (batteries are  
external and exchangeable)



**NEW ERGONOMIC  
HEADGEAR**

Large, soft, and  
well-ventilated back rest



CE



**STANDARDS**  
EN 207:2017  
EN ISO 16321-1:2022  
EN 16321-2:2021



Protects face, forehead  
and ears from welding  
sparks, splashes and  
stray laser radiation



LASER



TIG  
- GTAW -



MMA  
- SMAW -



PWA



MIG/MAG  
- GMAW -



GRINDING

**LP80**  
LASER PROTECTION

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)


Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

**ALUMINIUM SHIELD**

- 1 Melting point at 600°C – materially higher than standard welding helmet 
- 2 Temperature distribution qualities prevent heat concentration build up 
- 3 Lightweight – 160g 
- 4 Greater coverage of welding helmet helps protect skin 
- 5 Aluminium is recyclable 
- 6 **DLB8** Laser Protection Level 

**LASER PROTECTION GLASS SANDWICH**

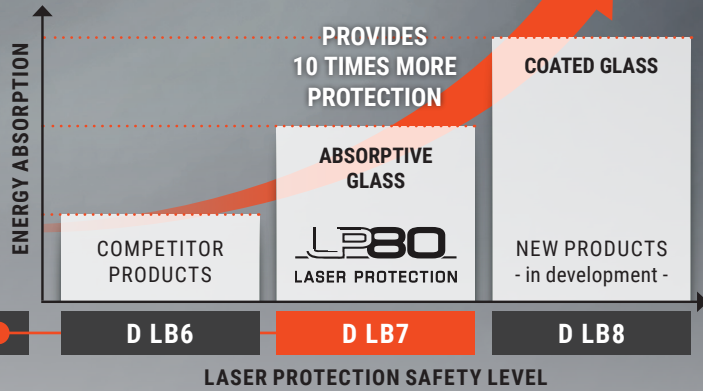

**LASER WELDING HELMET**

| Product No | Description   | Case Qty/MOQ |
|------------|---|--------------|
| 40500      | Laser Welding Helmet GDS ADF with absorptive glass laser filter, protection level D LB7 - Expiring 2025 | 1            |
| -          | Laser Welding Helmet GDS ADF with absorptive glass laser filter, protection level D LB7 - Coming 2025   | 1            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description                          | Case Qty/MOQ |
|------------|--------------------------------------|--------------|
| 40508      | Aluminium Frame Laser Welding Helmet | 1            |
| 40509      | Outer Cover Lens for Laser Helmet    | 10           |
| 40593      | Premium headgear                     | 1            |
| 40595      | Sweatband for premium headgear       | 2            |

# WELDING FILTERS

## SAFETY FIRST

### CE certified

All ADFs are CE certified and most of them **exceed required protection** levels by large margin (switching speed, UV/IR protection).

### Protection against UV and IR light

ADFs are designed so that regardless of dark or clear state welder's eyes are **always protected** against harmful UV and IR light occurring during welding process.

### Excellent switching speed

Switching speed and detection of welding arc **prevent light flash** from reaching welder's eyes.

### Safe in any weld process

Variable shade level, sensitivity and delay allow for **adjusting protection** parameters to any weld process.


## WIDE SELECTION OF PRODUCT PERFORMANCE LEVELS AVAILABLE



A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

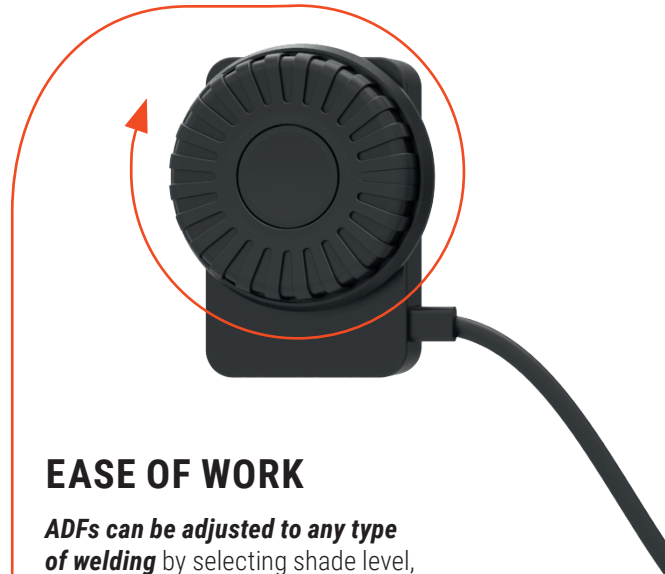

## EASE OF WORK

**ADFs can be adjusted to any type of welding** by selecting shade level, sensitivity to welding arc and opening time delay.

Selectable operation mode (Weld/Grind/Cut) allows for permanent eye protection during the whole metal processing operation.

Increased productivity as both hands can be used.

## Simple welding tasks

Mineral glass or single shade ADFs.

## Entry level welding tasks

Limited shade range, average speed and window size – cost effective.

## Professional tasks

All required features at moderate cost with added functionality.


## Extremely demanding tasks

Highest optical performance, switching speed, sensitivity range and various modes of operation.

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

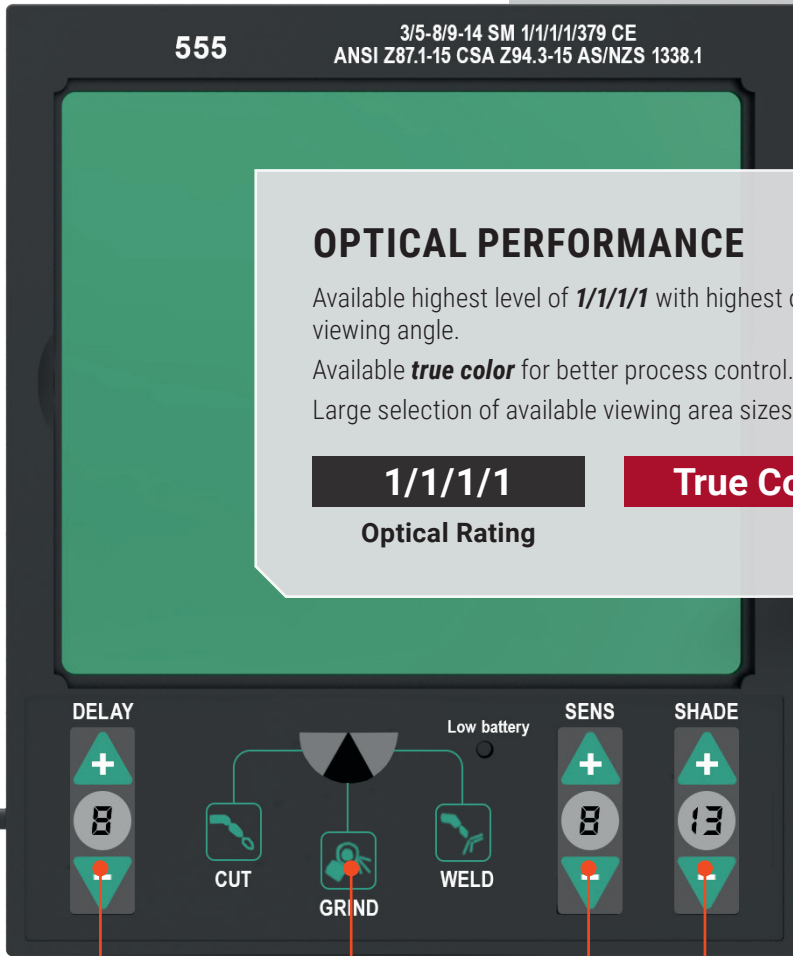

## OPTICAL PERFORMANCE

Available highest level of **1/1/1/1** with highest optical clarity, homogeneity and wide viewing angle.

Available **true color** for better process control.

Large selection of available viewing area sizes from 35 to 80 cm<sup>2</sup>.

**1/1/1/1**

Optical Rating

**True Color**

**S to XL**

Viewing Area

- **Shade level**
- **Sensitivity**
- **Operation mode**
- **Opening time delay**

## ADDITIONAL FEATURES

### Highest speed ADFs

Surface mode technology on some models.

### ADF power source selection

- **Replaceable batteries** - alkaline or lithium.
- **Fixed batteries** - No battery changes for the lifetime of the product.
- **Solar cells** for battery life extension.

### Low weight and ultraslim ADFs

Reduced weight and ultraslim ADFs available.

### Warranty

1, 2 or 3 year warranty depending on ADF model.



Jackson Safety® Welding Filters

**JACKSON**  
SAFETY

WELDING FILTERS

# RECOMMENDED SHADE LEVELS

For Various Welding Applications



Current (A)    Coated electrodes    MIG Heavy metals    MIG Light alloys    MAG    TIG    Gouging    PLASMA Cutting    PLASMA Welding

| Current (A) | Coated electrodes | MIG Heavy metals | MIG Light alloys | MAG | TIG | Gouging | PLASMA Cutting | PLASMA Welding |
|-------------|-------------------|------------------|------------------|-----|-----|---------|----------------|----------------|
| 1           |                   |                  |                  |     |     |         |                |                |
| 2.5         |                   |                  |                  |     |     |         |                | 6              |
| 5           | 6                 |                  |                  |     | 8   |         |                | 7              |
| 10          | 7                 |                  |                  |     |     |         |                | 8              |
| 20          | 8                 |                  |                  |     | 9   |         |                | 9              |
| 30          |                   |                  |                  |     | 10  |         |                | 10             |
| 40          | 9                 |                  |                  |     |     |         |                |                |
| 60          | 10                |                  |                  | 9   |     |         |                |                |
| 80          |                   |                  |                  | 10  | 11  |         | 11             | 11             |
| 100         | 11                | 10               |                  | 10  | 12  |         |                | 12             |
| 150         |                   | 11               | 11               | 11  |     | 10      |                |                |
| 175         | 12                | 12               |                  | 12  | 13  |         | 12             | 13             |
| 200         |                   | 12               | 12               | 12  |     | 11      |                |                |
| 225         | 13                | 13               |                  | 13  | 14  |         | 13             | 14             |
| 250         |                   | 13               | 13               | 13  |     | 12      |                |                |
| 300         | 14                | 14               | 14               | 14  | 15  |         |                |                |
| 350         |                   | 14               | 14               | 14  |     | 13      |                |                |
| 400         | 15                | 15               | 15               | 15  |     |         |                |                |
| 450         |                   | 15               | 15               | 15  |     | 14      |                |                |
| 500         |                   | 15               | 15               | 15  |     |         |                |                |

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)


Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

## PASSIVE WELDING FILTERS - MINERAL GLASS

- Passive welding filters are made of toughened mineral glass
- 110 x 90 mm
- Wide range of DIN shades 9, 10, 11, 12

| Product No | Description                                      | Case Qty/MOQ |
|------------|--|--------------|
| J8101      | WF10 Welding Passive Filter 110 x 90 mm Shade 9  | 200          |
| J8102      | WF10 Welding Passive Filter 110 x 90 mm Shade 10 | 200          |
| J8103      | WF10 Welding Passive Filter 110 x 90 mm Shade 11 | 200          |
| J8104      | WF10 Welding Passive Filter 110 x 90 mm Shade 12 | 200          |



Toughened mineral glass



## PC MAGNIFYING LENSES

- Designed for use with welding helmet filters
- Offers reliable protection for eyes from impact whilst offering + optics
- Available in wide range of diopters: 1.0, 1.5, 2.0, 2.5
- Special magnifying lens holder may be required



Offers reliable protection for eyes from impact whilst offering + optics



| Product No | Description                             | Case Qty/MOQ |
|------------|---|--------------|
| J2741      | Magnifying Lens 1.0 Clear (107 x 51 mm) | 6            |
| J2743      | Magnifying Lens 1.5 Clear (107 x 51 mm) | 6            |
| J2745      | Magnifying Lens 2.0 Clear (107 x 51 mm) | 6            |
| J2747      | Magnifying Lens 2.5 Clear (107 x 51 mm) | 6            |



# ADFs

WELDING FILTERS

**GOOD**

**BETTER**

**BEST**

| Filter name             | WF20 ES         | DUO             | REBEL                                  | TRANSLIGHT            |                       |                       |
|-------------------------|-----------------|-----------------|--|-----------------------|-----------------------|-----------------------|
|                         |                 |                 |  |                       |                       |                       |
| Product No              | -               | J7180           | 46200                                  | 46432                 | 46442                 | 46452                 |
| Compatible shell        | WH20 ASPIRE     | WH25 DUO        | -                                      | TRANSLIGHT 355        | TRANSLIGHT FLIP 455   | TRANSLIGHT+ 555       |
| Outer protective lens   | J8319           | J7176           | 46930<br>(Lens Kit:<br>5 Ext., 3 Int.) | 46923                 | 46923                 | 46925                 |
| Inner protective lens   | J8302           | J7177           |  | 46914                 | 46914                 | 46915                 |
| Cartridge size          | 110 x 90 mm     | 110 x 90 mm     | 108 x 51 mm                            | 110 x 90 mm           | 110 x 90 mm           | 114 x 133 mm          |
| Viewing window          | 100 x 41 mm     | 93 x 42 mm      | 90 x 35 mm                             | 98 x 62 mm            | 98 x 62 mm            | 98 x 82 mm            |
| View window sq in       | 41 sq cm        | 39 sq cm        | 31 sq cm                               | 60 sq cm              | 60 sq cm              | 80 sq cm              |
| Shade range             | 4/9-13          | 4/9-13          | 3/5-12                                 | 3/5-8/9-14            | 4/5-8/9-13            | 3/5-8/9-14            |
| Switching time RT       | 0.4 ms          | 0.3 ms          | 0.1 ms                                 | 0.25 ms               | 0.1 ms                | 0.2 ms                |
| Clearing time           | 0.2 - 0.8 s     | 0.1 - 0.8 s     | 0.2 - 0.8 s                            | 0.1 - 0.9 s           | 0.1 - 1.0 s           | 0.1 - 0.9 s           |
| Sensors                 | 2               | 2               | 2                                      | 4                     | 4                     | 4                     |
| True Color              | Yes             | Yes             | Yes                                    | Yes                   | Yes                   | Yes                   |
| Optical clarity         | 1/1/1/2         | 1/1/1/2         | 1/1/1/2                                | 1/1/1/1               | 1/1/1/1               | 1/1/1/1               |
| Shade adjustment        | ●               | ●               | ●                                      | ●                     | ●                     | ●                     |
| Sensitiviy adjustment   | ●               | ●               | ●                                      | ●                     | ●                     | ●                     |
| Delay adjsutment        | ●               | ●               | ●                                      | ●                     | ●                     | ●                     |
| Welding                 | ●               | ●               | ●                                      | ●                     | ●                     | ●                     |
| Grinding                | -               | ●               | -                                      | ●                     | ●                     | ●                     |
| Cutting                 | -               | -               | -                                      | ●                     | -                     | ●                     |
| TIG > 20 amps           | ●               | ●               | ●                                      | ●                     | ●                     | ●                     |
| TIG < 20 amps           | -               | -               | ●                                      | ●                     | ●                     | ●                     |
| Laser welding           | -               | -               | -                                      | -                     | -                     | -                     |
| Battery type            | Lithium - Fixed | Lithium - Fixed | Lithium - Replaceable                  | Lithium - Replaceable | Lithium - Replaceable | Lithium - Replaceable |
| Sollar cells            | ●               | ●               | ●                                      | ●                     | ●                     | ●                     |
| 370 Speed Dial Headgear | -               | -               | -                                      | ●                     | ●                     | ●                     |
| Special Features        | -               | -               | 4.7 mm optics                          | Thin 3.9 mm optics    | Thin 3.5 mm optics    | 4.9 mm optics         |
| Warranty                | 1 Year          | 1 Year          | 2 Years                                | 3 Years               | 3 Years               | 3 Years               |









A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)  
 Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)  
[www.surewerx.eu](http://www.surewerx.eu)



| ADFs FOR GRAPHIC WELDING HELMETS  |   |  |  |   |  | WH70  | LP80  |
|---|---|--|--|---|--|---|---|
| <br><b>6 FEET UNDER</b><br>47100-1 | <br><b>HELLFIRE</b><br>47101-1 | <br><b>GRAY MATTER</b><br>47102-1 | <br><b>FREEDOM</b><br>47103-1 | <br><b>REAPERS N' ROSES</b><br>47104-1 | <br><b>BEAD DEMON</b><br>47105-1 | <br><b>WF70 GDS</b><br>4/6-8/9-13<br>J9927 | <br><b>LP80 GDS</b><br>4/6-8/9-13<br>40504 |
| 6 FEET UNDER  | HELLFIRE  | GRAY MATTER  | FREEDOM  | REAPERS N' ROSES  | BEAD DEMON   | WH70  | LP80  |
| 47100-4   | 47100-4   | J8304  | 47100-4  | 47100-4   | J8304  | J9931   | 40509   |
| 47105-3   | 47101-3   | J8304  | 47105-3  | 47104-3   | 47105-3  | J9932   | J9932   |
| 114 x 133 mm  | 114 x 133 mm  | 110 x 90 mm  | 114 x 133 mm   | 114 x 133 jmm   | 110 x 90 mm  | 110 x 110 mm  | 110 x 110 mm  |
| 110 x 60 mm   | 100 x 92 mm   | 96 x 42 mm   | 100 x 60 mm  | 100 x 67 mm   | 100 x 60 mm  | 96 x 68.5 mm  | 96 x 68.5 mm  |
| 60 sq cm  | 92 sq cm  | 40 sq cm   | 60 sq cm   | 67 sq cm  | 60 sq cm   | 66 sq cm  | 66 sq cm  |
| 3/10  | 3/5-13  | 3/10   | 4/5-13   | 3/10  | 4/9-13   | 4/6-8 /9-13   | 4/6-8 /9-13   |
| 0.15 ms   | 0.2 ms  | 0.1 ms   | 0.15 ms  | 0.2 ms  | 0.15 ms  | 0.15 ms   | 0.15 ms   |
| 0.4 s   | 0.15 - 0.8 s  | 0.4 s  | 0.1 - 0.9 s  | 0.06 - 0.6 s  | 0.1 - 0.9 s  | 0.1 - 1.0 s   | 0.1 - 1.0 s   |
| 4   | 4   | 2  | 4  | 4   | 4  | 2   | 2   |
| Yes   | Yes   | Yes  | Yes  | Yes   | Yes  | Yes   | Yes   |
| 1/1/1/1   | 1/1/1/1   | 1/1/1/1  | 1/1/1/1  | 1/1/1/1   | 1/1/1/2  | 1/1/1/1   | 1/1/1/1   |
| -   | ●   | -  | ●  | -   | ●  | ●   | ●   |
| -   | ●   | -  | ●  | -   | ●  | ●   | ●   |
| -   | ●   | -  | ●  | -   | ●  | ●   | ●   |
| ●   | ●   | ●  | ●  | ●   | ●  | ●   | ●   |
| -   | ●   | -  | ●  | -   | ●  | ●   | ●   |
| -   | ●   | -  | ●  | -   | ●  | -   | -   |
| ●   | ●   | ●  | ●  | ●   | ●  | ●   | ●   |
| -   | ●   | -  | ●  | ●   | ●  | ●   | ●   |
| -   | -   | -  | -  | -   | -  | -   | ●   |
| Lithium - Replaceable   | Lithium - Replaceable   | Lithium - Replaceable  | Lithium - Replaceable  | Lithium - Replaceable   | Lithium - Replaceable  | Lithium - Replaceable   | Lithium - Replaceable   |
| ●   | ●   | ●  | ●  | ●   | ●  | ●   | ●   |
| ●   | ●   | ●  | ●  | ●   | ●  | ●   | ●   |
| -   | -   | -  | -  | -   | -  | Special technology to optimize clarity  | Laser welding protection  |
| 2 Years   | 2 Years   | 2 Years  | 2 Years  | 2 Years   | 2 Years  | 3 Years   | 3 Years   |

# WELDING BLANKETS

## How do I choose the right welding blanket for the job?

With so many different materials, sizes and functions, it's very difficult to decide what type of welding blanket you might need for the job. When you are unsure of the right style for you, it's good to start with some basic questions:

### What temperatures are you working with?

- **Working Temperature** – The maximum temperature a blanket can withstand for the entire duration of the application. Sometimes this is referred to as "service temperature" or "constant temperature."
- **Intermittent Temperature** – The temperature the fabric can withstand for short durations without damage.

### What should I know about different fiberglass coatings?

There are many different coatings available each with its own specific properties. Listed below are some of the most common styles:

| PU   | Fiberglass uncoated  | Vermiculite  |
|--|--|--|
| <ul style="list-style-type: none"> <li>• Enhanced abrasion and tear resistance</li> <li>• Soft to the touch</li> </ul> | <ul style="list-style-type: none"> <li>• Easy to cut and can conform to complex curves</li> <li>• Lightweight and soft material</li> </ul> | <ul style="list-style-type: none"> <li>• Advanced abrasion resistance</li> <li>• Can be used without gloves</li> </ul> |

### Which welding blankets are best for vertical and horizontal use?

Lighter duty welding blankets can be used vertically to offer protection against welding sparks and slag. If you are using a blanket horizontally or flat, it is recommended to use a heavier-duty blanket with a higher maximum temperature as the spatter has the potential to rest directly on the material.

Compliant to  
EN 13501



| Product Series | LIGHT DUTY   |   | MEDIUM DUTY                          | HEAVY DUTY  |
|----------------|--|---|--------------------------------------|---|
|                | Uncoated Fiberglass Blanket  | Fiberglass PU Coated Blanket  | Vermiculite Blanket                  | Silica Cloth Blanket  |
| Working Temp   | 550°C  | 550°C   | 1000°C                               | 1100°C  |
| Colors         | White  | Grey  | Black                                | Tan   |
| Weight         | 612g (18oz)  | 470g (14oz)   | 845g (24oz)                          | 680g (20oz)   |
| Applications   | Heat treating, low thermal conductivity, anti corrosion, and is a base material for coating, impregnating and laminating | Slag resistance, spark resistance and incidental resistant to flames from cutting torches | Abrasion resistance, thermal barrier | Used for thermal and high heat requirements; can be used at 1100°C, maximum at 1300°C |

NOTE: Temperatures and applications are intended as a guideline only and not a guarantee of performance. SureWerx recommends the use of welding blankets in multiple layers to attain proper molten metal and radiant heat protection. It is the user's responsibility to monitor the activity and use of blankets/high-heat materials at all times. The user must inspect the blankets before use. Abnormal wear and tear should be removed from service.

## UNCOATED FIBERGLASS BLANKET

- Low irritating yarns prevents itch
- Grommets allow easy hanging in vertical applications
- **550°C working temperature / 700°C maximum temperature**

| Product No | Product Type | Width | Length | Thickness | Case Qty/MOQ |
|------------|--------------|-------|--------|-----------|--------------|
| J2711      | Blanket      | 1 m   | 1 m    | 0.75 mm   | 20           |
| J2712      | Blanket      | 1 m   | 2 m    | 0.75 mm   | 10           |
| J2713      | Blanket      | 2 m   | 2 m    | 0.75 mm   | 5            |
| J2714      | Blanket      | 3 m   | 2 m    | 0.75 mm   | 5            |
| J2715      | Roll         | 1 m   | 25 m   | 0.75 mm   | 1            |



**LIGHT DUTY PROTECTION**



Ideal for welding, insulation, and jacketing applications

## FIBERGLASS PU COATED BLANKET

- Excellent abrasion and tear resistance
- Grommets allow easy hanging in vertical applications
- **550°C working temperature / 700°C maximum temperature**

| Product No | Product Type | Width | Length | Thickness | Case Qty/MOQ |
|------------|--------------|-------|--------|-----------|--------------|
| J2716      | Blanket      | 1 m   | 1 m    | 0.47 mm   | 20           |
| J2717      | Blanket      | 1 m   | 2 m    | 0.47 mm   | 10           |
| J2718      | Blanket      | 2 m   | 2 m    | 0.47 mm   | 5            |
| J2719      | Blanket      | 2 m   | 3 m    | 0.47 mm   | 5            |
| J2720      | Roll         | 1 m   | 25 m   | 0.47 mm   | 1            |



**LIGHT DUTY PROTECTION**



Provides protection from most welding sparks, spatter and slag

## VERMICULITE BLANKET

- Advanced abrasion resistant properties
- Grommets allow easy hanging in vertical applications
- **1000°C working temperature / 1300°C maximum temperature**
- Heat is dispersed evenly across the surface significantly boosting temperature rating

| Product No | Product Type | Width | Length | Thickness | Case Qty/MOQ |
|------------|--------------|-------|--------|-----------|--------------|
| J2721      | Blanket      | 1 m   | 1 m    | 1 mm      | 20           |
| J2722      | Blanket      | 2 m   | 1 m    | 1 mm      | 10           |
| J2723      | Blanket      | 2 m   | 2 m    | 1 mm      | 5            |
| J2724      | Blanket      | 3 m   | 2 m    | 1 mm      | 5            |
| J2725      | Roll         | 1 m   | 25 m   | 1 mm      | 1            |



**MEDIUM DUTY PROTECTION**



Ideal for welding, furnace applications, pipe wrapping and machinery protection

## SILICA CLOTH BLANKET

- Pliable material can easily wrap around complex curves
- Grommets allow easy hanging in vertical applications
- **1100°C working temperature / 1300°C maximum temperature**
- Protection from heavy duty slag and molten spatter

| Product No | Product Type | Width   | Length | Thickness | Case Qty/MOQ |
|------------|--------------|---------|--------|-----------|--------------|
| J2726      | Blanket      | 0.94 m  | 1 m    | 0.70 mm   | 20           |
| J2727      | Blanket      | 1 m     | 1.76 m | 0.70 mm   | 10           |
| J2728      | Blanket      | 2 m     | 1.76 m | 0.70 mm   | 5            |
| J2729      | Blanket      | 3 m     | 1.76 m | 0.70 mm   | 5            |
| J2730      | Roll         | 0.914 m | 25 m   | 0.70 mm   | 1            |



**HEAVY DUTY PROTECTION**



Ideal for use as a heat shield, furnace blanket, extreme welding applications and other thermal barrier needs

# WELDING CURTAINS

## ADVANTAGES OF TRANSPARENT WELDING CURTAINS



### UV Protection

Protects bystanders from UV and blue light radiation.



### Minimizes noise

Creates a sound barrier to minimize noise discomfort and the risk of hearing impairment for nearby workers.



### Clear division

Creates a designated space specifically for welding operations while still maintaining visibility.



### Injury prevention

Prevents sparks and spatter from injuring bystanders while self-extinguishing properties keep the curtain from burning.




### Easy installation

Curtains come grommeted, and when used with frames, are easily hung and can be rearranged.



### Reduced fumes and vapors

Creates a containment barrier that allows for more efficient fume extraction.

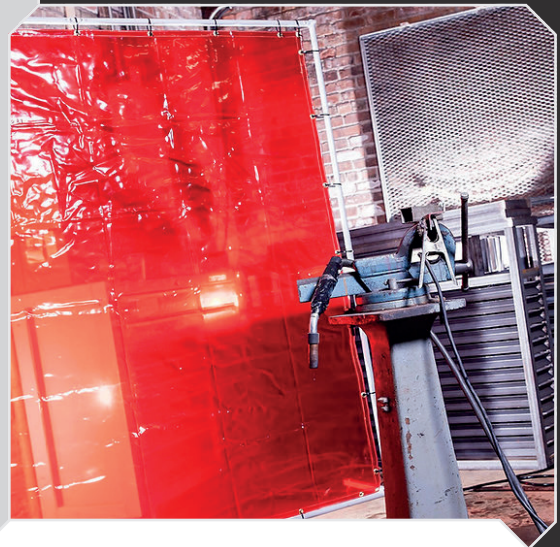

**Built with grommets for easy hanging**



**Durable material resists tearing**



**Flame, mildew, and water resistant**



**All curtains meet or exceed California Fire Marshall standards or NFPA 701 requirements for flame resistance**



**Available in orange and green 14-mil transparent material**



## Why Choose Orange?


- Puts light back into the welding area to help increase worker productivity
- Can be used around MIG, TIG, arc, and plasma operations
- Excellent for use in assembly areas



| Product No | Width      | Length     | Weight (per sq m) | Thickness | Color  | Amp Usage   | Case Qty/MOQ |
|------------|------------|------------|-------------------|-----------|--------|-------------|--------------|
| 36307      | 6' (1.8 m) | 8' (2.4 m) | 13 oz.            | .014"     | Orange | Medium-High | 12           |
| 36292      | 6' (1.8 m) | 6' (1.8 m) | 13 oz.            | .014"     | Orange | Medium-High | 12           |
| 37606      | 6' (1.8 m) | 4' (1.2 m) | 13 oz.            | .014"     | Orange | Medium-High | 12           |

## Why Choose Green?

- Decreases total light from the welding arc
- Ideal when visibility and light reduction are necessary



| Product No | Width      | Length     | Weight (per sq m) | Thickness | Color | Amp Usage   | Case Qty/MOQ |
|------------|------------|------------|-------------------|-----------|-------|-------------|--------------|
| 36315      | 6' (1.8 m) | 8' (2.4 m) | 13 oz.            | .014"     | Green | Medium-High | 12           |
| 36299      | 6' (1.8 m) | 6' (1.8 m) | 13 oz.            | .014"     | Green | Medium-High | 12           |
| 37700      | 6' (1.8 m) | 4' (1.2 m) | 13 oz.            | .014"     | Green | Medium-High | 12           |

## WELDING CURTAIN FRAME

- Bolted corner clamps for extra stability
- Pre-drilled holes for casters
- 19-gauge steel construction ideal
- Powder coated enamel finish for excellent rust and abrasion resistance for daily rigorous use
- Platform "T" legs reduce slipping and twisting of the unit



### Stur-D-Screen frames and recommended curtains

| Frame Only | Frame Size                         | Orange      | Green       |
|------------|------------------------------------|-------------|-------------|
| 36335      | 6' x 4' (1.8 x 1.2 m) Single Panel | 37606       | 37700       |
| 36336      | 6' x 6' (1.8 x 1.8 m) Single Panel | 36292       | 36299       |
| 36338      | 6' x 8' (1.8 x 2.4 m) Single Panel | 36307       | 36315       |
| 37198      | Adjustable 6' x 6' to 6' x 8'      | 36292/36307 | 36299/36315 |

| Product No | Description   | Box Count |
|------------|---|-----------|
| 36687      | Optional hooks for attaching curtains or blankets to welding frames | 10        |

# TOOLS

## CURV-O-MARK

### PIPE AND TOOL MARKING ACCESSORIES

Curv-o-mark layout tool and systems have earned a reputation for quality and consistency across a wide range of industries. Easy to use and made for an extended working life, these are tools to help bring precision to any layout task.

#### PIPE MARKERS



#### LEVELS AND FLANGE ALIGNING TOOLS

#### WRAP-A-ROUND



#### EASY TO USE

For a wide range of industries



#### DURABILITY

Extended working life



#### PRECISION

For any layout task



## PIPE MARKERS

### CENTERING HEAD – MAGNETIC FOR THOSE DIFFICULT ANGLES

- Fitted with an **adjustable dial bubble protractor**, this timeefficient mechanism can be used to locate and mark centre points on a pipe or specific angles.
- The PipePro Centring Head has been engineered with a **“Y” shaped** body design and a **2-1/2° increment degree-dial that rotates 360°’s**.
- The centre pin has been produced using **CNC manufactured Hardened and tempered Carbon Steel**.
- Magnets in the legs allow a **hands-free approach**, encouraging a safer and more accurate layout mark.

| Product No | Description                      | Case Qty/MOQ |
|------------|----------------------------------|--------------|
| J1979      | PipePro Centering head AL medium | 1            |
| J1980      | PipePro Centering head AL large  | 1            |



**Magnetic**

## LEVELS AND FLANGE ALIGNING TOOLS

### MULTI ANGLE SPIRIT LEVEL – MAGNET CLAMPING

- The PipePro Spirit Level is a lightweight, durable and multi purpose level which includes an **adjustable protractor dial** and **magnetic base** to easily determine and set up angles.
- There are **two stationery vials** placed at 90° angles of each other which can be read from any surface of the level.
- This level has a **12” ruler** along its base for easy and precise measurements.
- Magnets on the bottom of the level allow a **hands-free approach**, encouraging a safer and more accurate work environment.

| Product No | Description            | Case Qty/MOQ |
|------------|------------------------|--------------|
| J1981      | PipePro Aluminum level | 1            |



### FLANGE ALIGNMENT TOOL WITH VIAL LEVEL

- The PipePro Flange Alignment Tool is a **multifaceted pipefitting tool** used for alignment and finding/setting angles. Flange pins included.
- The Pipe Flange Aligner saves valuable fit-up time (up to 50% more efficient) while eliminating the frustration of balancing a level on the pins.
- Produced using **CNC manufactured Hardened and tempered Carbon Steel**.
- **Bubble vials** in both the pins and straight bar allow for perfect alignment.

| Product No | Description                 | Case Qty/MOQ |
|------------|-----------------------------|--------------|
| J1982      | PipePro Flange Aligner Tool | 1            |




## PIPE MARKERS

### CONTOUR MARKERS

The Contour Marker consists of an X frame, calibrated protractor, and a triple-jointed marking arm adjustable to the line to be scribed. A soapstone crayon is required for each radius marker (not supplied). Contour marker is a compact tool design, time saving tool used to lay out pipe and structural steel joints. Ideal for quick precise layout of laterals at any angle, tees, wyes, crosses, elbows - any type or size of joint (for use on same size pipe intersections). Eliminates mathematical formulas. Can be used to lay out pipe from 1-1/2" (3.8 cm) to 18" (45.7 cm) diameter or structural steel members up to 18" (45.7 cm) in a right side up or upside down position.

| EU Prod. No | US Prod. No | Description         | Pipe Diameter                           | Case Qty/ MOQ |
|-------------|-------------|---------------------|---|---------------|
| J1874       | 14771       | #1 Marker standard  | 1.5" (3.8 cm) to 18" (45.7 cm) diameter | 1             |
| J1875       | 14772       | #2 Adaptor standard | Use with #1 Contour Marker              | 1             |
| J1877       | 14773       | #4 Marker jumbo     | 8" (20.3 cm) to 48" (121.9 cm) diameter | 1             |
| J1878       | 14774       | #5 Adaptor jumbo    | Use with #4 Contour Marker              | 1             |

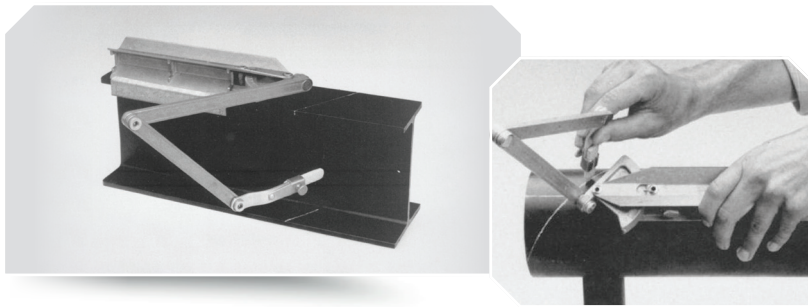

J1874



J1875



J1877



J1878

### RADIUS MARKERS

Radius Markers have sturdy friction joints to maintain rigidity and accuracy, and are made from lightweight, rustproof aluminium for extended life. A soapstone crayon is required for each radius marker. Models available in 4 sizes for scribing circles up to 80°.

| EU Prod. No | US Prod. No | Description            | Pipe Diameter                  | Case Qty/ MOQ |
|-------------|-------------|------------------------|--------------------------------|---------------|
| J1884       | 14780       | Radius marker mini     | Up to 8" (20.3 cm) in radius   | 1             |
| J1885       | 14781       | Radius marker small    | Up to 20" (50.8 cm) in radius  | 1             |
| J1886       | 14782       | Radius marker standard | Up to 24" (61 cm) in radius    | 1             |
| J1887       | 14783       | Radius marker jumbo    | Up to 40" (101.6 cm) in radius | 1             |



J1884



J1885



J1886



J1887

### CENTERING HEADS

Centering Heads aid in the settings of centerlines, establishing angles and marks for butt-ins, locating points inside pipes and tanks, laying out keyways and measuring declivity.

| EU Prod. No | US Prod. No | Description                | Pipe Diameter                          | Case Qty/ MOQ |
|-------------|-------------|----------------------------|--|---------------|
| J1879       | 14775       | #6 Centering head standard | 1/2" (1.3 cm) to 4" (10.2 cm) diameter | 1             |
| J1880       | 14776       | #7 Centering head jumbo    | 1" (2.5 cm) + diameter                 | 1             |



J1879




J1880





## PROTRACTOR

This 90-degree protractor has a matching locking lever to set and hold the tool at the desired angle. It is equipped with a 5/8 in. by 10 in. tapered arm to complete finding of angles or desired bends, or to determine any portions of elbows. The tool is mounted in a 3/4-in wide frame with a 3/8-in. by 6-in cast-in rod. It comes with a 25-pound pull magnetic base for holding the protractor frame in position. The unit can be used manually or with a magnetic base.

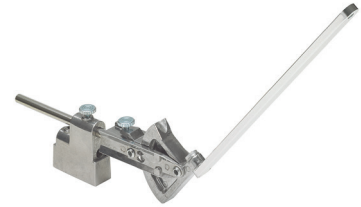

J1882

| EU Product No | US Product No | Description | Case Qty/MOQ |
|---------------|---------------|-------------|--------------|
| J1882         | 14778         | Protractor  | 1            |

## CIRCLE ECLIPSE PROJECTOR

Ideal for creating perfect circles, ellipses or oblong circles on any irregular flat or round surface. Can be used to lay out lateral intersections of different diameter pipes, or to project circles from 1-1/2" to 18" diameter on flat surfaces intersecting at angles from 0-70 degree from vertical. Features a protractor with sliding rod and an adjustable lever to lock in the specified layout. Strong, 20-pound pull magnetic base holds the Projector in position during layout. Durable web strap (included) holds the unit secure on non-magnetic surfaces and can be used on either side of the vertical column. The Projector is equipped with a soapstone crayon and also works with chalk, pencil or steel scribe.



J1888

| EU Product No | US Product No | Description              | Case Qty/MOQ |
|---------------|---------------|--------------------------|--------------|
| J1888         | 14784         | Circle eclipse projector | 1            |

## MULTI TRAMMEL HEADS

Using standard half inch pipe as a trammel bar, heads feature radius set points cast in alignment with marking pointers for easy setting. Equipped with 1/4" (0,6 cm) screws and squared on the back side of perpendicular alignment. The stationary head holds a 1/4" (0,6 cm) case hardened center point. Moveable head has a 1/8" (0,3 cm) steel scribe hardened. Marks from 1-1/2" circle to any diameter needed, depending on length of pipe used as a trammel bar. Allen wrench, soapstone, scribe and pointer also included.




J1890

| EU Prod. No | US Prod. No | Description             | Pipe Diameter | Case Qty/MOQ |
|-------------|-------------|-------------------------|---------------|--------------|
| J1890       | 14785       | #19 Multi trammel heads | All           | 1            |

## LEVELS AND FLANGE ALIGNING TOOLS

### PRO-MAG LEVEL

A lightweight, easy to use tool for determining angles. Unit is ideal for the pipe fitter, welder, jig builder or anyone who has to determine angles or do setup work. Includes two cast-in 25-pound (11.3 kg) pull magnets that hold securely to any steel surface. Unit has a 360° adjustable DSL with two 90° quadrants graduated in 2-1/2° increments. Cast in tables are used to convert degree-of-angle to rise-in-inches-per-foot or millimeters-per-meter. A groove on the bottom edge permits use on a small pipe.

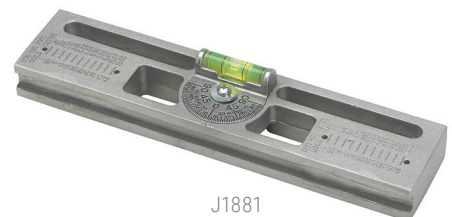


J1881

| EU Prod. No | US Prod. No | Description      | Case Qty/MOQ |
|-------------|-------------|------------------|--------------|
| J1881       | 14777       | #8 Pro-mag level | 1            |

### DIAL ANGLE FLANGE LEVEL

A versatile tool that can be used as a dial degree utility level or, with attachments, for two holding flange alignment.

| EU Prod. No | US Prod. No | Description  | Case Qty/MOQ |
|-------------|-------------|--|--------------|
| J1891       | 14786       | #20 Dual-Angle Flange Level—Nonmagnetic; can be used on PVC Pipe | 1            |

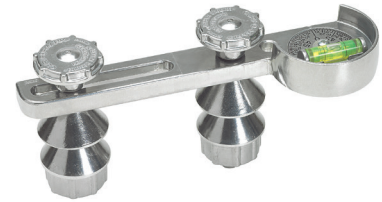

J1891

### UNIVERSAL LEVEL

Universal level is a multi-purpose tool that features a 360° adjustable protractor dial that ensures accurate leveling and permits setting a predetermined pitch of a string of pipe, setting the angle of laterals to a precise degree, trueing vertical runs & two-holding flanges. For structural steel workers, the powerful holding magnets provide an extra hand. Electricians will find the level useful in laying out and lining up heavy conduit.

| EU Prod. No | US Prod. No | Description         | Case Qty/MOQ |
|-------------|-------------|---------------------|--------------|
| J1904       | 14796       | #33 Universal Level | 1            |



J1904

### PIPE FLANGE ALIGNER

Fast, accurate pipe construction is possible with this self-determining flange aligning tool. The Aligner inserts easily into pipe, centers snugly against the inside pipe diameter and automatically aligns with the pipe axis.

| EU Prod. No | US Prod. No | Description             | Case Qty/MOQ |
|-------------|-------------|-------------------------|--------------|
| J1883       | 14779       | #10 Pipe Flange Aligner | 1            |



J1883

### UNIVERSAL LEVEL

The DSL is an adjustable bubble protractor used with a number of Curv-O-Mark Tools. The protractor covers 180 degrees through two 90 degree quadrants, reading in 2.5 degree increments. The bubble is cast in the aluminium dial.

| EU Prod. No | US Prod. No | Description                  | Pipe Diameter                | Case Qty/MOQ |
|-------------|-------------|------------------------------|------------------------------|--------------|
| J1905       | 14797       | Contour Dial-Set-Level (DSL) | Adjustable Bubble Protractor | 1            |



J1905

### FLANGE ALIGNER BASE

Removes the difficulty of flange aligning and squaring. Tool holds a square in the needed position without tying up one's hands. Base is notched at either end for ease in aligning on the center line of the pipe. Two 25-pound (11.3 kg) pull, cast-in magnets for holding either a flat horizontal or vertical position. Base accepts either leg of a standard or combination aluminum square and works on pipe diameters from 1", requiring only the extension of the legs of the square being used to accommodate larger diameters.

| EU Prod. No | US Prod. No | Description             | Case Qty/MOQ |
|-------------|-------------|-------------------------|--------------|
| J1903       | 14795       | #32 Flange Aligner Base | 1            |



J1903



## CENTERING PIN

A hardened steel pin for use with the standard centering head. Suitable for marking, but should not be used as a center punch.

| EU Prod. No | US Prod. No | Description   | Case Qty/MOQ |
|-------------|-------------|---------------|--------------|
| J1906       | 14798       | Centering pin | 1            |



J1906

## WRAP-A-ROUND

Inexpensive tools for marking straight lines around pipe; made from flexible gasket material, providing resistance to both heat and cold. All Wrap-A-Rounds are available in two colours. These designate material type and service temperature. GG (grey) material is used for high temperature applications (up to 550°F) and B (black) material is used for temperatures up to 350°F. Both material types are asbestos free.



350°F (176°C)  
BLACK

**HIGH  
TEMPERATURE**

**ASBESTOS FREE**

550°F (288°C)  
GREY




| EU Prod. No | US Prod. No | Description                    | Color | Temperature   | Size                            | Pipe Diameter                 | Case Qty/MOQ |
|-------------|-------------|--------------------------------|-------|---------------|---------------------------------|-------------------------------|--------------|
| J1858       | 14752       | Wrap-a-round 164B EX medium    | Black | 350°F (176°C) | 3.88" (9.8 cm) x 4' (1.2 m)     | 3" (7.6 cm) to 6" (15.2 cm)   | 1            |
| J1859       | 14753       | Wrap-a-round 176B large        | Black | 350°F (176°C) | 3.88" (9.8 cm) x 6' (1.8 m)     | 3" (7.6 cm) to 10" (25.4 cm)  | 1            |
| J1860       | 14754       | Wrap-a-round 177B EX large 7'  | Black | 350°F (176°C) | 5" (12.7 cm) x 7' (2.1 m)       | 4" (10.2 cm) to 12" (30.5 cm) | 1            |
| J1861       | 14756       | Wrap-a-round 179B EX large 9'  | Black | 350°F (176°C) | 5" (12.7 cm) x 9' (2.7 m)       | 6" (15.2 cm) to 16" (40.6 cm) | 1            |
| J1865       | -           | Wrap-a-round 4,5 m roll        | Black | 350°F (176°C) | 7" (17.8 cm) x 4.5 m - no print | -                             | 1            |
| J1867       | 14763       | Wrap-a-round 164GG medium      | Grey  | 550°F (288°C) | 3.88" (9.8 cm) x 4' (1.2 m)     | 3" (7.6 cm) to 6" (15.2 cm)   | 1            |
| J1869       | 14766       | Wrap-a-round 177GG EX large 7' | Grey  | 550°F (288°C) | 5" (12.7 cm) x 7' (2.1 m)       | 4" (10.2 cm) to 12" (30.5 cm) | 1            |
| J1870       | 14767       | Wrap-a-round 179GG EX large 9' | Grey  | 550°F (288°C) | 5" (12.7 cm) x 9' (2.7 m)       | 6" (15.2 cm) to 16" (40.6 cm) | 1            |

## WRAP-A-ROUND ROLLS

| Prod. No | Description                   | Color | Temperature   | Size                            | Case Qty/MOQ |
|----------|-------------------------------|-------|---------------|---------------------------------|--------------|
| J1863    | Wrap-a-round 100 meters roll* | Black | 350°F (176°C) | 5" (12,7cm) x 100 m - no print  | 1            |
| J1864    | Wrap-a-round 100 meters roll* | Black | 350°F (176°C) | 7" (17,8 cm) x 100 m - no print | 1            |

\*100 m lengths do not guarantee 100 m of wrap and there can be 5% discrepancy



NEW

# ARC FLASH PPE



## Why Oberon?

The original innovator of Arc Flash products, Oberon is dedicated to engineering, testing standards, and being American made. We can't stop and won't stop providing for our customer's safety.

## Testing

We help write ASTM and ANSI Standards. We also lead in our research, product development, laboratory testing and manufacturing processes.

## Innovation

With Oberon's "nearly clear" shield technology, you can now see all the colors of the wires you are working on.

## Made in USA

We aren't just made in the U.S., we are 100% manufactured in house. As engineers, we develop innovative electrical safety solutions.

## THE POWER OF CLARITY True Color Grey (TCG)

### What is TCG?

Struggling to safely see the wire colors while still protecting yourself from an arc?

Our **True Color Grey (TCG)** product line combats that problem. It's finally solved the biggest problem electricians face when wearing appropriate arc flash protection, **the issue of color distortion through protective shields.**

NEARLY CLEAR SHIELD



PATENTED TECHNOLOGY




ARC FLASH PROTECTION




CLEARLY DEFINE COLORS



ZERO COLOR DISTORTION

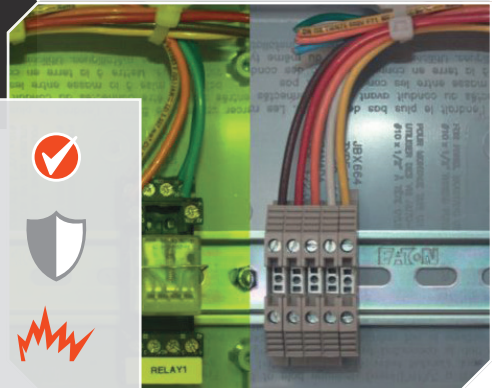

Oberon is not just a manufacturing company, we are an engineering company that develops innovative electrical safety solutions. At Oberon it is our mission to protect the welfare of the individual while adding value to a company's overall safety program.



# HEALTH SAFETY PRODUCTIVITY

Finding a better way

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)  
Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)  
[www.surewerx.eu](http://www.surewerx.eu)

**BEST**

FACE SHIELD

● ● ●

**ARC FLASH  
FACE SHIELD**  
Class 1

**NEW**



● ● ●

**ARC FLASH  
FACE SHIELD**  
AR<sub>LIM</sub> 25 cal/cm<sup>2</sup>

**NEW**



● ● ●

**ARC FLASH  
FACE SHIELD**  
AR<sub>LIM</sub> 17 cal/cm<sup>2</sup>

**NEW**



SUIT KIT



● ● ●

**75 CAL TCG™  
ARC FLASH  
SUIT KIT**  
ATPV 76 cal/cm<sup>2</sup>

**NEW**

● ● ●

**100 CAL TCG™  
ARC FLASH  
SUIT KIT**  
ATPV 100 cal/cm<sup>2</sup>

**NEW**



NEW

ARC FLASH PROTECTION

Oberon™ Arc Flash Protection



# ARC FLASH FACE SHIELD

High Performance Arc Flash Protective Face Shield Kit

- Complies with **GS-ET-29:2019-06** (Electric Arc, Box Test, Class 1 and Visible light transmittance (VLT), Class 0), **EN 166:2001** (Optical class 1, Increased robustness (S), Protection against high-speed particles (medium energy impact) (B), Resistance to surface damage by fine particles (K), Protection against short circuit electric arc (8)) and **EN 170:2002** (Protection class 2C-1.2)
- Oberon's innovative **True Colour Grey (TCG™)** arc flash face shield features a patented nearly clear technology that allows a **maximum color acuity** while performing common electrical work tasks.
- The TCG™ G1 face shield is available with an **anti-scratch** and/or **anti-fog coating** and attachment clips (available for different hard caps).
- Material: Polycarbonate
- Color: Clear Grey (TCG™)
- Thickness: 2,6 mm
- Weight: 425 g
- Made in the USA



### True Colour Grey (TCG)

- Clearly define colors -
- Zero color distortion -



### ANTI-SCRATCH COATING



| Product No         | Description  | ARC Class | Case Qty/ MOQ |
|--------------------|--|-----------|---------------|
| TCG-EU-G1-124R     | TCG Series Class 1 Arc Flash Face Shield with Ratchet Headgear                                       | 1         | 1             |
| TCG-EU-G1-126R     | TCG Series Class 1 Arc Flash Face Shield with Anti-Scratch Coating and Ratchet Headgear              | 1         | 1             |
| TCG-EU-G1-126AFR   | TCG Series Class 1 Arc Flash Face Shield with Anti-Scratch, and Antifog Coating and Ratchet Headgear | 1         | 1             |
| TCG-EU-G1-124A80   | TCG Series Class 1 Arc Flash Face A8 Adapter   | 1         | 1             |
| TCG-EU-G1-126AFA80 | TCG Series Class 1 Arc Flash Face Shield Kit with Anti-Scratch and Antifog Coating and A8 Adapter    | 1         | 1             |
| TCG-EU-G1-024      | TCG Series Class 1 Replacement Arc Flash Face Shield   | 1         | 1             |
| TCG-EU-G1-026AF    | TCG Series Class 1 Replacement Arc Flash Face Shield Kit with Anti-Scratch, and Antifog Coating      | 1         | 1             |



LARGE VIEWING AREA



PROTECTION CLASS 1



ATTACHMENT CLIPS

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)  
 Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)  
[www.surewerx.eu](http://www.surewerx.eu)

# ARC FLASH FACE SHIELD

High Performance Arc Flash Protective Face Shield Kit

- Complies with **GS-ET-29:2019-06** (Electric Arc, Box Test, Class 2 and Visible light transmittance (VLT), Class 2), **EN 166:2001** (Optical class 1, Increased robustness (S), Protection against high-speed particles (medium energy impact) (B), Resistance to surface damage by fine particles (K), Protection against short circuit electric arc (8)) and **EN 170:2002** (Protection class 2C-2)
- Oberon's innovative **True Colour Grey (TCG™)** arc flash face shield features a patented nearly clear technology that allows a **maximum color acuity** while performing common electrical work tasks.
- Kit includes TCG™ G2 shield with side shield extenders, lower chin guard **anti-scratch** and **anti-fog coating** and attachment clips (available for different caps).
- Material: Polycarbonate
- Color: Clear Grey (TCG™)
- Thickness: 2,6 mm
- Weight: 425 g
- Arc Rating (AR<sub>LIM</sub>):
  - 17 cal/cm<sup>2</sup>
  - 25 cal/cm<sup>2</sup>
- Made in the USA



**True Color Grey (TCG)**

- Clearly define colors -
- Zero color distortion -



**CE**  
0161

| Product No       | Description  | AR <sub>LIM</sub> | Case Qty/MOQ |
|------------------|--|-------------------|--------------|
| TCG-EU-G2-K      | TCG Series Class 2 Arc Flash Face Shield Kit with Anti-Scratch and Antifog Coating               | 17 cal/cm2        | 1            |
| TCG-EU-G2-KA4    | TCG Series Class 2 Arc Flash Face Shield Kit with A4 Adapter, Anti-Scratch, and Antifog Coating  | 17 cal/cm2        | 1            |
| TCG-EU-G2-KA8    | TCG Series Class 2 Arc Flash Face Shield Kit with A8 Adapter, Anti-Scratch, and Antifog Coating  | 17 cal/cm2        | 1            |
| TCG-EU-G2-KWBA   | TCG Series Class 2 Arc Flash Face Shield Kit with WBA Adapter, Anti-Scratch, and Antifog Coating | 17 cal/cm2        | 1            |
| TCG-EU-G2-K25    | TCG Series Class 2 Arc Flash Face Shield Kit with Anti-Scratch and Antifog Coating               | 25 cal/cm2        | 1            |
| TCG-EU-G2-K25A4  | TCG Series Class 2 Arc Flash Face Shield Kit with A4 Adapter, Anti-Scratch, and Antifog Coating  | 25 cal/cm2        | 1            |
| TCG-EU-G2-K25A8  | TCG Series Class 2 Arc Flash Face Shield Kit with A8 Adapter, Anti-Scratch, and Antifog Coating  | 25 cal/cm2        | 1            |
| TCG-EU-G2-K25WBA | TCG Series Class 2 Arc Flash Face Shield Kit with WBA Adapter, Anti-Scratch, and Antifog Coating | 25 cal/cm2        | 1            |



**SIDE EXTENDERS**



**CHIN GUARD**



**ATTACHMENT CLIPS**

Oberon™ Arc Flash Protection



## ARC FLASH SUIT KIT

Arc Flash Hood, Coat, and Bib Suit Kit

- Complies with **GS-ET-29:2019-06** (Electric Arc, Box Test, Class 2 and Visible light transmittance (VLT), Class 2), **EN 166:2001** (Optical class 2, Increased robustness (S)) and **EN 170:2002** Protection class 2C-2
- Complies with **IEC 61482-2:2018** against the risk of burn provoked by electrical arch of 7kA (APC=2) according to the standard EN 61482-1-2:2014
- Lightweight suit is made from a proprietary blend of arc rated, **inherently flame resistant, aramid fibers.**
- Nearly clear TCG Series hood window provides **100% true color acuity** and includes **anti-fog** and **anti-scratch** resistant coatings. Hood comes equipped with an optional ventilation system and LED light for maximum comfort and vision while working.
- Arc flash face shield is made from a durable polycarbonate for long lasting protection from harsh environments.
- Knit cuff, dual-stage zipper front closure for easy on/off.
- Adjustable waist and suspenders for a customized fit.
- Reflective day/night striping on arms and legs for increased visibility.
- Color Black
- Made in the USA



### Arc Flash Protection

Arc Rating (ATPV):  
- 76 cal/cm<sup>2</sup> or  
- 100 cal/cm<sup>2</sup>



Sizes: S-5XL

CE  
0161

### 75 CAL TCG™ ARC FLASH HOOD, COAT, AND BIB SUIT KIT (ATPV 76 cal/cm<sup>2</sup>)

| Product No | Size | Case Qty/MOQ |
|------------|------|--------------|
| TCG75B-S   | S    | 1            |
| TCG75B-M   | M    | 1            |
| TCG75B-L   | L    | 1            |
| TCG75B-XL  | XL   | 1            |
| TCG75B-2XL | 2XL  | 1            |
| TCG75B-3XL | 3XL  | 1            |
| TCG75B-4XL | 4XL  | 1            |
| TCG75B-5XL | 5XL  | 1            |

### 100 CAL TCG™ ARC FLASH HOOD, COAT, AND BIB SUIT KIT (ATPV 100 cal/cm<sup>2</sup>)

| Product No | Size | Case Qty/MOQ |
|------------|------|--------------|
| TCG6B-S    | S    | 1            |
| TCG6B-M    | M    | 1            |
| TCG6B-L    | L    | 1            |
| TCG6B-XL   | XL   | 1            |
| TCG6B-2XL  | 2XL  | 1            |
| TCG6B-3XL  | 3XL  | 1            |
| TCG6B-4XL  | 4XL  | 1            |
| TCG6B-5XL  | 5XL  | 1            |

### SPARE PARTS & ACCESSORIES

| Product No | Description                                 | Case Qty/MOQ |
|------------|---|--------------|
| HVS-4B-PM  | Fresh Air Arc Flash Hood Ventilation System | 1            |
| LED_LAMP   | Hood Mounted L.E.D. Light                   | 1            |

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)  
Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)  
[www.surewerx.eu](http://www.surewerx.eu)



**NEW**

**ARC FLASH PROTECTION**



**HEALTH SAFETY PRODUCTIVITY**  
Finding a better way

# FACE & EYE PROTECTION PPE

Used in conjunction with protective eyewear, Jackson Safety brand face shields provide a high degree of on-the-job protection for **high heat applications, grinding, flying debris, and splash protection**. We offer a wide variety of material types and lens tints for extensive coverage.

Please note: Always wear safety glasses when using face shields.

## EYEWEAR IS MANDATORY

In many workplace environments, safety eyewear is mandatory due to the range of day-to-day tasks that can cause serious injuries to the eyes. Also safety eyewear is an important part of many employees' everyday workwear.

**Safety glasses** provide protection from **dust, dirt, flying debris, and other projectiles** created when work operations involve cutting, hammering, crushing, and other related operations.

**Safety goggles** besides providing protection from **dust, dirt, flying debris, and other projectiles**, also provide protection from **splashes and burns**.

## FACE SHIELD - ANOTHER LAYER OF PROTECTION

Used in conjunction with protective eyewear, Jackson Safety® Face Shields provide a high degree of on-the-job protection for **heat applications** as well as **grinding, flying debris, splash protection, and more**.

## MATERIAL TYPES

### PET

- A low-cost, recyclable option

### Polycarbonate

- Impact performance
- Good performance against heat
- Excellent cold flexibility

## LENS TINTS

### Clear

Allows for maximum visible-light transmission.


### IRUV

Worn for applications and in environments where others are performing welding tasks such as torch brazing, torch soldering, gas welding, and oxygen cutting. Available in Shades 3.0 and 5.0.

### SPECIAL TINTS

Enhances vision and reduces glare by blocking light transmission. Available in light, medium, and dark green tints.

Selecting the right PPE to sufficiently reduce exposure to hazards is essential to work safety.



HEALTH  
SAFETY

PRODUCTIVITY

Finding a better way

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

GOOD

BETTER

BEST

FACE SHIELDS

JACKSON<sup>®</sup>  
F4XP



JACKSON<sup>®</sup>  
MAXVIEW






JACKSON<sup>®</sup>  
QUAD 500



WINDOW OPTIONS

FOR F4XP



Hard Hat Compatible



Combinable with  
AIRMAX+




GOGGLES

JACKSON<sup>®</sup>  
GPL500



SELLSTROM<sup>®</sup>  
ODYSSEY SERIES



GLASSES

JACKSON<sup>®</sup>  
SG



SELLSTROM<sup>®</sup>  
PREMIUM



Jackson Safety<sup>®</sup> Face Shields

## F4XP

Premium Face Shield Crown and Headgear

FACE PROTECTION



**370<sup>™</sup>**  
SPEED DIAL

### EASY GRIP-EASY TURN

Fast & easy  
headgear adjustment



### OPTIMUM SAFETY

PC high impact window




### MAXIMUM COMFORT

Replaceable extra absorbent  
foam cushioned sweatband




**UNIVERSAL PIN  
PATTERN WINDOW  
MOUNTING SYSTEM**  
FOR USE WITH  
MULTIPLE JACKSON  
WINDOW OPTIONS


### WINDOW OPTIONS



**B**  
TYPE  
MOLDED




**E**  
TYPE



**R**  
TYPE  
MOLDED

Jackson Safety® offers one of the most extensive universal mount face shield programs in the world! The F4XP premium face shield crown and headgear is designed for maximum comfort, productivity, and ease of use. It can be used with all universal style pin pattern windows.

- Oversized **370 Speed Dial™** ratcheting headgear guarantees a precise fit every time
- Patented **"Qwik-Fit"** swivel headband adjusts the suspension gear to the user's head for superior comfort
- Comes standard with a soft fabric sweatband for increased comfort and convenience
- Oversized crown built with premium high impact rated material for maximum protection
- (14262) F4XP Kit features premium 20 x 38.75 x 0.015 cm molded B type polycarbonate window (29087)
- Exclusive quick-change install and removal system ensures fast and efficient window changes
- **Speed Dial 370™** headgear offers the fastest, easiest, and most efficient ratcheting headgear system in the industry



#### WINDOW DIMENSIONS

8 x  
15.5 x  
.06 (inch)

20,3 x  
39,4 x  
0,15 (cm)

## WINDOW OPTIONS

### R type, molded, V8B

### B type, molded

### E type, stamped



Clear



Shade 3



Shade 5



Clear



Clear

Please note: Always wear safety glasses when using face shields.



### F4XP

| Product No | Description   | Case Qty/MOQ |
|------------|---|--------------|
| 14260      | F4XP Crown & 370 Speed Dial Headgear only                       | 1            |
| 14262      | F4XP Premium Face Shield (crown, headgear, 29087 window B type) | 6            |

### SPARE PARTS & ACCESSORIES

| Product No | Description   | Case Qty/MOQ |
|------------|---|--------------|
| 29057      | Face Shield PC window, R type, molded, clear, V8B   | 12           |
| 29058      | Face Shield PC window, R type, molded, Shade 3, V8B | 12           |
| 29059      | Face Shield PC window, R type, molded, Shade 5, V8B | 12           |
| 29087      | Face Shield PC window, B type, molded, clear        | 12           |
| 30706      | Face Shield PC window, E type, stamped, clear       | 36           |
| 20695      | 370 Speed Dial™ Replacement Headgear                | 1            |
| J5237      | 370 sweat band                                      | 2            |
| 38424      | Hard Hat Interchange System - for F4XP and Maxview  | 1            |

Jackson Safety® Face Shields

## MAXVIEW™

Premium Face Shield

FACE PROTECTION

**EXCLUSIVE!**



### CLEAR VISION

Premium Anti-Fog Coating

**370™**  
SPEED DIAL


### MAXIMUM COMFORT

Fast & Easy Headgear Adjustments



### OPTIMUM SAFETY

High Impact Polycarbonate Window



**INDUSTRY-LEADING PANORAMIC VIEW**

Hard Hat Compatible



Combinable with AIRMAX+



The MAXVIEW™ is a premium face shield that features an oversized window to deliver exceptional optical clarity and an industry-leading panoramic view. A built-in side and chin guard protects against splash and flying debris while the extended crown keeps you protected from overhead hazards.

- The Maxview is designed to offer maximum face protection coverage, incorporating an extra-large clear polycarbonate window that is available in two options: without anti-fog treatment or with our premium anti-fog coating
- Extended top-of-head coverage protects against hazards from above
- Built-in side and chin guard protects against splash and flying debris
- Lightweight and balanced construction for all-day comfort
- Up and down detents lock securely in place until manually adjusted
- The high-impact PC window is then framed on the side and chin areas and features an extra-large crown
- This combination translates into maximum coverage, head to lower neck, and side to side. In fact, Maxview offers a full 1" of extra window protection on each side (2" total) versus the leading face shield model, ensuring best-in-class protection and exceptional panoramic views. Check and compare!
- Given its amazing coverage and viewing area, the Maxview is incredibly light
- Maxview incorporates engineered detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses
- Premium **370 Speed Dial™** ratcheting headgear suspension - The 370 Speed Dial™ is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly, easily, and conveniently—saves time, increases productivity, and improves worker safety!



**WINDOW DIMENSIONS**

9.06 x  
13.38 x  
.04 (inch)

---

23 x  
33,8 x  
0,1 (cm)



14200



Please note: Always wear safety glasses when using face shields.

**MAXVIEW**

| Product No | Description                                 | Case Qty/MOQ |
|------------|---|--------------|
| 14200      | Maxview Premium Faceshield                  | 4            |
| 14201      | Maxview Premium Faceshield anti-fog coating | 4            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| 14214      | Clear replacement window                           | 36           |
| 14215      | Clear replacement window anti-fog                  | 36           |
| 20695      | 370 Speed Dial™ Replacement Headgear               | 1            |
| J5237      | 370 sweat band                                     | 2            |
| 38424      | Hard Hat Interchange System - for F4XP and Maxview | 1            |

Jackson Safety® Face Shields

## QUAD 500™

Premium Multi-Purpose Face Shield

FACE PROTECTION

**EXCLUSIVE!**



### CLEAR VISION

Premium Anti-Fog Coating

**370™**  
SPEED DIAL

### MAXIMUM COMFORT

Fast & Easy Headgear Adjustments



### VERSATILITY

Shade 5 or 8 IR Flip Windows



### PREMIUM MULTI-PURPOSE FACE SHIELD

Hard Hat Compatible



Combinable with AIRMAX+



Optimum Safety  
High Impact Polycarbonate Window



The QUAD 500™ is a premium multi-purpose face shield that offers an unparalleled range of face and eye protection solutions. Designed for maximum above-the-neck protection, this product is excellent for heavy-duty grinding, while optional Shade 5 and 8 visors make it ideal for plasma cutting and oxy/acetylene cutting, brazing, and much more.



- All Quad 500 products have been designed to offer maximum above-the-neck face protection, including an extra-large molded polycarbonate window featuring our premium anti-fog coating
- For added protection, the molded window is completely framed on the sides and chin and features an extra-large crown
- The Quad 500 offers exceptional panoramic views with virtually no distortion
- Ideal for grinding, cutting, oxy/acetylene cutting, plasma cutting, brazing and more
- Engineered detents lock in the up or down position until manually adjusted
- Premium **370 Speed Dial™** ratcheting headgear suspension - The 370 Speed Dial™ is highlighted by Jackson's famous "Easy Grab-Easy Turn" oversized adjusting dial and patented swivel adjuster band, achieving maximum comfort and fit quickly, easily, and conveniently—saves time, increases productivity, and improves worker safety!



14220

**WINDOW DIMENSIONS**

9 x  
12.125 x  
.06 (inch)

---

22,8 x  
30,8 x  
0,15 (cm)

Available with optional flip-up/flip-down extra-large IR window

- The Quad 500 face shield is also available with an exclusive, **extra-large flip-up/flip-down IR window** for added eye protection when used in applications producing infrared hazards
- It's easy and safe—by keeping the Quad 500 clear window in the down position at all times, the operator can flip the IR shaded window up or down, providing uninterrupted face protection during cutting and grinding operations
- Flip windows available in:
  - **Shade 5 IR** for oxy/acetylene cutting, brazing, and plasma cutting
  - **Shade 8 IR** for oxy/acetylene welding and plasma cutting
- Both the clear and flip windows feature detents that lock in both the up and down positions
- Designed to be used with most goggles, respirators, and all safety glasses



14230

**FLIP VISOR DIMENSIONS**

4.375 x  
9.25 x  
.07 (inch)

---

11 x  
23,5 x  
0,18 (cm)

Please note: Always wear safety glasses when using face shields.



**QUAD 500**

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| 14220      | Quad 500 Premium Multi-Purpose Face Shield                       | 4            |
| 14230      | Quad 500 Premium Multi-Purpose Face Shield Flip Visor Shade 5 IR | 4            |
| 14233      | Quad 500 Premium Multi-Purpose Face Shield Flip Visor Shade 8 IR | 4            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description                                 | Case Qty/MOQ |
|------------|---|--------------|
| 14250      | 21.8 x 20.9 x 0.15 cm clear anti-fog window | 12           |
| 14255      | 10.94 x 23.12 x 0.017 cm Shade 5 IR visor   | 12           |
| 14258      | 10.94 x 23.12 x 0.017 cm Shade 8 IR visor   | 12           |
| 20694      | 370 Speed Dial™ Replacement Headgear        | 1            |
| J5237      | 370 sweat band                              | 2            |
| 38423      | Hard Hat Interchange System - for Quad 500  | 1            |

Jackson Safety® Safety Goggles

## GPL500

Premium Goggle / Face Shield

EYE & FACE PROTECTION



**DETACHABLE  
FACE SHIELD**



**99.9% UV PROTECTION  
SUPERIOR SAFETY**



**ULTRA-SOFT BODY  
MAXIMUM COMFORT**

**FLIP-UP/FLIP-DOWN  
POLYCARBONATE FACE  
SHIELD DELIVERS  
ADDED PROTECTION  
FROM SPLASH, DUST,  
AND FLYING DEBRIS**



The GPL500 premium safety goggle with flip-up detachable face shield features an ultra-soft body design that easily conforms to your face to deliver a snug, yet comfortable seal. Indirect vents protect against chemical splash while anti-fog coating provides superior optical quality and keeps work uninterrupted.

- Flip-up/flip-down polycarbonate face shield delivers added protection from splash, dust, and flying debris
- Face shield is easily detachable
- Provides 99.9% UV protection
- Specially designed to fit over prescription eyewear
- Clear version is ideal for industrial, mining, construction, pressure washing, grinding and more
- Shade 3 and 5 IR are ideal for oxy/acetylene cutting, brazing, and plasma cutting operations



21000 Clear



21001 Shade 3



21002 Shade 5



**GPL500**

| Product No | Description                                 | Case Qty/MOQ |
|------------|---|--------------|
| 21000      | GPL500 Goggles, Blue, Clear, anti-fog       | 6            |
| 21001      | GPL530 Goggles, Green, Shade 3 IR, anti-fog | 6            |
| 21002      | GPL550 Goggles, Green, Shade 5 IR, anti-fog | 6            |

Sellstrom® Safety Goggles

## ODYSSEY II

Premium Safety Goggle

EYE PROTECTION



### EXCEPTIONAL PANORAMIC VIEWS

Dual lens models offer Anti-Fog treatment on inside lens – Anti-Scratch on outside lens



Soft goggle body conforms to your face for all day comfort



Specially designed to fit over prescription eyewear



Ventilation space minimizes fogging



### OPTIMUM SAFETY

**B** Rated impact resistance

**N** Rated resistance to fogging of oculars (except S80231 & S80210)

- The Odyssey II premium goggle series has been a market leader for 15+ years
- Unique "Dual Sealed" UV absorbing polycarbonate lens technology (except single lens Clean Room and Shade 5 cutting models)
- Dual lens models offer Anti-Fog treatment on inside lens- Anti-Scratch on outside lens
- Industrial, Chemical Splash and Shade 5 models feature top and bottom Indirect Vents providing superior ventilation and the safest operator conditions
- 100% fog free, even in the worst conditions
- Stylish soft goggle body conforms to your face, providing a comfortable yet snug seal and maximum protection against liquids and dust
- Exceptional panoramic views
- Specially designed to fit over prescription eyewear
- Simply the best goggle in the market



## Odyssey II Series Industrial Dual Lens Model

- Our most popular Odyssey II model
- Ideal for a wide variety of applications including construction sites, shop use and general industrial work-place protection
- Complete with extra wide flame retardant cloth strap

| Product No | Body Color | Vent Type | Lens | Coatings | Tint  | Case Qty/ MOQ |
|------------|------------|-----------|------|----------|-------|---------------|
| S80200     | Blue       | Indirect  | Dual | HC/AF    | Clear | 10            |



S80200

## Odyssey II Series Chemical Splash Dual Lens Goggle

- Specifically designed for those applications where the risk of a chemical splash exists
- Complete with extra wide grey, latex free neoprene strap

| Product No | Body Color | Vent Type | Lens | Coatings | Tint  | Case Qty/ MOQ |
|------------|------------|-----------|------|----------|-------|---------------|
| S80201     | Blue       | Indirect  | Dual | HC/AF    | Clear | 10            |



S80201

## Odyssey II Series Clean Room Goggle

- Specifically designed for clean room applications
- Unlike traditional, single use clean room goggles, these premium goggles are re-usable and designed for multi-use clean room applications
- Can be autoclaved
- Top-Vented body with clear uncoated lens
- Complete with extra wide grey, latex free neoprene strap

| Product No | Body Color | Vent Type  | Lens   | Coatings | Tint  | Case Qty/ MOQ |
|------------|------------|------------|--------|----------|-------|---------------|
| S80231     | Blue       | Top-Vented | Single | Uncoated | Clear | 10            |



S80231

## Odyssey II Series Shade 5 Cutting Goggle

- Features a durable Shade 5 IR (single) lens
- Specifically designed for grinding, chipping and brazing operations in fabrication and welding shop applications
- Complete with extra wide flame retardant strap

| Product No | Body Color           | Vent Type | Lens   | Coatings | Tint       | Case Qty/ MOQ |
|------------|----------------------|-----------|--------|----------|------------|---------------|
| S80210     | Black<br>(high temp) | Indirect  | Single | Uncoated | Shade 5 IR | 10            |



S80210

**A SELLSTROM EXCLUSIVE!**



**HEALTH SAFETY PRODUCTIVITY**  
Finding a better way

Jackson Safety<sup>®</sup> Safety Glasses

## JACKSON SG

Premium Protective Eyewear

EYE PROTECTION



### READY-TO-USE

All standard packs of 12 come with an attractive ready-to-use retail dispenser box



### WRAPAROUND STYLE LENSES

Extend protection to the periphery

### OUTSTANDING FRAME DURABILITY



Variety of styles available for maximum safety and productivity



Soft nose piece offers superior comfort



Provides 99.9% U.V. protection



All models come complete with a convenient neck cord to prevent loss



The Jackson<sup>®</sup> SG series is the only genuine safety eyewear product available under the Jackson Safety<sup>®</sup> brand. Designed with the wearer in mind, this premium product offers outstanding comfort, fit, style, and durability. Available in a variety of frames and lenses, the Jackson<sup>®</sup> SG family of products is the clear choice in eye protection.

- Specially designed to offer maximum eye coverage and protection, incorporating a variety of lens shades and coatings
- Made with premium virgin polycarbonate high impact, optically correct wrap style lenses, providing 99.9% UV protection
- Soft temples are curved inwards from front to back to ensure a super comfortable, slip-resistant fit
- As an added advantage, the temple tips are extremely flexible, further ensuring a snug fit while relieving any undue pressure to the user—these glasses are extremely comfortable and stay on during use!
- Frames have been developed using a specially formulated ultra-flexible, ultra-strong base material that provides incredible durability, significantly reducing breakage—check and compare!

| Product No | Frame Color | Lens Design  | Lens Description                                | Lens Coating | Work Environment | Case Qty/MOQ |
|------------|-------------|--------------|---|--------------|------------------|--------------|
| 50000      | Black       | Clear        | Maximum visible light                           | Anti-scratch | Indoor/General   | 12/Box       |
| 50001      | Black       | Clear        | Maximum visible light                           | Anti-fog     | Indoor           | 12/Box       |
| 50002      | Black       | Amber        | Ideal for low lit working environments          | Anti-scratch | Low Light        | 12/Box       |
| 50003      | Black       | Amber        | Ideal for low lit working environments          | Anti-fog     | Low Light        | 12/Box       |
| 50004      | Black       | I/O          | Reduces glare without distorting original color | Anti-scratch | Indoor/Outdoor   | 12/Box       |
| 50005      | Black       | Blue Shield  | Ideal for bright outdoor conditions             | Anti-scratch | Outdoor          | 12/Box       |
| 50006      | Black       | Smoke Mirror | Smoke tinted with outer mirror finish coating   | Anti-scratch | Outdoor          | 12/Box       |
| 50007      | Black       | Smoke Mirror | Smoke tinted with outer mirror finish coating   | Anti-fog     | Outdoor          | 12/Box       |
| 50009      | Black       | Blue Mirror  | Smoke tinted with outer blue mirror finish      | Anti-scratch | Outdoor          | 12/Box       |

## JACKSON® SG IR

### INFRARED PROTECTION

| Product No | Frame Color | Lens Design | Lens Description                           | Work Environment       | Case Qty/MOQ |
|------------|-------------|-------------|--|------------------------|--------------|
| 50008      | Black       | IR 3.0      | Protects against infrared and UV radiation | Light cutting/brazing  | 12/Box       |
| 50010      | Black       | IR 5.0      | Protects against infrared and UV radiation | Medium cutting/brazing | 12/Box       |

## JACKSON® SG

### READERS

| Product No | Frame Color | Lens Design | Reader Strength | Lens Description      | Work Environment | Case Qty |
|------------|-------------|-------------|-----------------|-----------------------|------------------|----------|
| 50040      | Black       | Clear       | 1.5             | Maximum visible light | Indoor/General   | 12/Box   |
| 50041      | Black       | Clear       | 2               | Maximum visible light | Indoor/General   | 12/Box   |
| 50042      | Black       | Clear       | 2.5             | Maximum visible light | Indoor/General   | 12/Box   |

### SPARE PARTS & ACCESSORIES

| Product No | Description  | Case Qty/MOQ |
|------------|--|--------------|
| 50099      | JACKSON Microfiber bag for Safety Glasses 120x200 mm | 50           |



50000/50001



50002/50003



50004



50005



50006/50007



50009



50008



50010



50040/50041/50042



Sellstrom® Safety Glasses

## XP410, XP450, XP460

Safety Glasses - Premium Series

EYE PROTECTION



**CLEAR VISION  
WITH PREMIUM VIRGIN  
POLYCARBONATE HIGH  
IMPACT LENSES**



**Sleek, modern co-molded  
temples offer outstanding  
style and comfort**



**Soft nose piece for  
added comfort**



**Two piece  
polycarbonate lens**



**Ventilation space  
minimizes fogging**



**EXCLUSIVE  
Sta-Clear™**

**ANTI-FOG/  
ANTI-SCRATCH**

**Washable lens treatment**

**K** **Rated resistance  
to surface damage  
by fine particles**

**N** **Rated resistance  
to fogging of oculars**

- Sellstrom offers a wide range of super premium, high quality safety glasses
- Rich in style, comfort, fit and safety
- Each model has been designed to exceed the needs of the most demanding user
- Made with premium virgin polycarbonate high impact lenses
- Lenses are specially coated with Sellstrom's premium Sta-Clear™ Anti-Fog/Anti-Scratch washable lens treatment for maximum performance, durability and life
- Virtually 100% fog free for optimum operator safety
- Provide 99.9% UV protection

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)



## XP410 Safety Glasses

- The XP410 offers feather light frames, great style, maximum comfort & fit
- So light, you won't even remember you have them on!
- High impact optically correct wrap style unitary PC lens offers superior coverage
- Stylish, ultra-thin black/green co-molded temples
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal
- Soft, co-molded above-the-eye band provides superior eye coverage
- Soft, co-molded nose piece with flexible fingers ensures maximum comfort

| Product No | Temple Color | Lens Tint | Lens Coating     | Case Qty/MOQ |
|------------|--------------|-----------|------------------|--------------|
| S72000     | Black/Green  | Clear     | Sta-Clear™ HC/AF | 12/Box       |
| S72001     | Black/Green  | Smoke     | Sta-Clear™ HC/AF | 12/Box       |



S72000



S72001

## XP450 Safety Glasses

- The XP450 is our sportiest looking safety glass
- Edgy, sleek and modern co-molded temples offer outstanding style and comfort
- High impact optically correct wrap style two-piece PC lenses offer superior coverage
- Lenses are mounted to the frame with a ventilation space, minimizing fogging
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal
- Soft nose piece offers all day comfort

| Product No | Temple Color | Lens Tint | Lens Coating     | Case Qty/MOQ |
|------------|--------------|-----------|------------------|--------------|
| S72300     | Black/Red    | Clear     | Sta-Clear™ HC/AF | 12/Box       |
| S72301     | Black/Red    | Smoke     | Sta-Clear™ HC/AF | 12/Box       |



S72300



S72301

## XP460 Safety Glasses

- The XP460 offers a sporty, stylish heavy duty frame and temple design
- Our only full frame premium safety glass
- High impact optically correct two-piece PC lenses offer superior coverage
- Stylish black/green co-molded temples & soft nose piece offers all day comfort
- Temples are curved inwards to ensure comfortable, slip-resistant fit
- Temple tips are curved outwards for gentle placement and removal

| Product No | Temple Color | Lens Tint | Lens Coating     | Case Qty/MOQ |
|------------|--------------|-----------|------------------|--------------|
| S72400     | Black/Green  | Clear     | Sta-Clear™ HC/AF | 12/Box       |
| S72401     | Black/Green  | Smoke     | Sta-Clear™ HC/AF | 12/Box       |



S72400



S72401



# GENERAL PPE

## BE AWARE OF YOUR SURROUNDINGS

Making the workplace safe is everyone's responsibility, so make sure that you check your work area and remove all potential hazards before starting.

This small step can ensure you have a productive day at work and arrive home in the same condition that you went to work.

## PPE IS THERE TO SAVE YOUR LIFE – USE IT.

It is essential that you wear the correct PPE for the job application. The fit, comfort, colour and certification of the product needs to be right to enable you to deliver your best work. Check them all before you start.

Our livelihoods depend on us doing our best work. The best work is only achieved when your health and safety is guaranteed.

*Your first line of defense:*

**FALL PROTECTION**

**HEAD PROTECTION**

**HEARING PROTECTION**

**KNEE & ELBOW PROTECTION**

**SLIP PROTECTION**



Work is something we all do. The quality of work with safety and health is a basic part of a safety culture. Building a culture that lasts 365 days a year is our goal.

### Fall Protection



Fall Safe® continues to lead through innovation, with the sole purpose of keeping workers safe and protecting the lives of countless professionals working at heights around the globe.

### Hard Hats



Jackson Safety hard hat is your first line of defense against potential head injuries. Engineered to deliver superior performance, comfort and style.

### Earplugs



Choose from a wide variety of hearing conservation solutions in both disposable and reusable ear plugs.

### Knee & Elbow Pads



Excellent for welders, ship builders, roofers, construction workers, flooring installers and anywhere hard working Knee & Elbow Pads are required.

### Traction Aids



The solution that gives you the utmost confidence on ice and snow. Ice Diamond™ Tungsten Carbide Spikes provide powerful traction with maximum grip.



## HEALTH SAFETY

## PRODUCTIVITY

## Finding a better way

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

**GOOD**

**BETTER**

**BEST**

HEAD PROTECTION

● ● ●  
**HARD HAT**



● ● ●  
**FALL PROTECTION**



Visit [fallsafe-online.com/](http://fallsafe-online.com/)

HEARING PROTECTION



● ● ●  
**H10 EARPLUGS**  
DISPOSABLE

● ● ●  
**H20 EARPLUGS**  
REUSABLE



KNEE & ELBOW PROTECTION

● ● ●  
**ELBOW PADS**  
STANDARD



● ● ●  
**KNEE PADS**  
STANDARD



● ● ●  
**KNEE PADS**  
GEL



SLIP PROTECTION

**K1 MID-SOLE**



● ● ●  
**TRACTION AIDS**

**K1 SG1**



**DUE NORTH GRIP PRO**



**DUE NORTH HEEL TRACTION AIDS**



**DUE NORTH LIGHT INDUSTRIAL**



**DUE NORTH ALL PURPOSE INDUSTRIAL**



**DUE NORTH HEAVY DUTY**



NEW

# FALL PROTECTION PPE ...



FALL PROTECTION



A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

# QUALITY. EFFICIENCY. COMFORT. SOCIAL AWARENESS

First, we investigate. We navigate through our customer daily needs. We meet and we discuss. Then we start creating. We design our products, we use human forces along with technological forces to create unique solutions. Then we explore the market and we look for premium raw material. We transform our ideas on real products. We manufacture them and test them exhaustively. When we are 100% sure of every part of that product we start the certification process.

## Innovative technology

We create our products using innovative technology and the experience and passion of a multidisciplinary team.

## Design with quality


Our production is based in the quality of our raw material, the sustainability of our processes and the safety of our clients.

## Dedicated support

We're committed to ensure that our products and services meet your expectations and we are always available to hear your feedback!

FALL SAFE® is a synonym for highest-quality. Our customers expect it, and we go out of our way to deliver it. This includes not only how we develop our products, but also how we test them. Our exhaustive battery of tests ensure our products exceed: EN – European standards; ANSI/OSHA – American standards; CSA – Canadian standards.

For more information visit:  
[fallsafe-online.com/](https://fallsafe-online.com/)

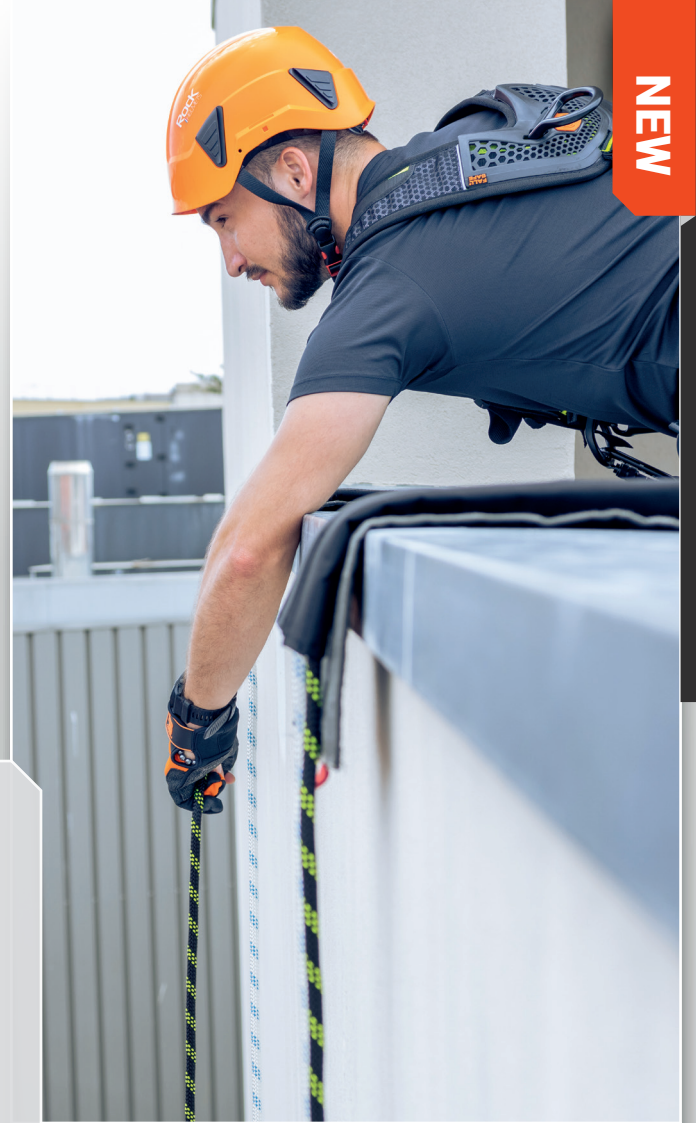

NEW

FALL PROTECTION



HEALTH SAFETY PRODUCTIVITY  
Finding a better way

Jackson Safety® Hard Hats

## CH-300

“Climbing-Inspired” Industrial Hard Hat - Non-Vented

HEAD PROTECTION



### RAPID-DIAL RATCHET KNOB

Adjusts quickly - even with gloves on!



### ALL-DAY COMFORT

6 point suspension & integrated center dome



### OPTIMUM SAFETY

Meets European standard EN 397



### “CLIMBING-INSPIRED” INDUSTRIAL HARD HAT

Comes standard with convenient built-in chinstrap and cup

Four external clips stabilize headlamp straps

Compatible with face shield & welding helmets

Ideal for at height and scaffolding work, confined space applications, construction sites requiring chin straps, and general all-around head protection.

- Introducing Jackson’s new ultra-modern “Climbing-Inspired” industrial hard hat
- Lightweight, molded from High Density Polyethylene (HDPE)
- Super comfortable 6 pt. ratcheting suspension fits head sizes 6 ½ to 8
- Rapid-Dial ratcheting headgear – just grab and adjust, even with gloves on
- Comfortable and convenient chin strap with molded chin cup for added security
- Comfortable, replaceable sweatband
- More comfortable than “traditional” hard hats
- Four external clips are strategically positioned to securely fasten elastic straps found on LED lighting systems
- Slotted adaptors allow use with hard hat accessories including face shield adaptors & earmuffs
- Ideal for at height and scaffolding work, confined space applications, construction sites requiring chin straps, and general all-around head protection
- Meets European standards EN 397



**CH-300 Hard Hat - Non-Vented**

| Product No | Cap Color | Suspension | Case Qty/MOQ |
|------------|-----------|------------|--------------|
| 20900      | ○ White   | Rapid Dial | 4            |
| 20901      | ● Yellow  | Rapid Dial | 4            |
| 20903      | ● Orange  | Rapid Dial | 4            |
| 20907      | ● Black   | Rapid Dial | 4            |

**SPARE PARTS & ACCESSORIES**

| Product No | Description                                | Case Qty/MOQ |
|------------|--|--------------|
| 20930      | Replacement ratcheting headgear for CH-300 | 20           |
| 20931      | Replaceable sweatbands                     | 20           |
| 20932      | Replacement chin strap                     | 1            |
| 20937      | Hi-Vis reflective tape kit for CH-300      | 1            |

# HARD HAT INTERCHANGE SYSTEM

The Jackson Safety Hard Hat Interchange System is a must-have accessory when workers need to wear a hard hat with a face shield while on the job. The smart design lets you quickly attach or detach a face shield from the hard hat without removing it, so you stay protected at all times.



- One-button action for quick release, even with gloves on
- Vertical lock-in eliminates helmet/face shield creep
- Audible click—know your PPE is assembled correctly without visual inspection
- Keep your hard hat CE certified with dielectric Hard Hat Interchange System



Compatible with:  
**F4XP, Maxview and Quad 500**

| Product No | Description                 | Case Qty/MOQ |
|------------|-----------------------------|--------------|
| 38423      | HHIS - for Quad 500         | 1            |
| 38424      | HHIS - for F4XP and Maxview | 1            |



Compatible with:  
**Translight, WH70 and LP80 welding helmets**



| Product No | Description          | Case Qty/MOQ |
|------------|----------------------|--------------|
| J5234      | Hard hat adaptor set | 1            |

# HEARING PROTECTION

PROVIDE SAFE WORKING CONDITIONS



## Why is Hearing Protection important?


Continued exposure to noise above certain levels causes permanent hearing damage. Hearing cells cannot be repaired nor do they regenerate.

## When does it become a problem?

Workers are exposed to noise levels at different frequencies that may vary depending on the type of industry and activities performed. Noise levels above 80dB will start causing progressive hearing damage as the noise intensity and exposure increase.


## Getting to Know Hearing

Hearing protection should be taken very seriously and protectors, should be comfortable to wear and offer sufficient attenuation to prevent hearing loss based on individual protection needed.

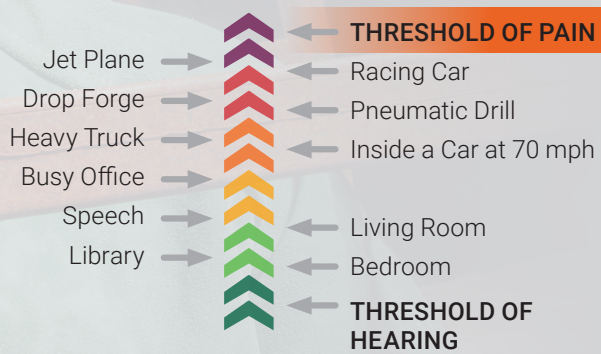

## What Level of Protection Do You Need?

The SNR number gives consumers a methodology to judge performance among different models of hearing protectors. A higher number indicates more effective protection against sound.

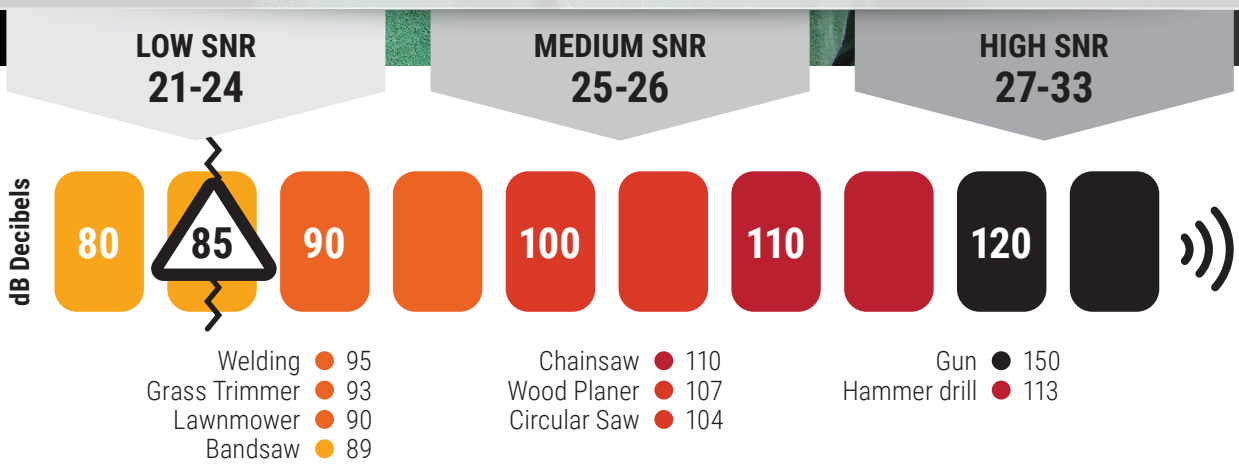

## Employer's responsibilities

Under EU noise legislation, employers must provide the option of suitable hearing protection where noise exceeds 80dB(A). At 85dB, employers must provide and strictly enforce the use of Hearing Protection.

European standards require that hearing protection equipment is tested to determine the Single Number Ratings (SNR) of each product. This is calculated when environmental noise level and the desired final noise levels, at the end organ of hearing, are subtracted.


Jackson Safety® Hearing Protection provides quality, comfort and ease-of-use in reusable and disposable styles for excellent attenuation in a wide variety of noise-level environments. For hearing protection solutions, choose from a wide variety of earplugs designed to make your workday safer and more productive.



## H10 HEARING PROTECTION

### Disposable Earplugs

- Soft roll-down foam for easy insertion
- High visibility for easy compliance monitoring
- Each pair individually bagged
- Corded options available
- Also available in corded metal detectable option
- Longer and softer for helping correct insertion
- Ideal releasing time
- Ideal for high noise environments



Ideal for high noise environments



67212



13821

### H10 HEARING PROTECTION


| Product No | Description                | SNR Rating | Box Qty   | Case Qty/MOQ |
|------------|----------------------------|------------|-----------|--------------|
| 67212      | Disposable earplugs corded | 31 dB      | 100 Pairs | 8 Boxes      |
| 13821      | Metal detectable corded    | 34 dB      | 100 Pairs | 8 Boxes      |



## H20 HEARING PROTECTION

### Reusable Earplugs

- High visibility for easy compliance monitoring
- Soft design to ensure comfort and conformity
- Specific design for easier holding and donning
- Each pair individually bagged in resealable bags to maximize productivity and efficiency
- Ideal for medium-low noise environment



Ideal for medium-low noise environments



13822



67220

### H20 HEARING PROTECTION

| Product No | Description                      | SNR Rating | Box Qty   | Case Qty/MOQ |
|------------|----------------------------------|------------|-----------|--------------|
| 13822      | Reusable metal detectable corded | 27 dB      | 100 pairs | 4 Boxes      |
| 67220      | Reusable earplugs uncorded       | 27 dB      | 100 pairs | 4 Boxes      |



# KNEE PROTECTION

# JACKSON®

SAFETY



Excellent for welders, ship builders, roofers, construction workers, flooring installers and anywhere hard working Knee Pads are required.



Hard Plastic outer shells are extremely strong



Hinged with metal rivet for ease of movement while kneeling or walking



Non-Marking Grip-Strip on any surface



Soft elastic woven straps with reinforced sewn ends are placed well above and below the knee, will not bind behind knee



Closed cell inner foam pad offers the ultimate in comfort and protection



CE CE RATING: LEVEL 1

A / Eine / Une Marque / Una Marca / Un Marchio



Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)  
Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)  
[www.surewerx.eu](http://www.surewerx.eu)

## Jackson Safety Ultra-Flex Knee Pads

- The articulating hinged design ensures proper placement all day long – set them once and forget you are even wearing them
- Soft elastic, extra-wide woven straps with reinforced sewn ends are placed well above and below the knee – no Velcro, which contaminates over time
- Straps stay aligned with your legs in any position – will not bind behind the knee
- Built with strong, flexible hard plastic outer shells that extend well above, below and to the inside/outside of the knee for added knee and leg protection
- Metal rivet hinge ensures long lasting protection while kneeling or walking
- On the outside, pads feature a perfectly placed curved non-marking Grip Strip
- Grip-Strip designed for use in all applications without gumming up
- On the inside, pads offer a long lasting 16 mm (5/8") closed cell foam pad for maximum comfort and protection
- Sweat does not penetrate closed cell foam – lasts longer and won't "stink"
- Our Jackson Safety Ultra-Flex Gel version offers even greater user comfort and protection through the use of a three layer, 19 mm (3/4") thick closed cell foam pad with built-in GEL packs – the ultimate in knee protection!
- Virtually indestructible – built for years of hard work and heavy use
- Specially designed Quick-Snap clips ensure quick and easy removal
- Comes in convenient, reusable mesh bag with one extra Quick-Snap clip
- Pads weigh only 260 g (9 oz.) each



95110



95111


### JACKSON SAFETY ULTRA-FLEX KNEE PADS

| Product No | Shell Color | Grip Strip | Case Qty/MOQ |
|------------|-------------|------------|--------------|
| 95110      | Grey        | Red        | 6 pairs      |
| 95111      | Black       | Red        | 6 pairs      |

## Jackson Safety Ultra-Flex *Gel* Knee Pads

- The Jackson Safety Ultra-Flex Gel Knee Pads offers all of the same legendary features as the Jackson Safety Ultra-Flex pad but has the added advantage of a built in GEL pack for supreme comfort and fit
- This is the ultimate knee pad for extreme applications where users are on their knees for extraordinarily long periods of time
- Unlike many GEL pads on the market, our GEL packs are securely placed inside a three layer, 19 mm (3/4") closed cell foam knee protector compartment and are guaranteed to stay leak-free
- Available with black shells and Hi-Viz orange Grip Strip



 **Special 19 mm foam incorporates a permanent gel pack for ultimate performance and comfort**

### JACKSON SAFETY ULTRA-FLEX GEL KNEE PADS

| Product No | Shell Color | Grip Strip    | Case Qty/MOQ |
|------------|-------------|---------------|--------------|
| 95211      | Black       | Hi-Viz Orange | 6 pairs      |

NEW

# ELBOW PROTECTION

**sellstrom**®



Elbow pads protect the arm during a wide variety of activities, including industrial applications such as grinding or welding in tight spaces.

Lightweight, extremely flexible and cool



Pad stays in position until "you" decide to change or remove



Elbow protection cap slides up and down for personal adjustment, comfort & fit



The 11" long abrasion resistant foam and rubber body protects the arm during a wide variety of activities



A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)

Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)

[www.surewerx.eu](http://www.surewerx.eu)

- Ultimate in elbow and arm protection
- The 11" long abrasion resistant foam & rubber body protects most of your arm
- Secures to your body with comfortable extra-wide top and bottom cinch straps
- Pull tabs help with adjustment even when wearing gloves
- Pad stays in position until "you" decide to change or remove
- Body is extremely flexible, becoming an extension of your arm
- Elbow protecting cap slides up and down for personal adjustment, comfort & fit:
  - shift cap to upper position for arm protection during belly crawl or;
  - lower position for sniper stand off - your choice, your comfort
  - Tough grip cap holds your elbow in place on any surface
- Lightweight and cool - only weighs 7 ounces (each pad)
- Available in black



### SELLSTROM ELBOW PADS

| Product No | Shell Color | Grip Cap | Case Qty/MOQ |
|------------|-------------|----------|--------------|
| S96410     | Black       | Black    | 6            |

# SLIP PROTECTION



## COST SAVINGS

Weather related worker injuries are the

# #1

cause of Worker's Compensation Claims



## TRACTION PERFORMANCE

SureWerx® delivers the most comprehensive range of ice and snow traction aid products, including the original and industry leading K1 Series® mid-sole ice cleat and the Due North® brand of full foot and heel style solutions.

No matter the application, work environment, or type of footwear, we have the depth and breadth necessary to help reduce the risk of slips and falls whether you are at work or play.



**End-users can prevent many injuries and save millions by providing ice traction solutions to their employees**

## FEATURED PRODUCTS

Browse our **traction aids** and **ice cleats** ranging from **mid-sole, heel, all-purpose, heavy duty** and more. All specifically designed for either industrial or recreational use. Products guaranteed to help you get a grip.

### TRANSITIONAL TRACTION

Great for situations that require lots of indoor/outdoor transition such as:

**Couriers/drivers**

**Office workers in parking lot**

**Homecare providers**

MID-SOLE



FULL-SOLE

### ALL DAY TRACTION

Great for situations that require lots of all day traction such as:

**Construction**

**Rail workers**

**Mailmen**

For more information see our **Slip Protection Booklet** or visit our website [www.jacksonsafety.eu](http://www.jacksonsafety.eu)

A / Eine / Une Marque / Una Marca / Un Marchio



Brand / Marke

Ordering E-mail [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu)  
Customer Service [info@surewerx.eu](mailto:info@surewerx.eu)  
[www.surewerx.eu](http://www.surewerx.eu)

K1® Traction Aids

# K1 SERIES® SG1



K1 Series® SG1 traction aids help prevent slips and falls on wet, oily, greasy, and even soapy surfaces. The full foot design is made with an oil-resistant material and features a unique tread pattern to channel liquids away while simultaneously increasing foot contact with the ground.

- Provides maximum grip on slippery surfaces covered in water, oil, grease, soap, and more
- Special tread pattern channels liquids away while increasing foot contact with the ground
- Tough industrial-grade oil resistant material is durable and made to last
- Synthetic rubber material is comfortable, maintains flexibility, and is easy to clean
- Large toe-box provides a snug yet comfortable fit over your footwear
- Built-in retention strap ensures a secure fit throughout the entire day
- Molded one-piece design allows maximum stretch for an easy fit
- Unique inner lining effectively grips the footwear sole to prevent sliding
- Extended pull tab allows convenient on and off and effortless wearing
- Tread pattern extends beyond the bottom of the foot to account for pronation or changes in gait

| Product No  | Description               | Case Qty/MOQ |
|-------------|---------------------------|--------------|
| V9553510-XS | K1 SG1 Traction Aids - XS | 24 pairs     |
| V9553510-S  | K1 SG1 Traction Aids - S  | 24 pairs     |
| V9553510-M  | K1 SG1 Traction Aids - M  | 24 pairs     |
| V9553510-L  | K1 SG1 Traction Aids - L  | 24 pairs     |
| V9553510-XL | K1 SG1 Traction Aids - XL | 24 pairs     |

**Sizes:**


**XS** (Men's 3.5-5, Women's 5-6.5)

**S** (Men's 5.5-7, Women's 7-8.5)

**M** (Men's 7.5-9, Women's 9-10.5)


**L** (Men's 9.5-11, Women's 11-13.5)

**XL** (Men's 11.5-13, Women's 13.5-15)

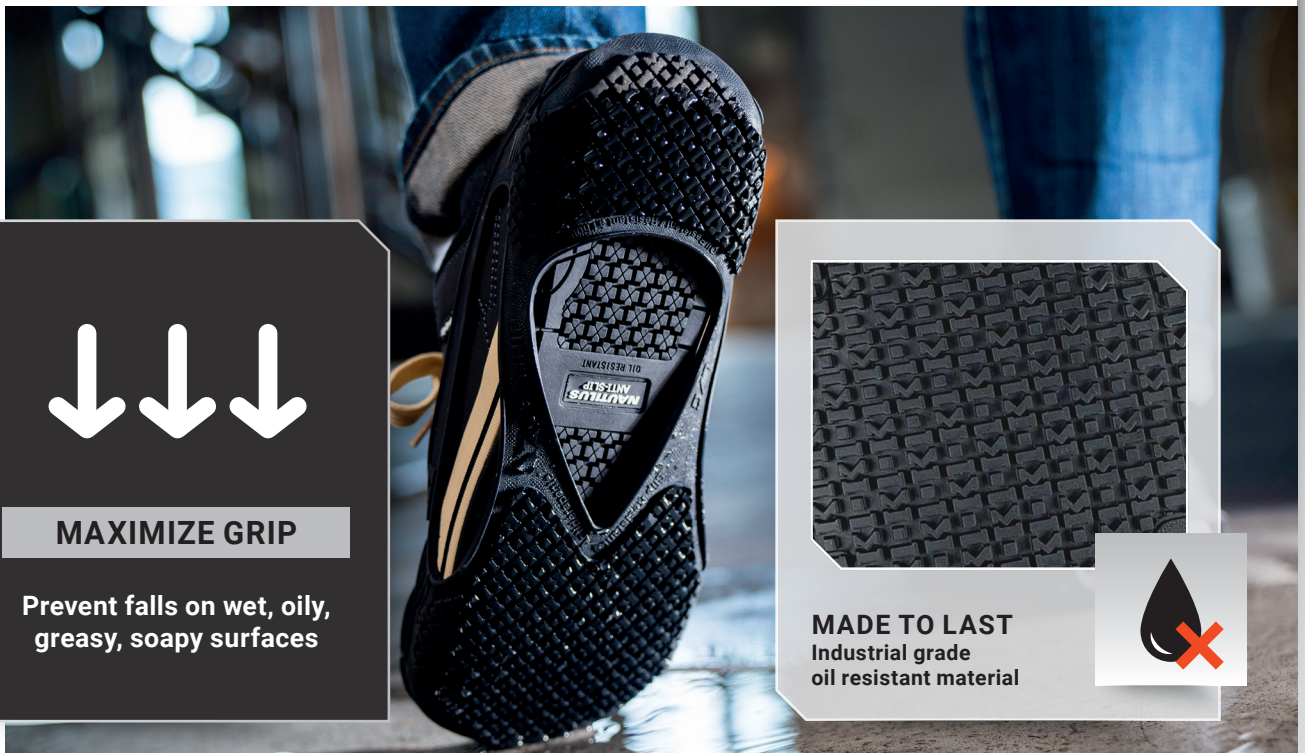

**MAXIMIZE GRIP**

Prevent falls on wet, oily, greasy, soapy surfaces

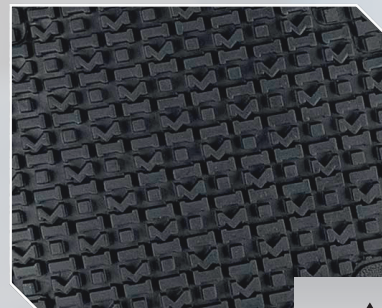

**MADE TO LAST**  
Industrial grade  
oil resistant material



**HEALTH SAFETY PRODUCTIVITY**

Finding a better way


# MEGA COMFORT™

WORK-LIFE WELLNESS SOLUTIONS

MEGACOMFORT was formed in 2002 as a result of the tremendous need to provide ergonomic solutions which will increase employee health and safety while at the same time be cost-effective.


An innovative work-life wellness company for the workplace, we provide clinically proven and field-tested footwear accessories including patented ergonomic anti-fatigue insoles and orthotics to proactively combat pain and fatigue, while concurrently increasing wearer comfort and productivity.

## NORTH AMERICA'S LEADING ANTI-FATIGUE SOLUTION



[megacomfort.com](http://megacomfort.com)

MEGA COMFORT

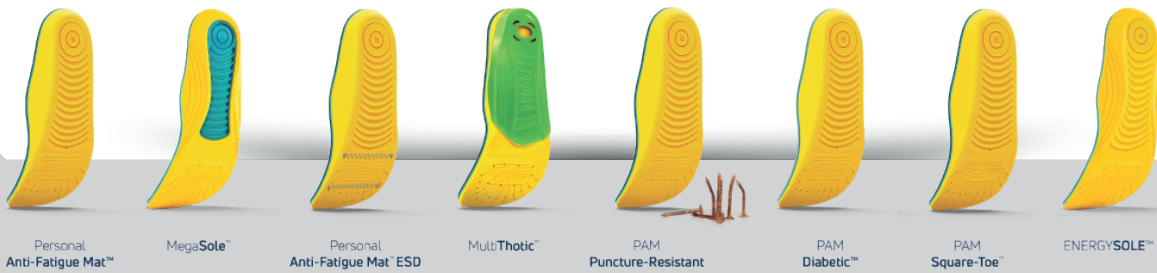

Personal Anti-Fatigue Mat™    MegaSole™    Personal Anti-Fatigue Mat™ ESD    MultiThotic™    PAM Puncture-Resistant    PAM Diabetic™    PAM Square-Toe™    ENERGYSOLE™

SureWerx® is expanding its brand portfolio:  
MEGACOMFORT and NEOS OVERSHOE®.

NEOS OVERSHOES

# CONQUER THE TERRAIN



MAXIMUM TRACTION

ALL-WEATHER PROTECTION

NEOS, a SureWerx® brand has been a leader in overshoe products since 1994 as one of the first brands to offer a lightweight solution to providing an extra level of protection, insulation, and traction. Designed to be worn right over your everyday footwear, NEOS overshoes are versatile, easy to pack, and easy to slip on and off. NEOS are made from technically advanced materials to provide durability and performance in the most extreme conditions.



[www.footwearspecialties.com/neos](http://www.footwearspecialties.com/neos)





Be Smart. Be Safe. Be Sure.®

VISIT OUR WEBSITE

www.surewerx.eu



## OUR TRUSTED BRANDS



### SUSTAINABILITY

**NEAR-SOURCING**  
Shorter Supply Chain  
Good for the community

**BULK TRANSPORT**  
Efficient Storage and  
Space Saving

**REDUCING WASTE**  
Transition from print to mostly  
electronic marketing materials

# PRODUCT INDEX

| Product No   | Page   | Product No  | Page                       |
|--|--------|---|----------------------------|
| 13821 H10 Metal detectable corded                        | 113    | 14796 Universal level                                       | 82                         |
| 13822 H20 Reusable metal detectable corded               | 113    | 14797 Dial & level  | 82                         |
| 14200 Maxview Faceshield                                 | 95     | 14798 Centering pin   | 83                         |
| 14201 Maxview Faceshield anti-fog coating                | 95     | 20693 370 Speed Dial Headgear - for Translight              | 51, 53, 55, 63             |
| 14214 Maxview clear replacement window                   | 29, 95 | 20694 370 Speed Dial Headgear - for Quad 500                | 63, 97                     |
| 14215 Maxview clear replacement window anti-fog          | 29, 95 | 20695 370 Speed Dial Headgear - for Maxview/F4XP            | 63, 93, 95                 |
| 14220 Quad 500 Faceshield                                | 97     | 20696 370 Speed Dial Headgear - for Graphic welding helmets | 57, 58, 59, 60, 61, 62, 63 |
| 14230 Quad 500 Faceshield Flip Shade 5 IR                | 97     | 20900 CH-300 Hard Hat, white                                | 111                        |
| 14233 Quad 500 Faceshield Flip Shade 8 IR                | 97     | 20901 CH-300 Hard Hat, yellow                               | 111                        |
| 14250 Quad 500 clear window anti-fog                     | 31, 97 | 20903 CH-300 Hard Hat, orange                               | 111                        |
| 14255 Quad 500 Shade 5 visor                             | 31, 97 | 20907 CH300 Hard Hat, black                                 | 111                        |
| 14258 Quad 500 Shade 8 visor                             | 31, 97 | 20930 Replacement ratcheting headgear for CH-300            | 111                        |
| 14260 F4XP Crown & 370 Speed Dial Headgear only          | 93     | 20931 Replaceable sweatbands for CH-300                     | 111                        |
| 14262 F4XP Premium Face Shield (crown, headgear, window) | 93     | 20932 Replacement chin strap for CH-300                     | 111                        |
| 14311 280PL Welding Helmet                               | 41     | 20937 Hi-Vis reflective tape kit for CH-300                 | 111                        |
| 14531 Leather Welding Hood                               | 49     | 21000 GPL500 Goggles, Blue, Clear, anti-fog                 | 99                         |
| 14752 Wrap-a-round 164B EX medium                        | 83     | 21001 GPL530 Goggles, Green, Shade 3 IR, anti-fog           | 99                         |
| 14753 Wrap-a-round 176B large                            | 83     | 21002 GPL550 Goggles, Green, Shade 5 IR, anti-fog           | 99                         |
| 14754 Wrap-a-round 177B EX large 7'                      | 83     | 29057 Face Shield PC window, R type, molded, clear, V8B     | 93                         |
| 14756 Wrap-a-round 179B EX large 9'                      | 83     | 29058 Face Shield PC window, R type, molded, shade 3, V8B   | 93                         |
| 14763 Wrap-a-round 164GG medium                          | 83     | 29059 Face Shield PC window, R type, molded, shade 5, V8B   | 93                         |
| 14766 Wrap-a-round 177GG EX large 7'                     | 83     | 29087 Face Shield PC window, B type, molded, clear          | 93                         |
| 14767 Wrap-a-round 179GG EX large 9'                     | 83     | 30706 Face Shield PC window, E type, stamped, clear         | 93                         |
| 14771 Marker standard                                    | 80     | 36292 Welding Curtain, orange, 1.8x1.8m                     | 77                         |
| 14772 Adaptor standard                                   | 80     | 36299 Welding Curtain, green, 1.8x1.8m                      | 77                         |
| 14773 Marker jumbo                                       | 80     | 36307 Welding Curtain, orange, 1.8x2.4m                     | 77                         |
| 14774 Adaptor jumbo                                      | 80     | 36315 Welding Curtain, green, 1.8x2.4m                      | 77                         |
| 14775 Centering head standard                            | 80     | 36335 Welding frame 6' x 4' (1.8x1.2m)                      | 77                         |
| 14776 Centering head jumbo                               | 80     | 36336 Welding frame 6' x 6' (1.8x1.8m)                      | 77                         |
| 14777 Pro-mag level                                      | 81     | 36338 Welding frame 6' x 8' (1.8x2.4m)                      | 77                         |
| 14778 Protractor   | 81     | 36687 Hooks for curtains and blankets                       | 77                         |
| 14779 Pipe flange aligner                                | 82     | 37198 Welding frame, adjustable 6' x 6' to 6' x 8'          | 77                         |
| 14780 Radius marker mini                                 | 80     | 37606 Welding Curtain, orange, 1.8x1.2m                     | 77                         |
| 14781 Radius marker small                                | 80     | 37700 Welding Curtain, green, 1.8x1.2m                      | 77                         |
| 14782 Radius marker standard                             | 80     | 38423 Hard Hat Interchange System (Quad 500)                | 97, 111                    |
| 14783 Radius marker jumbo                                | 80     | 38424 Hard Hat Interchange System (F4XP, Maxview)           | 93, 95, 111                |
| 14784 Circle eclipse projector                           | 81     | 40040 AIRMAX+ PAPR with Translight 355 Welding Helmet       | 21                         |
| 14785 Multi trammel heads                                | 81     | 40041 AIRMAX+ PAPR with Translight Flip 455 Welding Helmet  | 23                         |
| 14786 Dial angle flange level                            | 82     | 40043 AIRMAX+ PAPR with Translight+ 555 Welding Helmet      | 25                         |
| 14795 Flange aligner base                                | 82     |   |                            |

# PRODUCT INDEX

| Product No  | Page                           |
|---|--------------------------------|
| 40100 Translight 355 shell with Face Seal and Airduct         | 21                             |
| 40101 Translight Flip 455 shell with Face Seal and Airduct    | 23                             |
| 40103 Translight+ 555 shell with Face Seal and Airduct        | 25                             |
| 40200 Translight 355 PAPR Face Seal                           | 21                             |
| 40201 Translight Flip 455 PAPR Face Seal                      | 23                             |
| 40203 Translight+ 555 PAPR Face Seal                          | 25                             |
| 40311 AIRMAX+ Pre-filters                                     | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40312 AIRMAX+ Odour Removing Filter                           | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40313 AIRMAX+ Spark arrestor                                  | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40332 HEPA PAPR filter  | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40340 Airmax+ FR Hose with cover, 85 cm                       | 19, 27, 29, 31, 33             |
| 40341 AIRMAX+ FR Hose with cover, 105 cm                      | 21, 23, 25, 33                 |
| 40353 AIRMAX+ 4-Cell 7.4V Battery                             | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40363 AIRMAX+ PAPR charger                                    | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40364 AIRMAX 5-Station Battery Charger                        | 34                             |
| 40365 AIRMAX+ 5-Station Battery Charger                       | 35                             |
| 40368 FR Comfort Backpack for PAPR blower                     | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40369 Belt with leather straps/harness                        | 33                             |
| 40369 FR Comfort belt with leather straps/harness             | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40371 AIRMAX+ Waist belt                                      | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40381 AIRMAX+ blower unit                                     | 19, 21, 23, 25, 27, 29, 31, 33 |
| 40391 PAPR Carrying Bag                                       | 17, 19, 21, 23, 25             |
| 40421 AIRMAX+ PAPR with 280 Series Welding Helmet             | 19                             |
| 40500 Laser Welding Helmet GDS ADF, absorptive glass-DB7      | 67                             |
| 40504 GDS ADF + absorptive glass filter, DB7                  | 72                             |
| 40508 Aluminium Frame Laser Welding Helmet                    | 67                             |
| 40509 Outer Cover Lens for Laser Helmet                       | 67                             |
| 40593 Premium headgear  | 63, 67                         |
| 40595 Sweatband for premium headgear                          | 63, 67                         |
| 40601 AIRMAX+ with Maxview anti-fog                           | 29                             |
| 40620 AIRMAX+ with Quad 500                                   | 31                             |
| 40630 AIRMAX+ with Quad 500 Flip Visor Shade 5 IR             | 31                             |
| 40633 AIRMAX+ with Quad 500 Face Shield Flip Visor Shade 8 IR | 31                             |
| 46200 Rebel ADF Welding Mask                                  | 47, 72                         |
| 46230 TRANSLIGHT 355 Welding Helmet with ADF, black           | 51                             |
| 46240 TRANSLIGHT FLIP 455 Welding Helmet with ADF, black      | 53                             |
| 46250 TRANSLIGHT+ 555 Welding Helmet with ADF, black          | 55                             |
| 46432 Translight 355 Replacement ADF                          | 51, 72                         |
| 46442 Translight 455 Replacement ADF                          | 53, 72                         |
| 46452 Translight+ 555 Replacement ADF                         | 55, 72                         |

| Product No  | Page           |
|---|----------------|
| 46600 Rebel Replacement FR Hood                           | 47             |
| 46640 Translight Flip 455 Face Shield Replacement Window  | 53             |
| 46914 Translight 455 Internal Safety Plates               | 51, 53         |
| 46915 Translight+ 555 Internal Safety Plates (Pack of 10) | 55             |
| 46923 Translight 355/455 External Safety Plates           | 51, 53         |
| 46925 Translight+ 555 External Safety Plates              | 55             |
| 46930 Rebel Replacement Lens Kit                          | 47             |
| 46991 Translight Flip Spring Replacement Mechanism Kit    | 53             |
| 46992 Translight Flip 455 Nuts and bolts                  | 53             |
| 46993 Translight 355 Lens retainer                        | 51             |
| 46995 Translight+ 555 Replacement Retainer                | 55             |
| 46996 Translight+ 555 Darkening hood                      | 55             |
| 47001 Maxview (A/F) PAPR Complete Head Top                | 29             |
| 47010 Translight 355 PAPR helmet with ADF                 | 21             |
| 47011 Translight Flip 455 PAPR helmet with ADF            | 23             |
| 47013 Translight+ 555 PAPR helmet with ADF                | 25             |
| 47020 Quad 500/Clear PAPR Complete Head Top               | 31             |
| 47030 Quad 500/Shade 5 PAPR Complete Head Top             | 31             |
| 47033 Quad 500/Shade 8 PAPR Complete Head Top             | 31             |
| 47100-1 ADF - 6 FEET UNDER                                | 57, 72         |
| 47100-4 External protective lens (114.3 x 133.35 mm)      | 57, 58, 59, 60 |
| 47100 6 FEET UNDER, Graphic Welding Helmet                | 57             |
| 47101-1 ADF - HELLFIRE                                    | 60, 72         |
| 47101-3 Internal protective lens (103.5 x 95.5 mm)        | 60             |
| 47101 HELLFIRE, Graphic Welding Helmet                    | 60             |
| 47102-1 ADF - GRAY MATTER                                 | 61, 72         |
| 47102 GRAY MATTER, Graphic Welding Helmet                 | 61             |
| 47103-1 ADF - FREEDOM                                     | 58, 72         |
| 47103 FREEDOM, Graphic Welding Helmet                     | 58             |
| 47104-1 ADF - REAPERS N' ROSES                            | 59, 72         |
| 47104-3 Internal protective lens (103.5 x 69.2 mm)        | 59             |
| 47104 REAPERS N' ROSES, Graphic Welding Helmet            | 59             |
| 47105-1 ADF - BEAD DEAMON                                 | 62, 72         |
| 47105-3 Internal protective lens (105.4 x 65.4 mm)        | 57, 58, 62     |
| 47105 BEAD DEMON, Graphic Welding Helmet                  | 62             |
| 47421 280 Series PAPR Complete Head Top                   | 19             |
| 50000 Jackson SG, clear, anti-scratch                     | 103            |
| 50001 Jackson SG, clear, anti-fog                         | 103            |
| 50002 Jackson SG, amber, anti-scratch                     | 103            |
| 50003 Jackson SG, amber, anti-fog                         | 103            |

# PRODUCT INDEX

| Product No   | Page |
|--|------|
| 50004 Jackson SG, I/O, anti-scratch                | 103  |
| 50005 Jackson SG, Blue Shield, anti-scratch        | 103  |
| 50006 Jackson SG, Smoke Mirror, anti-scratch       | 103  |
| 50007 Jackson SG, Smoke Mirror, anti-fog           | 103  |
| 50008 Jackson SG, IR 3                             | 103  |
| 50009 Jackson SG, Blue Mirror, anti-scratch        | 103  |
| 50010 Jackson SG, IR 5                             | 103  |
| 50040 Jackson SG, readers 1.5                      | 103  |
| 50041 Jackson SG, readers 2.0                      | 103  |
| 50042 Jackson SG, readers 2.5                      | 103  |
| 50099 JACKSON Microfiber bag for Safety Glasses    | 103  |
| 67212 H10 Disposable earplugs corded               | 113  |
| 67220 H20 Reusable earplugs uncorded               | 113  |
| 95110 Jackson Ultra-Flex Knee Pads, grey           | 115  |
| 95111 Jackson Ultra-Flex Knee Pads, black          | 115  |
| 95211 Jackson Ultra-Flex Gel Knee Pads, black      | 115  |
| J1858 Wrap-a-round 164B EX medium                  | 83   |
| J1859 Wrap-a-round 176B large                      | 83   |
| J1860 Wrap-a-round 177B EX large 7'                | 83   |
| J1861 Wrap-a-round 179B EX large 9'                | 83   |
| J1863 Wrap-a-round 100 meters roll (12,7cm x 100m) | 83   |
| J1864 Wrap-a-round 100 meters roll (17,8cm x 100m) | 83   |
| J1865 Wrap-a-round 17,8 cm x 4,5 m roll            | 83   |
| J1867 Wrap-a-round 164GG medium                    | 83   |
| J1869 Wrap-a-round 177GG EX large 7'               | 83   |
| J1870 Wrap-a-round 179GG EX large 9'               | 83   |
| J1874 Marker standard                              | 80   |
| J1875 Adaptor standard                             | 80   |
| J1877 Marker jumbo                                 | 80   |
| J1878 Adaptor jumbo                                | 80   |
| J1879 Centering head standard                      | 80   |
| J1880 Centering head jumbo                         | 80   |
| J1881 Pro-mag level                                | 81   |
| J1882 Protractor                                   | 81   |
| J1883 Pipe flange aligner                          | 82   |
| J1884 Radius marker mini                           | 80   |
| J1885 Radius marker small                          | 80   |
| J1886 Radius marker standard                       | 80   |
| J1887 Radius marker jumbo                          | 80   |
| J1888 Circle eclipse projector                     | 81   |

| Product No   | Page   |
|--|--|
| J1890 Multi trammel heads                            | 81   |
| J1891 Dial angle flange level                        | 82   |
| J1903 Flange aligner base                            | 82   |
| J1904 Universal level                                | 82   |
| J1905 Dial & level                                   | 82   |
| J1906 Centering pin                                  | 83   |
| J1979 PipePro Centering head AL medium               | 79   |
| J1980 PipePro Centering head AL large                | 79   |
| J1981 PipePro Aluminum level                         | 79   |
| J1982 PipePro Flange Aligner Tool                    | 79   |
| J2711 Welding Blankets Uncoated Fiberglas, 1x1m      | 75   |
| J2712 Welding Blankets Uncoated Fiberglas, 1x2m      | 75   |
| J2713 Welding Blankets Uncoated Fiberglas, 2x2m      | 75   |
| J2714 Welding Blankets Uncoated Fiberglas, 3x2m      | 75   |
| J2715 Welding Blankets Uncoated Fiberglas, 1x25m     | 75   |
| J2716 Welding Blankets Fiberglass PU Coated, 1x1m    | 75   |
| J2717 Welding Blankets Fiberglass PU Coated, 1x2m    | 75   |
| J2718 Welding Blankets Fiberglass PU Coated, 2x2m    | 75   |
| J2719 Welding Blankets Fiberglass PU Coated, 2x3m    | 75   |
| J2720 Welding Blankets Fiberglass PU Coated, 1x25m   | 75   |
| J2721 Welding Blankets Fiberglass Vermiculite, 1x1m  | 75   |
| J2722 Welding Blankets Fiberglass Vermiculite, 2x1m  | 75   |
| J2723 Welding Blankets Fiberglass Vermiculite, 2x2m  | 75   |
| J2724 Welding Blankets Fiberglass Vermiculite, 3x2m  | 75   |
| J2725 Welding Blankets Fiberglass Vermiculite, 1x25m | 75   |
| J2726 Welding Blankets Silica Uncoated, 1x1m         | 75   |
| J2727 Welding Blankets Silica Uncoated, 1x2m         | 75   |
| J2728 Welding Blankets Silica Uncoated, 2x2m         | 75   |
| J2729 Welding Blankets Silica Uncoated, 3x2m         | 75   |
| J2730 Welding Blankets Silica Uncoated, 1x25m        | 75   |
| J2741 Magnifying Lens 1.0 Clear                      | 71   |
| J2743 Magnifying Lens 1.5 Clear                      | 71   |
| J2745 Magnifying Lens 2.0 Clear                      | 71   |
| J2747 Magnifying Lens 2.5 Clear                      | 71   |
| J5234 Hard hat adaptor set                           | 51, 53, 55, 65, 111  |
| J5237 370 sweat band                                 | 21, 23, 25, 29, 31, 51, 53, 55, 57, 58, 59, 60, 61, 62, 63, 65, 93, 95, 97 |
| J5241 PAPR FR Hose Cover                             | 17, 19, 21, 23, 25, 27, 29, 31, 33   |
| J5243 Hard hat sweat band                            | 65   |
| J5244 Face seal for Maxview and Quad 500             | 29, 31   |

# PRODUCT INDEX

| Product No  | Page               |
|---|--------------------|
| J5250 Face Seal for 280 Series                              | 19                 |
| J5251 F50 Visor Face Seal                                   | 27                 |
| J5252 F50 Visor Lens  | 27                 |
| J5260 PAPR Headgear for 280 Series                          | 19                 |
| J5462 F50 PAPR Sweat Band                                   | 27                 |
| J7050 AIRMAX PAPR System with Duo Welding Helmet 4/9-13 ADF | 17                 |
| J7051 WH25 DUO PAPR Welding Helmet with 4/9-13 ADF          | 17                 |
| J7060 WH25 DUO PAPR Sweatband                               | 45                 |
| J7061 WH25 DUO PAPR Faceseal                                | 17, 45             |
| J7062 WH25 DUO PAPR Head Gear                               | 45                 |
| J7063 AIRMAX Welding PAPR FR Hose & Cover                   | 17                 |
| J7064 Hose without cover, 85 cm                             | 33                 |
| J7065 AIRMAX Welding PAPR Motor                             | 17                 |
| J7067 AIRMAX Welding PAPR Charger                           | 17                 |
| J7068 AIRMAX Welding PAPR 4C Battery                        | 17                 |
| J7069 AIRMAX Welding PAPR Waist Belt                        | 17                 |
| J7101 WH25 DUO Welding Helmet with 4/9-13 ADF               | 45                 |
| J7172 WH25 DUO ADF Cradle                                   | 45                 |
| J7173 WH25 DUO Welding - Lens Retainer                      | 45                 |
| J7174 WH25 DUO Welding Head Gear Pro                        | 45                 |
| J7175 WH25 DUO Sweat Band Pro                               | 45                 |
| J7176 WH25 DUO Front Cover Lens                             | 45                 |
| J7177 WH25 DUO Inner Cover Lens                             | 45                 |
| J7180 DUO ADF 4/9-13  | 45, 72             |
| J7210 AIRMAX Welding P3 PAPR Filter                         | 17                 |
| J7260 PAPR Head Gear  | 19, 27             |
| J7261 F50 PAPR Face Shield                                  | 27                 |
| J7265 AIRMAX+ with F50 Face Shield                          | 27                 |
| J7910 WH25 DUO Weld Helm Spacer Kit                         | 45                 |
| J8049 WH20 ASPIRE Welding Helmet with WF20 4/9-13 EXT ADF   | 43                 |
| J8101 WF10 Welding Passive Filter 110x90mm Shade 9          | 71                 |
| J8102 WF10 Welding Passive Filter 110x90mm Shade 10         | 71                 |
| J8103 WF10 Welding Passive Filter 110x90mm Shade 11         | 71                 |
| J8104 WF10 Welding Passive Filter 110x90mm Shade 12         | 71                 |
| J8302 Inner lens 107x51mm                                   | 41, 43, 49         |
| J8304 External/Internal protective lens 110 x 90 mm         | 61, 62             |
| J8319 Outer lens 115x104mm                                  | 43                 |
| J8370 WH20 Aspire Head gear with sweatband                  | 43                 |
| J8570 375 head gear for WH70                                | 21, 23, 25, 63, 65 |
| J8571 PAPR 370 Headgear for Maxview                         | 29, 63             |

| Product No  | Page   |
|---|--------|
| J8572 PAPR 370 Headgear for Quad 500  | 31, 63 |
| J9913 WH70 Replacement shell for EXT ADF                                    | 65     |
| J9916 WH70 Welding Helmet with Grand GDS ADF                                | 65     |
| J9927 WF70 GDS ADF  | 72     |
| J9931 Outer lens 147x125mm  | 65     |
| J9932 Inner lens 107.5x71.5mm   | 65     |
| J9934 WH70 Washer set   | 65     |
| J9936 Mag lens holder   | 65     |
| J9942 Leather neck protection   | 65     |
| S28311 280 Series Welding Helmet MG 10, silver - lift front                 | 41     |
| S72000 XP410 glasses, clear, HC/AF  | 105    |
| S72001 XP410 glasses, smoke, HC/AF  | 105    |
| S72300 XP450 glasses, clear, HC/AF  | 105    |
| S72301 XP450 glasses, smoke, HC/AF  | 105    |
| S72400 XP460 glasses, clear, HC/AF  | 105    |
| S72401 XP460 glasses, smoke, HC/AF  | 105    |
| S80200 Odyssey II Series Industrial Dual Lens Goggle                        | 101    |
| S80201 Odyssey II Series Chemical Splash Dual Lens Goggle                   | 101    |
| S80210 Odyssey II Series Shade 5 Cutting Goggle                             | 101    |
| S80231 Odyssey II Series Clean Room Goggle                                  | 101    |
| S96410 Sellstrom Elbow Pads   | 117    |
| TCG6B Arc Flash Suit Kit (100 cal/cm2)                                      | 88     |
| TCG75B Arc Flash Suit Kit (75 cal/cm2)                                      | 88     |
| TCG-EU-G1-024 Replacement Arc Flash Face Shield, Class 1                    | 86     |
| TCG-EU-G1-026AF Replace. Arc Flash Face Shield, Anti-Scratch/Fog, Class 1   | 86     |
| TCG-EU-G1-124A80 Arc Flash Face Shield Kit, A8, Class 1                     | 86     |
| TCG-EU-G1-124R Arc Flash Face Shield Kit, Class 1                           | 86     |
| TCG-EU-G1-126AFA80 Arc Flash Face Shield Kit, Anti-Scratch/Fog, A8, Class 1 | 86     |
| TCG-EU-G1-126AFR Arc Flash Face Shield Kit, Anti-Scratch, Anti-Fog, Class 1 | 86     |
| TCG-EU-G1-126R Arc Flash Face Shield Kit, Anti-Scratch, Class 1             | 86     |
| TCG-EU-G2-K25A4 Arc Flash Face Shield Kit, A4 (25 cal/cm2)                  | 87     |
| TCG-EU-G2-K25A8 Arc Flash Face Shield Kit, A8 (25 cal/cm2)                  | 87     |
| TCG-EU-G2-K25 Arc Flash Face Shield Kit (25 cal/cm2)                        | 87     |
| TCG-EU-G2-K25WBA Arc Flash Face Shield Kit, WBA (25 cal/cm2)                | 87     |
| TCG-EU-G2-KA4 Arc Flash Face Shield Kit, A4 (17 cal/cm2)                    | 87     |
| TCG-EU-G2-KA8 Arc Flash Face Shield Kit, A8 (17 cal/cm2)                    | 87     |
| TCG-EU-G2-K Arc Flash Face Shield Kit (17 cal/cm2)                          | 87     |
| TCG-EU-G2-KWBA Arc Flash Face Shield Kit, WBA (17 cal/cm2)                  | 87     |
| V9553510 K1 SG1 Traction Aids   | 119    |

# WARRANTY TABLE

At Surewerx, servicing our customers is our #1 Priority. This is why we have put together one of the most comprehensive and user-friendly Warranty Programs in the industry. Simply, we stand by our products and craftsmanship behind them.

In the event our end users are experiencing difficulties with our products, we recommend completing all of the trouble shooting options first, before we diagnose and complete the warranty process.

## Common Issues with Welding Helmets Not Working

**Scenario 1:** Problems after end user changes environments

**Solution:** Adjust Delay/Sensitivity Setting on the Helmet.

Note: BH3 models work differently than our other ADFs, in that you turn sensitivity all the way up before adjusting, whereas other helmets start at 0.

**Scenario 2:** Helmet Sensors are not functioning properly

**Solution:** Check sensors, clear from any slag or debris. Also make sure you are welding in an unhindered environment

**Scenario 3:** Auto-darkening slow or not working properly

**Solution:** Check and replace batteries

**Scenario 4:** Filter not darkening properly, and there are issues with visibility, or spatter

**Solution:** Change external and internal safety plate

**Scenario 5:** Filter remains dark after completing a weld

**Solution:** Ambient light is too bright and user needs to adjust delay

**Scenario 6:** Helmet is giving off light flashes

**Solution:** Typically caused from low batteries. Try to replace batteries, and for the solar components, this occasionally happens when stored in a dark environment. Place helmet outdoors facing sunlight to recharge, and try to store in a brighter environment.

If the end user has been unsuccessful trouble shooting, they should contact the distributor/company they purchased from for warranty claim assistance before contacting Surewerx directly.

Surewerx honors warranty claims on welding helmets listed in the event of a defect within the warranty coverage time frame.

Warranty coverage begins from the date of purchase for the end user.

If unable to resolve with your distributor/company product was purchased from, customer may email our customer service team [sales@jacksonsafety.eu](mailto:sales@jacksonsafety.eu), with the following:

*Completed Surewerx Warranty Claim Form  
Attached Proof of Purchase*

We want to make sure all attempts at troubleshooting have been used before conducting the claim process.

Once claim has been submitted, and product is determined to be defective under warranty, a replacement part or unit will be sent.

We ask that you send the defective product here for further evaluation:

**SureWerx UK Ltd.**

**PO Box 18759**

**Solihull**

**England**

**B93 3NA**

**UK**

If you have further questions, you may reach out to customer service at:

[info@surewerx.eu](mailto:info@surewerx.eu)

| Product | Years |
|---------|-------|
|---------|-------|

## ADFs

|                         |   |
|-------------------------|---|
| Duo ADF                 | 1 |
| Translight 355 ADF      | 3 |
| Translight 455 ADF      | 3 |
| Translight 555 ADF      | 3 |
| Rebel ADF               | 2 |
| WF20 ES ADF             | 1 |
| WF70 DS 4/9-13 ADF      | 3 |
| WF70 ES 4/9-13 ADF      | 3 |
| WF70 GDS 4/6-8/9-13 ADF | 3 |
| Graphic Helmets ADFs    | 2 |

## WELDING HELMETS

|               |   |
|---------------|---|
| Helmet Shells | 3 |
|---------------|---|

## PAPR SYSTEMS

| AIRMAX      |     |
|-------------|-----|
| Blower Unit | 1,5 |
| Battery     | 1   |

| AIRMAX+     |     |
|-------------|-----|
| Blower Unit | 1,5 |
| Battery     | 1   |

| AIRMAX ELITE |     |
|--------------|-----|
| Blower Unit  | 1,5 |
| Battery      | 1   |

## PPE

|     |   |
|-----|---|
| PPE | 1 |
|-----|---|

# STANDARD TERMS & CONDITIONS OF SALE

## SUREWERX UK LIMITED

### 1. General

"Jackson Safety" and "Fall Safe": "we", "us" are trading names of SureWerx UK Limited, ("SW") a limited liability company registered in UK and trading as Jackson Safety and Fall Safe, with a registered office located at C/O French Ludlam & Co Limited, 661 High Street, Kingswinford, West Midlands, DY6 8AL, UK. "Buyer": The legal entity to whom we supply goods (collectively "Products") of any kind. Except insofar as otherwise explicitly agreed in writing between SureWerx UK Limited and the Buyer, these Standard Terms & Conditions (the "Conditions") will apply to all transactions between SW and the Buyer, whether this is done in writing, via the internet, electronically or verbally (each a "Contract").

### 2. Shipment agreements

**2.1** An agreement with SW to supply Products is only established when SW has confirmed in writing a Buyer purchase order within 8 days following its receipt. Any amendments must be confirmed in writing by SW.

**2.2** Any purchase order not confirmed in writing by SW shall be null and void.

### 3. Terms of delivery and transportation

**3.1** The method of transport shall be determined by SW if not specified by the Buyer. For certain destinations SW may require the buyer to arrange their own transportation on an ex-works basis, SW will make the Buyer aware of this in advance of any order being agreed. Any specific requirements of the Buyer on the transport and shipment will only be performed if the Buyer has declared that it will bear the additional costs.

### 4. Time of delivery

**4.1** The periods stated for delivery are not binding and are only target dates. Failure to meet the requested time of delivery does not in any event, provide grounds for the cancellation of an order or agreement, nor does it entitle the Buyer to any kind of compensation. We explicitly reserve the right to deliver by instalments, each of which will qualify as partial sale. The delivery of an order by instalments cannot in any event justify the refusal to pay for the Products supplied. Any liability on the part of SW for failure or delay in delivery is hereby excluded.

### 5. Liability

**5.1** In the event that the Products supplied are damaged or incomplete, or in the event of any error, missing piece or any other type of irregularity, the Buyer is obliged to refuse the Products on delivery or to only accept them subject to a written reservation. Every complaint relating to the Products as delivered must be sent to us in writing within 5 working days as from the receipt, with a reference to the bill of lading. After that period, the Products will be deemed to have been finally accepted by the Buyer. No goods may be returned without prior written permission from SW. Such permission will not in any way imply that the Products have been acknowledged by SW as being damaged. Goods being returned, in whatever way they are being sent, remain at the Buyer's risk and will be sent to our warehouse, carriage free.

**5.2** SW shall not be liable for or responsible for any defect or other claim which arises from (i) normal wear and tear, misuse, negligence, accident, abuse, use not in accordance with standards of proper practice or normal usage conditions set out in the catalogues, manuals or handbooks supplied by SW, modification or alteration not authorized in writing by SW, or use in conjunction with a third party product, or (ii) Buyer's negligence, or (iii) the breach of Buyer's obligations under this Agreement.

### 6. Delivery and risks

**6.1** Where goods travel on an ex works basis delivery is regarded as being complete on the moment of departure from our warehouse

loading dock. It is the Buyer's responsibility to ensure adequate insurance is in place to cover the transit risk. The risk of loss, damage or destruction of the goods to be supplied by SW is borne by the Buyer from the moment that these goods are collected in accordance with this article.

**6.2** Where SW arranges the transportation it is the Buyers responsibility to ensure that the goods are inspected upon receipt and that SW are notified of any shortages or damages within 24 hours, together with supporting photographic evidence. SW will not accept liability to make good any missing or damaged product if this is not the case.

### 7. Force majeure and hardship

**7.1** All delivery and other obligations of SW will be suspended in the event of force majeure. In such cases, SW is only obliged to deliver or perform its obligations to the extent possible. 'Force majeure' includes the following, although this is not an exhaustive list: war, mobilization of troops, embargo, partial or complete strike, lock-out, riot, epidemics, natural disasters, import and export restrictions, machinery failure, staff sickness, fire, explosion, accidents of any kind and any cause hampering the normal supply by our suppliers of raw materials, fuels and inventory for our normal production, transportation or dispatch, as well as all similar circumstances affecting SW, its subcontractors or suppliers.

### 8. Re-sale

**8.1** The Buyer may only re-sell the Products in their original packaging, without modification.

### 9. Payments

**9.1** All amounts due to SW are payable within 30 days as from the invoice date, without discount, deduction or offset.

**9.2** SW retains legal title to all Products until settlement has been received in full for the associated Sales Invoice. In the event of non-payment or insolvency SW, or its agents, reserve the right to enter the Buyers premises, without notice, to recover the Products.

### 10. Compliance with Laws

**10.1** Buyer shall comply with all laws and regulations applicable to the storage, use, handling, installation, registration and labelling of all Products as from their delivery and the disposal of all wastes and residues (including packaging) resulting from your use of the Products.

### 11. Privacy

**11.1** Buyer agrees that SW and entities related with it may collect, store and use Buyer data, including personal data, for the purpose of facilitating its marketing and sale of the Products, and Buyer hereby consents to such collection, storage and use of Buyer data by SW and entities related with it for these purposes.

### 12. Miscellaneous

**12.1** Any provision in these Conditions which is void or inapplicable shall have no effect on the validity of the other provisions. Any invalid clause will be replaced by another one that is appropriate.

**12.2** SW may carry out its obligations under the Contract through any agents or sub-contractors appointed by it in its absolute discretion.

### 13. Applicable law

**13.1** All Contracts are deemed executed at the registered office of SW in UK and are governed by the laws of England and Wales. Any dispute concerning the interpretation, implementation and cancellation of the present agreement which cannot be settled amicably will be resolved exclusively by the Courts of England. SW may also introduce any proceedings before the courts of the residence of a debtor. The Vienna Sales Convention does not apply.

**JACKSON**<sup>®</sup>  
SAFETY

**sellstrom**<sup>®</sup>

**FS**  
FALL SAFE<sup>®</sup>

**OBERON**<sup>™</sup>

**CURV-0-MARK**<sup>®</sup>

**dn**  
duenorth

**KI**  
SERIES

**NEOS**

**MEGA**<sup>™</sup>  
COMFORT



[www.surewerx.eu](http://www.surewerx.eu)

**USA:** SureWerx USA Inc.,  
325 Corporate Drive,  
Elgin, IL, USA 60123  
[surewerx.com/usa](http://surewerx.com/usa)

**Canada:** SureWerx,  
49 Schooner St.,  
Coquitlam, BC V3K 0B3  
[surewerx.com/ca](http://surewerx.com/ca)

**Europe & UK:** SureWerx UK Ltd.  
PO Box 18759, Solihull,  
England, B93 3NA, UK  
[surewerx.eu](http://surewerx.eu)




Follow us on Social Media  
SureWerx Europe



**SureWerx**<sup>®</sup>

Be Smart. Be Safe. Be Sure.<sup>®</sup>



6 26053 61437 9

Price 20€ J2021-1 EN 01-2025